

## 200mW, 2V - 75V Zener Diode

### FEATURES

- Constant voltage control
- Wide voltage range selection 2.0V to 75V
- $V_Z$  tolerance selection of  $\pm 5\%$
- Surface mount device type
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Low voltage stabilizers or voltage references
- Adapters
- Lighting application
- On-board DC/DC converter

### MECHANICAL DATA

- Case: SOD-323F
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 3.40mg (approximately)

| KEY PARAMETERS |            |      |
|----------------|------------|------|
| PARAMETER      | VALUE      | UNIT |
| $P_D$          | 200        | mW   |
| $V_Z$          | 2 - 75     | V    |
| $T_{J\ MAX}$   | 150        | °C   |
| Package        | SOD-323F   |      |
| Configuration  | Single die |      |



SOD-323F



| ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) |           |             |      |
|---|-----------|-------------|------|
| PARAMETER   | SYMBOL    | VALUE       | UNIT |
| Power dissipation   | $P_D$     | 200         | mW   |
| Junction temperature range  | $T_J$     | -55 to +150 | °C   |
| Storage temperature range   | $T_{STG}$ | -55 to +150 | °C   |

**ELECTRICAL SPECIFICATIONS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

| PART<br>NUMBER | MARKING<br>CODE | ZENER<br>VOLTAGE  |     |       | REGULAR<br>IMPEDANCE | TEST<br>CURRENT | REGULAR<br>IMPEDANCE | TEST<br>CURRENT | LEAKAGE<br>CURRENT   |     |
|----------------|-----------------|-------------------|-----|-------|----------------------|-----------------|----------------------|-----------------|----------------------|-----|
|                |                 | $V_Z @ I_Z^{(1)}$ |     |       | $Z_{ZT} @ I_Z$       | $I_Z$           | $Z_{ZK} @ I_{ZK}$    | $I_{ZK}$        | $I_R @ V_R$          |     |
|                |                 | Min               | Typ | Max   | $\Omega$<br>Max      | mA              | $\Omega$<br>Max      | mA              | $\mu\text{A}$<br>Max | V   |
| M3Z2V0C        | 2v0             | 1.9               | 2.0 | 2.1   | 100                  | 5               | 600                  | 1               | 120                  | 1   |
| M3Z2V2C        | 2v2             | 2.09              | 2.2 | 2.31  | 100                  | 5               | 600                  | 1               | 120                  | 1   |
| M3Z2V4C        | 2v4             | 2.2               | 2.4 | 2.6   | 90                   | 5               | 600                  | 1               | 120                  | 1   |
| M3Z2V7C        | 2v7             | 2.5               | 2.7 | 2.90  | 90                   | 5               | 600                  | 1               | 100                  | 1   |
| M3Z3V0C        | 3v0             | 2.8               | 3.0 | 3.2   | 85                   | 5               | 600                  | 1               | 50                   | 1   |
| M3Z3V3C        | 3v3             | 3.1               | 3.3 | 3.5   | 85                   | 5               | 600                  | 1               | 20                   | 1   |
| M3Z3V6C        | 3v6             | 3.4               | 3.6 | 3.8   | 85                   | 5               | 600                  | 1               | 10                   | 1   |
| M3Z3V9C        | 3v9             | 3.7               | 3.9 | 4.1   | 85                   | 5               | 600                  | 1               | 5                    | 1   |
| M3Z4V3C        | 4v3             | 4.0               | 4.3 | 4.6   | 80                   | 5               | 600                  | 1               | 5                    | 1   |
| M3Z4V7C        | 4v7             | 4.4               | 4.7 | 5.0   | 70                   | 5               | 500                  | 1               | 2                    | 1   |
| M3Z5V1C        | 5v1             | 4.8               | 5.1 | 5.4   | 50                   | 5               | 480                  | 1               | 2                    | 1.5 |
| M3Z5V6C        | 5v6             | 5.32              | 5.6 | 5.88  | 30                   | 5               | 400                  | 1               | 1                    | 2   |
| M3Z6V2C        | 6v2             | 5.89              | 6.2 | 6.51  | 10                   | 5               | 150                  | 1               | 1                    | 3   |
| M3Z6V8C        | 6v8             | 6.46              | 6.8 | 7.14  | 10                   | 5               | 80                   | 1               | 0.5                  | 4   |
| M3Z7V5C        | 7v5             | 7.11              | 7.5 | 7.86  | 10                   | 5               | 50                   | 1               | 0.5                  | 5   |
| M3Z8V2C        | 8v2             | 7.79              | 8.2 | 8.61  | 10                   | 5               | 50                   | 1               | 0.5                  | 6   |
| M3Z9V1C        | 9v1             | 8.65              | 9.1 | 9.56  | 10                   | 5               | 50                   | 1               | 0.5                  | 7   |
| M3Z10VC        | 10              | 9.5               | 10  | 10.5  | 15                   | 5               | 70                   | 1               | 0.1                  | 7.5 |
| M3Z11VC        | 11              | 10.45             | 11  | 11.55 | 20                   | 5               | 70                   | 1               | 0.1                  | 8   |
| M3Z12VC        | 12              | 11.4              | 12  | 12.6  | 20                   | 5               | 90                   | 1               | 0.1                  | 9   |
| M3Z13VC        | 13              | 12.35             | 13  | 13.65 | 26                   | 5               | 110                  | 1               | 0.1                  | 10  |
| M3Z15VC        | 15              | 14.25             | 15  | 15.75 | 30                   | 5               | 110                  | 1               | 0.1                  | 11  |
| M3Z16VC        | 16              | 15.2              | 16  | 16.8  | 40                   | 5               | 170                  | 1               | 0.1                  | 12  |
| M3Z18VC        | 18              | 17.1              | 18  | 18.9  | 45                   | 5               | 170                  | 1               | 0.1                  | 14  |
| M3Z20VC        | 20              | 19                | 20  | 21    | 55                   | 5               | 220                  | 1               | 0.1                  | 15  |
| M3Z22VC        | 22              | 20.9              | 22  | 23.1  | 55                   | 5               | 220                  | 1               | 0.1                  | 17  |
| M3Z24VC        | 24              | 22.8              | 24  | 25.2  | 70                   | 5               | 220                  | 1               | 0.1                  | 19  |
| M3Z27VC        | 27              | 25.65             | 27  | 28.35 | 80                   | 5               | 220                  | 1               | 0.1                  | 20  |
| M3Z30VC        | 30              | 28.5              | 30  | 31.5  | 80                   | 5               | 220                  | 1               | 0.1                  | 22  |
| M3Z33VC        | 33              | 31.35             | 33  | 34.65 | 80                   | 5               | 220                  | 1               | 0.1                  | 24  |
| M3Z36VC        | 36              | 34.2              | 36  | 37.8  | 80                   | 5               | 220                  | 1               | 0.1                  | 27  |
| M3Z39VC        | 39              | 37.05             | 39  | 40.95 | 90                   | 2.5             | 500                  | 0.5             | 0.1                  | 29  |
| M3Z43VC        | 43              | 40.85             | 43  | 45.15 | 90                   | 2.5             | 600                  | 0.5             | 0.1                  | 32  |
| M3Z47VC        | 47              | 44.65             | 47  | 49.35 | 110                  | 2.5             | 700                  | 0.5             | 0.1                  | 35  |
| M3Z51VC        | 51              | 48.45             | 51  | 53.55 | 125                  | 2.5             | 700                  | 0.5             | 0.1                  | 38  |
| M3Z56VC        | 56              | 53.2              | 56  | 58.8  | 135                  | 2.5             | 1000                 | 0.5             | 0.1                  | 42  |
| M3Z62VC        | 62              | 58.9              | 62  | 65.1  | 150                  | 2.5             | 1000                 | 0.5             | 0.1                  | 47  |
| M3Z68VC        | 68              | 64.6              | 68  | 71.4  | 200                  | 2.5             | 1000                 | 0.5             | 0.1                  | 51  |
| M3Z75VC        | 75              | 71.25             | 75  | 78.75 | 250                  | 2.5             | 1500                 | 0.5             | 0.1                  | 56  |

**Notes:**

1. Pulse test with PW = 10ms

**ORDERING INFORMATION**

| ORDERING CODE <sup>(1)</sup> | PACKAGE  | PACKING      |
|------------------------------|----------|--------------|
| M3ZxC RRG                    | SOD-323F | 3K / 7" Reel |


**Notes:**

1. "x" defines voltage from 2V(M3Z2V0C) to 75V(M3Z75VC)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Zener Breakdown Characteristics**

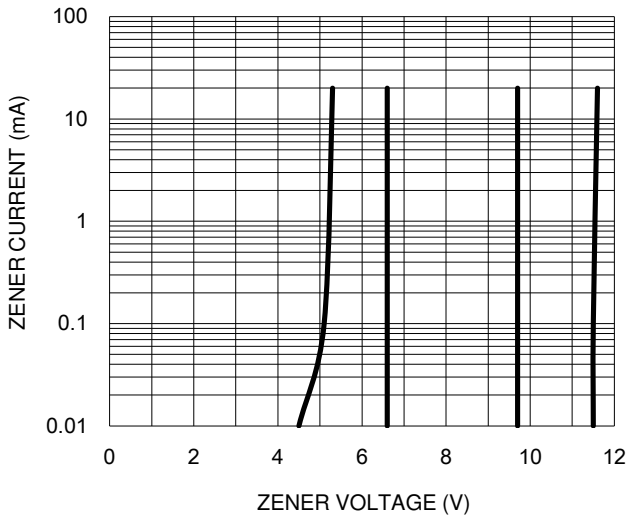


**Fig.2 Zener Breakdown Characteristics**

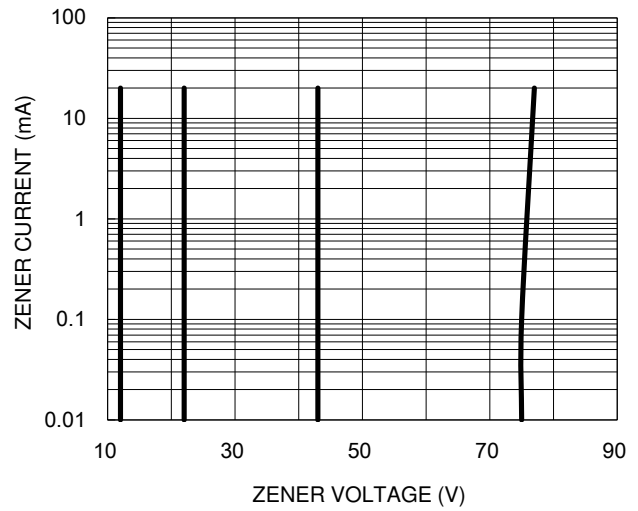

**Fig.3 Typical Forward Voltage**

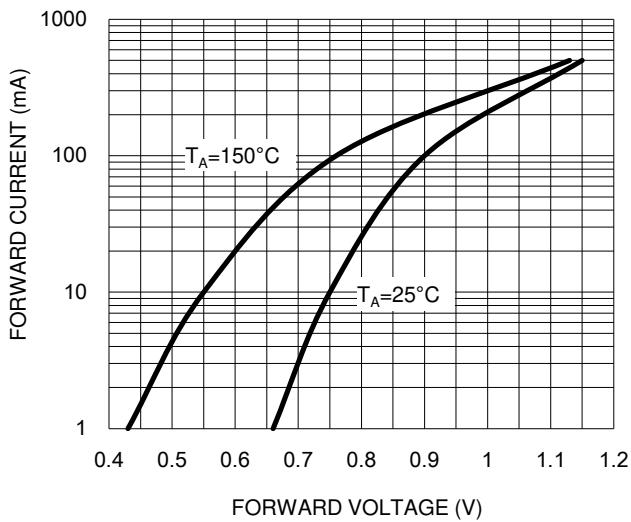


**Fig.4  $V_z$  vs.  $Z_{ZT}$**

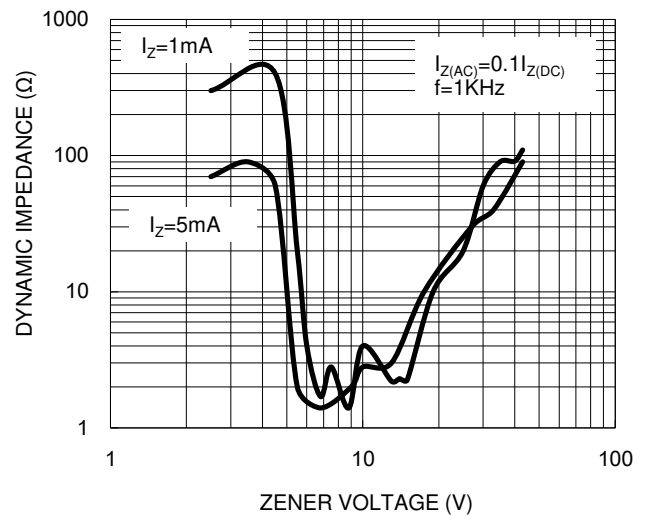


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.5 Typical Capacitance**

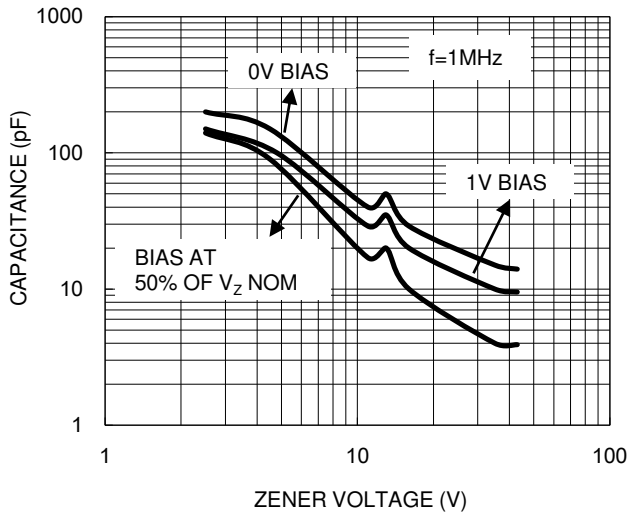

**Fig.6 Typical Leakage Current**

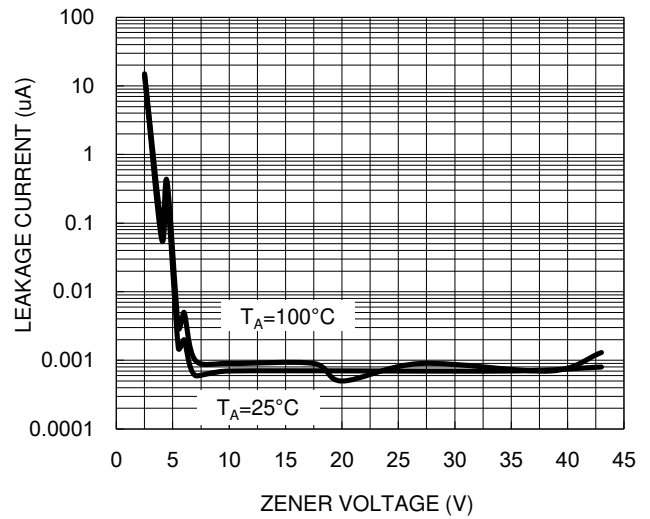


**Fig.7 Power Dissipation**

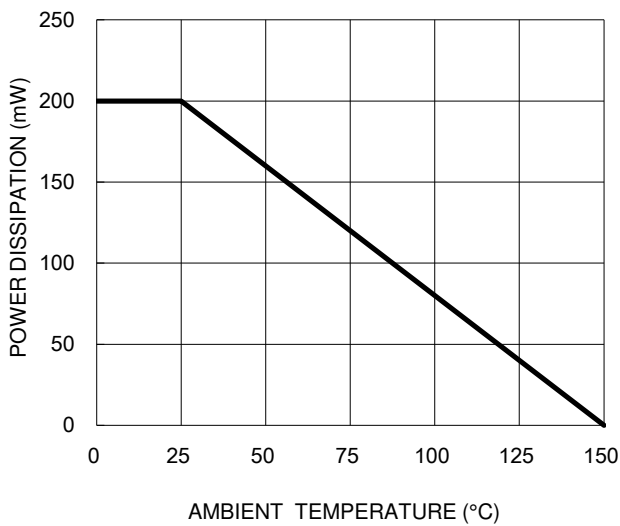


**PACKAGE OUTLINE DIMENSION**

**SOD-323F**

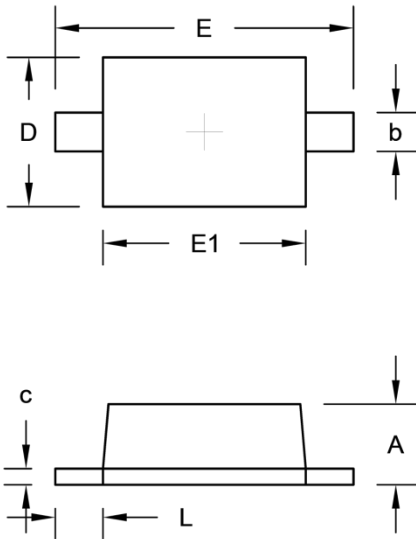

| DIM. | Unit (mm) |      | Unit (inch) |       |
|------|-----------|------|-------------|-------|
|      | Min.      | Max. | Min.        | Max.  |
| A    | 0.60      | 0.75 | 0.024       | 0.030 |
| b    | 0.25      | 0.40 | 0.010       | 0.016 |
| c    | 0.06      | 0.21 | 0.002       | 0.008 |
| D    | 1.15      | 1.35 | 0.045       | 0.053 |
| E    | 2.30      | 2.70 | 0.091       | 0.106 |
| E1   | 1.60      | 1.80 | 0.063       | 0.071 |
| L    | 0.30      | 0.50 | 0.012       | 0.020 |

**SUGGEST PAD LAYOUT**

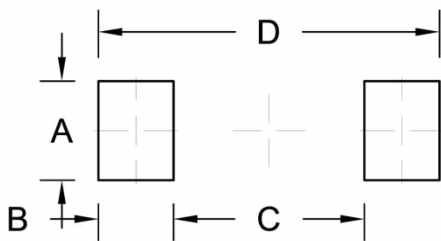

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A      | 0.83      | 0.033       |
| B      | 0.63      | 0.025       |
| C      | 1.60      | 0.063       |
| D      | 2.86      | 0.113       |

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.