

Overview


KEMET Z-SMS Signal Line Multilayer Ferrite Chip Beads are ideal for high frequency noise countermeasures for digital product clock lines and general signal lines. The small size of this ferrite bead makes it suitable for mobile equipment that requires tight space both in dimension and in height. The internal silver printed layer structure creates a closed magnetic circuit which acts as a magnetic shield to minimize heat generation and crosstalk.

Using different type of materials enables to further specialize the function and characteristics of the chip bead:

- 1) Material "A" for broadband noise suppression. Low R-XL frequency cross point and large resistance part work as damping function, suppress unnecessary resonance and keep signal integrity.
- 2) Material "B" for noise suppression above 20 MHz, with increased attenuation. For general use especially effective for video signal lines.
- 3) Material "C" for high frequency noise suppression above 100 MHz. For high speed signal line, effective for clock line.
- 4) Material "D" for noise suppression around 200 MHz, effective for EMC regulations.
- 5) Material "E" for strongly suppressing unnecessary resonance from low frequency range, due to lower R-XL frequency cross point compared to material "A".
- 6) Material "F" for noise countermeasures around LSI power supplies. This is a low DC resistance version of material "A".

Applications

- PC, tablet, peripherals
- Interfaces, harness connectors
- Mobile and portable equipment

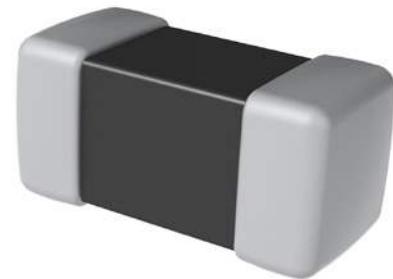

Benefits

- Miniature and low profile
- No grounding needed for flexible circuit design
- Prevents interference between circuits in mobile systems
- Broad range of impedance values
- Impedance value from 10 – 2,500 Ω
- Rated current range from 0.1 – 1.5 A
- Operating temperature range from –55°C to +125°C

Part Number System

| Z | 0201 | C | 800 | A | SMS | T |
|--------------|--|----------------|--|--|---|-----------------|
| Ferrite Bead | EIA Case Size (L" x W") | Specification | Impedance Value (Ω) at 100 MHz | Material | Series | Packaging |
| | 0201 (0603 in mm) 0402 (1005 in mm) 0603 (1608 in mm) 0805 (2012 in mm) | C = Commercial | The first two digits represent the impedance value. The third digit indicates the number of zeros to be added. Examples: 800 = 80 Ω 101 = 100 Ω 102 = 1000 Ω | A = for broadband noise suppression B = for noise suppression above 20 MHz, with increased attenuation C = for high frequency noise suppression above 100 MHz D = for noise suppression around 200 MHz E = for strongly suppressing unnecessary resonance from low frequency range, lower R-XL frequency cross point version of A F = for noise countermeasures around LSI power supplies, low DCR version of A | SMS = Signal Line Multilayer Ferrite Chip Beads | T = Tape & Reel |

Dimensions – Millimeters (Inches)

| Dimensions - Millimeters (Inches) | | | | | | Land Pattern - Millimeters | | |
|-----------------------------------|------------------|--|-------------------------------|-------------------------------|-------------------------------|----------------------------|-------------|-------------|
| | | | | | | | | |
| EIA Size Code | Metric Size Code | L Length | W Width | T Thickness | B Bandwidth | A | B | C |
| 0201 | 0603 | 0.60 (0.024) ±0.03 (0.001) | 0.30 (0.012) ±0.03 (0.001) | 0.30 (0.012) ±0.03 (0.001) | 0.15 (0.006) ±0.05 (0.002) | 0.20 ~ 0.30 | 0.20 ~ 0.30 | 0.25 ~ 0.40 |
| 0402 | 1005 | 1.00 (0.039) ±0.05 (0.002) | 0.50 (0.020) ±0.05 (0.002) | 0.50 (0.020) ±0.05 (0.002) | 0.25 (0.010) ±0.10 (0.004) | 0.45 ~ 0.55 | 0.40 ~ 0.50 | 0.45 ~ 0.55 |
| 0630 | 1608 | 1.60 (0.063) ±0.15 (0.006) | 0.80 (0.031) ±0.15 (0.006) | 0.80 (0.031) ±0.15 (0.006) | 0.30 (0.012) ±0.20 (0.008) | 0.80 ~ 1.00 | 0.60 ~ 0.80 | 0.60 ~ 0.80 |
| 0805 | 2012 | 2.00 (0.079) +0.30/-0.10 (+0.012/-0.004) | 1.25 (0.049) ±0.20 (0.008) | 0.85 (0.033) ±0.2 (0.008) | 0.50 (0.020) ±0.30 (0.012) | 0.80 ~ 1.20 | 0.80 ~ 1.20 | 0.90 ~ 1.60 |
| | | | | 1.25 (0.049) ±0.2 (0.008) | | | | |

Performance Characteristics

| Item | Performance Characteristics |
|--------------------------------|--|
| Impedance Range at 100 MHz | 10 – 2,500 Ω |
| Impedance Tolerance at 100 MHz | ±25% |
| Rated Current Range | 0.1 – 1.5 A maximum |
| Rated DC Resistance Range | 0.03 – 1.5 Ω maximum |
| Operating Temperature Range | -55°C to +125°C (includes self temperature rise) |

Environmental Compliance

All KEMET Ferrite Beads are RoHS and REACH Compliant.



Table 1 – Ratings & Part Number Reference

| Part Number | Impedance (Ω) at 100 MHz | Impedance Tolerance | Rated Current (A) Maximum | DC Resistance (Ω) Maximum |
|----------------|--------------------------------------|------------------------|------------------------------|---------------------------------------|
| Z0201C220ASMST | 22 | $\pm 25\%$ | 0.500 | 0.065 |
| Z0201C330ASMST | 33 | $\pm 25\%$ | 0.500 | 0.070 |
| Z0201C800ASMST | 80 | $\pm 25\%$ | 0.200 | 0.400 |
| Z0201C121ASMST | 120 | $\pm 25\%$ | 0.200 | 0.450 |
| Z0201C241ASMST | 240 | $\pm 25\%$ | 0.200 | 0.650 |
| Z0201C601ASMST | 600 | $\pm 25\%$ | 0.150 | 1.200 |
| Z0201C600BSMST | 60 | $\pm 25\%$ | 0.200 | 0.250 |
| Z0201C121BSMST | 120 | $\pm 25\%$ | 0.200 | 0.400 |
| Z0201C241BSMST | 240 | $\pm 25\%$ | 0.200 | 0.800 |
| Z0201C471BSMST | 470 | $\pm 25\%$ | 0.100 | 1.050 |
| Z0201C100CSMST | 10 | $\pm 25\%$ | 0.200 | 0.250 |
| Z0201C220CSMST | 22 | $\pm 25\%$ | 0.200 | 0.450 |
| Z0201C330CSMST | 33 | $\pm 25\%$ | 0.150 | 0.550 |
| Z0201C470CSMST | 47 | $\pm 25\%$ | 0.150 | 0.700 |
| Z0201C560CSMST | 56 | $\pm 25\%$ | 0.100 | 1.000 |
| Z0201C121CSMST | 120 | $\pm 25\%$ | 0.100 | 1.500 |
| Z0402C680ESMST | 68 | $\pm 25\%$ | 0.500 | 0.170 |
| Z0402C121ESMST | 120 | $\pm 25\%$ | 0.450 | 0.240 |
| Z0402C241ESMST | 240 | $\pm 25\%$ | 0.400 | 0.310 |
| Z0402C431ESMST | 430 | $\pm 25\%$ | 0.350 | 0.500 |
| Z0402C601ESMST | 600 | $\pm 25\%$ | 0.300 | 0.600 |
| Z0402C100ASMST | 10 | $\pm 25\%$ | 1.000 | 0.030 |
| Z0402C330ASMST | 33 | $\pm 25\%$ | 0.700 | 0.060 |
| Z0402C680ASMST | 68 | $\pm 25\%$ | 0.700 | 0.100 |
| Z0402C800ASMST | 80 | $\pm 25\%$ | 0.700 | 0.100 |
| Z0402C121ASMST | 120 | $\pm 25\%$ | 0.500 | 0.200 |
| Z0402C241ASMST | 240 | $\pm 25\%$ | 0.400 | 0.300 |
| Z0402C431ASMST | 430 | $\pm 25\%$ | 0.350 | 0.450 |
| Z0402C601ASMST | 600 | $\pm 25\%$ | 0.300 | 0.550 |
| Z0402C102ASMST | 1,000 | $\pm 25\%$ | 0.300 | 0.580 |
| Z0402C121BSMST | 120 | $\pm 25\%$ | 0.300 | 0.180 |
| Z0402C241BSMST | 240 | $\pm 25\%$ | 0.300 | 0.300 |
| Part Number | Impedance | Impedance Tolerance | Rated Current | DC Resistance |

OBSOLETE

Ferrite Beads

Signal Line Multilayer Ferrite Chip Beads Z-SMS









Table 1 – Ratings & Part Number Reference cont.

| Part Number | Impedance (Ω) at 100 MHz | Impedance Tolerance | Rated Current (A) Maximum | DC Resistance (Ω) Maximum |
|----------------|--------------------------------------|------------------------|------------------------------|---------------------------------------|
| Z0402C471BSMST | 470 | $\pm 25\%$ | 0.250 | 0.450 |
| Z0402C601BSMST | 600 | $\pm 25\%$ | 0.250 | 0.500 |
| Z0402C102BSMST | 1,000 | $\pm 25\%$ | 0.150 | 0.700 |
| Z0402C100CSMST | 10 | $\pm 25\%$ | 0.500 | 0.110 |
| Z0402C220CSMST | 22 | $\pm 25\%$ | 0.400 | 0.180 |
| Z0402C330CSMST | 33 | $\pm 25\%$ | 0.400 | 0.250 |
| Z0402C470CSMST | 47 | $\pm 25\%$ | 0.350 | 0.330 |
| Z0402C680CSMST | 68 | $\pm 25\%$ | 0.400 | 0.310 |
| Z0402C121CSMST | 120 | $\pm 25\%$ | 0.350 | 0.450 |
| Z0402C181CSMST | 180 | $\pm 25\%$ | 0.300 | 0.500 |
| Z0402C241CSMST | 240 | $\pm 25\%$ | 0.250 | 0.700 |
| Z0402C182DSMST | 1,800 | $\pm 25\%$ | 0.120 | 0.900 |
| Z0603C121ESMST | 120 | $\pm 25\%$ | 0.600 | 0.150 |
| Z0603C241ESMST | 240 | $\pm 25\%$ | 0.450 | 0.250 |
| Z0603C431ESMST | 430 | $\pm 25\%$ | 0.400 | 0.300 |
| Z0603C601ESMST | 600 | $\pm 25\%$ | 0.300 | 0.400 |
| Z0603C220ASMST | 22 | $\pm 25\%$ | 1.500 | 0.050 |
| Z0603C330ASMST | 33 | $\pm 25\%$ | 1.200 | 0.080 |
| Z0603C470ASMST | 47 | $\pm 25\%$ | 0.900 | 0.100 |
| Z0603C600ASMST | 60 | $\pm 25\%$ | 0.800 | 0.100 |
| Z0603C800ASMST | 80 | $\pm 25\%$ | 0.600 | 0.100 |
| Z0603C121ASMST | 120 | $\pm 25\%$ | 0.500 | 0.180 |
| Z0603C241ASMST | 240 | $\pm 25\%$ | 0.400 | 0.250 |
| Z0603C601ASMST | 600 | $\pm 25\%$ | 0.350 | 0.450 |
| Z0603C102ASMST | 1,000 | $\pm 25\%$ | 0.300 | 0.600 |
| Z0603C121BSMST | 120 | $\pm 25\%$ | 0.350 | 0.200 |
| Z0603C241BSMST | 240 | $\pm 25\%$ | 0.300 | 0.350 |
| Z0603C471BSMST | 470 | $\pm 25\%$ | 0.250 | 0.450 |
| Z0603C601BSMST | 600 | $\pm 25\%$ | 0.250 | 0.600 |
| Z0603C102BSMST | 1,000 | $\pm 25\%$ | 0.200 | 0.700 |
| Z0603C300CSMST | 30 | $\pm 25\%$ | 0.500 | 0.200 |
| Z0603C470CSMST | 47 | $\pm 25\%$ | 0.400 | 0.300 |
| Z0603C560CSMST | 56 | $\pm 25\%$ | 0.400 | 0.300 |
| Z0603C680CSMST | 68 | $\pm 25\%$ | 0.300 | 0.350 |
| Z0603C121CSMST | 120 | $\pm 25\%$ | 0.300 | 0.500 |
| Z0603C181CSMST | 180 | $\pm 25\%$ | 0.250 | 0.650 |
| Z0603C241CSMST | 240 | $\pm 25\%$ | 0.250 | 0.800 |
| Z0603C331CSMST | 330 | $\pm 25\%$ | 0.200 | 0.850 |
| Z0603C431CSMST | 430 | $\pm 25\%$ | 0.200 | 0.850 |
| Z0603C511CSMST | 510 | $\pm 25\%$ | 0.200 | 0.900 |
| Z0603C681CSMST | 680 | $\pm 25\%$ | 0.150 | 1.000 |
| Z0603C751DSMST | 750 | $\pm 25\%$ | 0.300 | 0.600 |
| Z0603C152DSMST | 1,500 | $\pm 25\%$ | 0.250 | 0.750 |
| Z0603C182DSMST | 1,800 | $\pm 25\%$ | 0.200 | 0.850 |
| Z0603C252DSMST | 2,500 | $\pm 25\%$ | 0.200 | 1.100 |
| Z0603C431FSMST | 430 | $\pm 25\%$ | 0.400 | 0.273 |
| Part Number | Impedance | Impedance Tolerance | Rated Current | DC Resistance |







Table 1 – Ratings & Part Number Reference cont.

| Part Number | Impedance (Ω) at 100 MHz | Impedance Tolerance | Rated Current (A) Maximum | DC Resistance (Ω) Maximum |
|--------------------|--------------------------------------|----------------------------|------------------------------|---------------------------------------|
| Z0603C601FSMST | 600 | $\pm 25\%$ | 0.350 | 0.351 |
| Z0603C102FSMST | 1,000 | $\pm 25\%$ | 0.300 | 0.390 |
| Z0805C150ASMST | 15 | $\pm 25\%$ | 1.200 | 0.050 |
| Z0805C220ASMST | 22 | $\pm 25\%$ | 1.200 | 0.050 |
| Z0805C330ASMST | 33 | $\pm 25\%$ | 1.200 | 0.050 |
| Z0805C470ASMST | 47 | $\pm 25\%$ | 1.000 | 0.050 |
| Z0805C750ASMST | 75 | $\pm 25\%$ | 1.000 | 0.100 |
| Z0805C101ASMST | 100 | $\pm 25\%$ | 0.900 | 0.100 |
| Z0805C121ASMST | 120 | $\pm 25\%$ | 0.800 | 0.150 |
| Z0805C241ASMST | 240 | $\pm 25\%$ | 0.600 | 0.200 |
| Z0805C431ASMST | 430 | $\pm 25\%$ | 0.500 | 0.250 |
| Z0805C601ASMST | 600 | $\pm 25\%$ | 0.500 | 0.300 |
| Z0805C102ASMST | 1,000 | $\pm 25\%$ | 0.300 | 0.400 |
| Z0805C121BSMST | 120 | $\pm 25\%$ | 0.800 | 0.150 |
| Z0805C241BSMST | 240 | $\pm 25\%$ | 0.600 | 0.200 |
| Z0805C471BSMST | 470 | $\pm 25\%$ | 0.500 | 0.250 |
| Z0805C601BSMST | 600 | $\pm 25\%$ | 0.500 | 0.250 |
| Z0805C102BSMST | 1,000 | $\pm 25\%$ | 0.400 | 0.350 |
| Z0805C560CSMST | 56 | $\pm 25\%$ | 0.600 | 0.200 |
| Z0805C121CSMST | 120 | $\pm 25\%$ | 0.400 | 0.300 |
| Z0805C241CSMST | 240 | $\pm 25\%$ | 0.300 | 0.350 |
| Z0805C751DSMST | 750 | $\pm 25\%$ | 0.400 | 0.300 |
| Z0805C152DSMST | 1,500 | $\pm 25\%$ | 0.400 | 0.350 |
| Z0805C182DSMST | 1,800 | $\pm 25\%$ | 0.300 | 0.450 |
| Z0805C252DSMST | 2,500 | $\pm 25\%$ | 0.200 | 0.750 |
| Part Number | Impedance | Impedance Tolerance | Rated Current | DC Resistance |







Frequency Characteristics

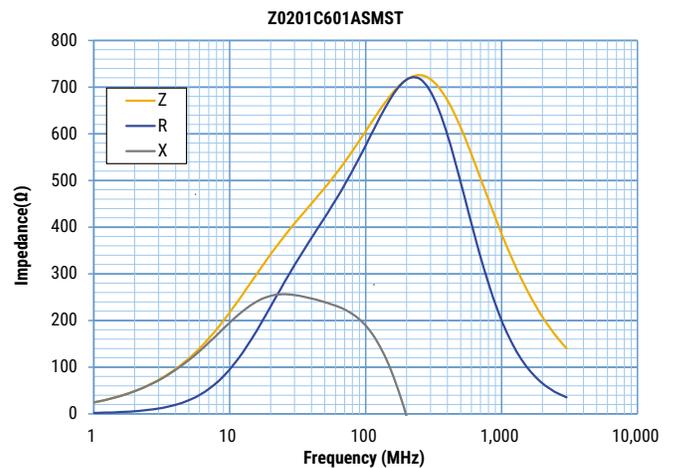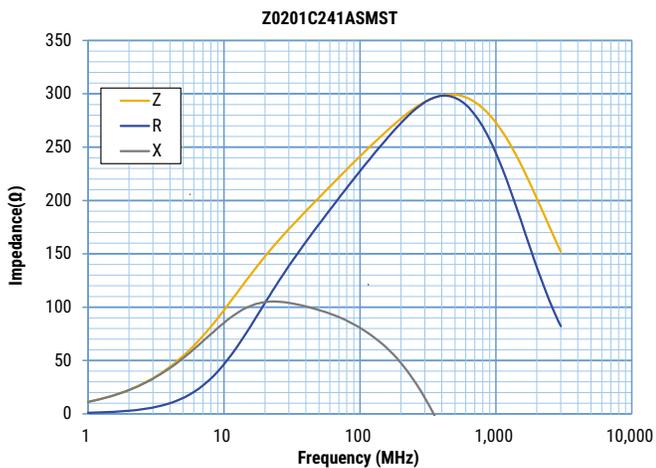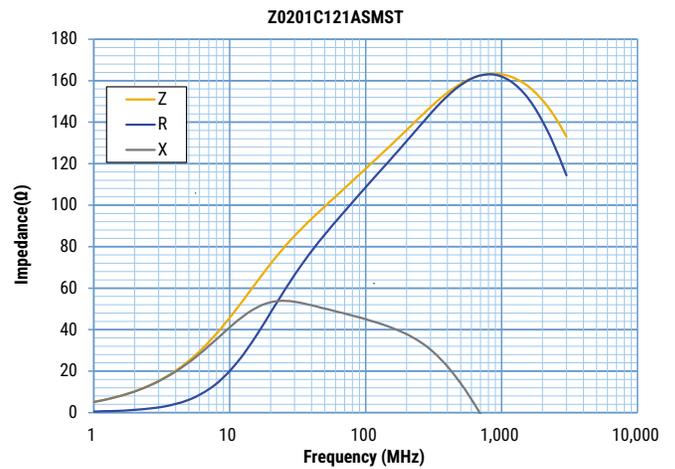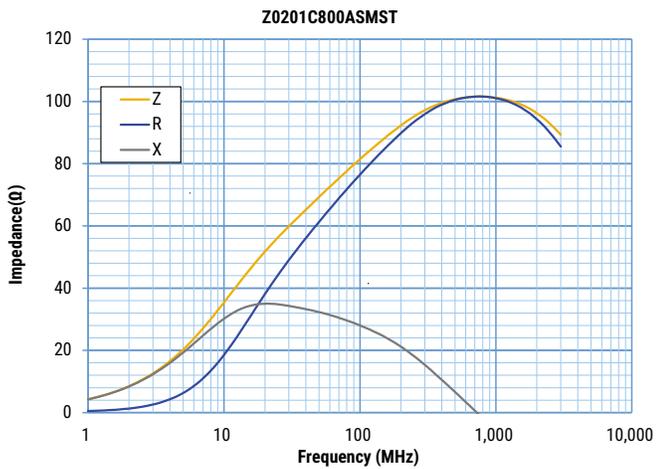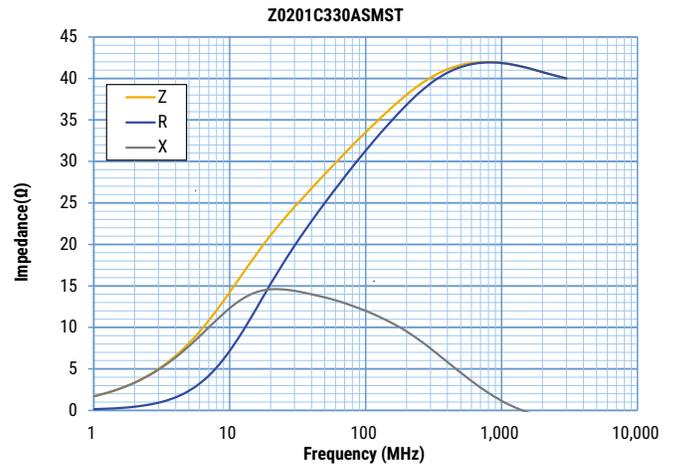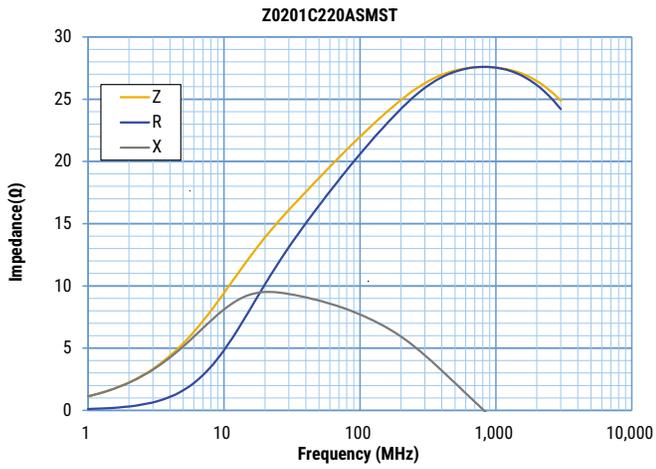







Frequency Characteristics cont.

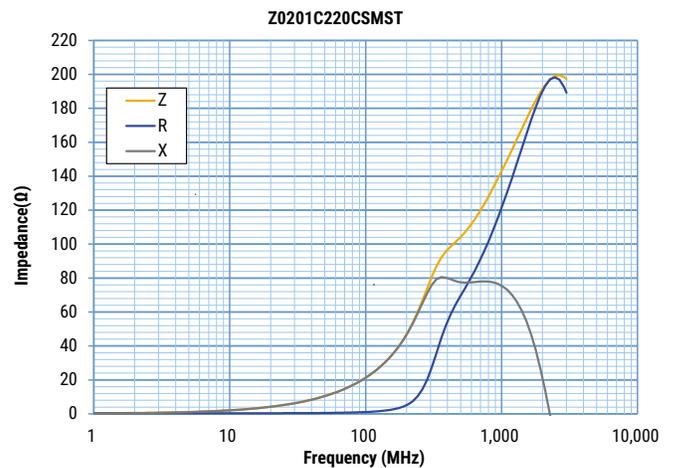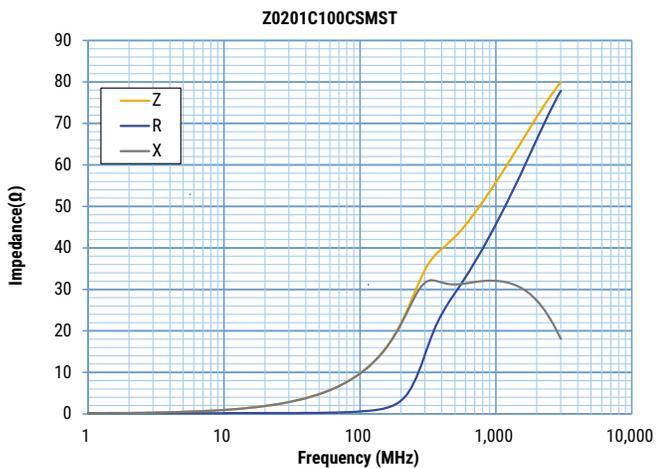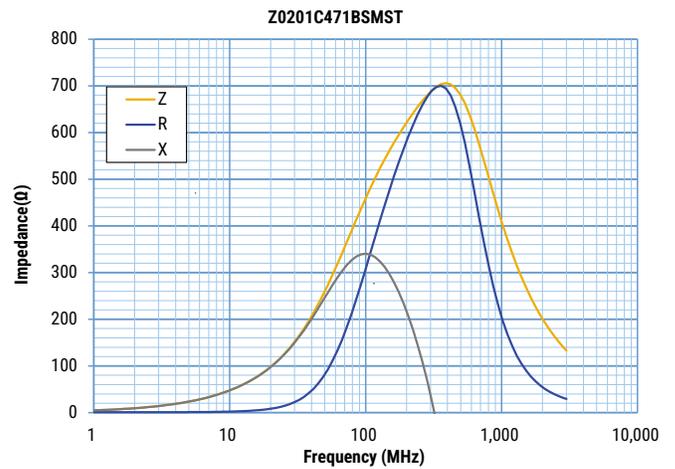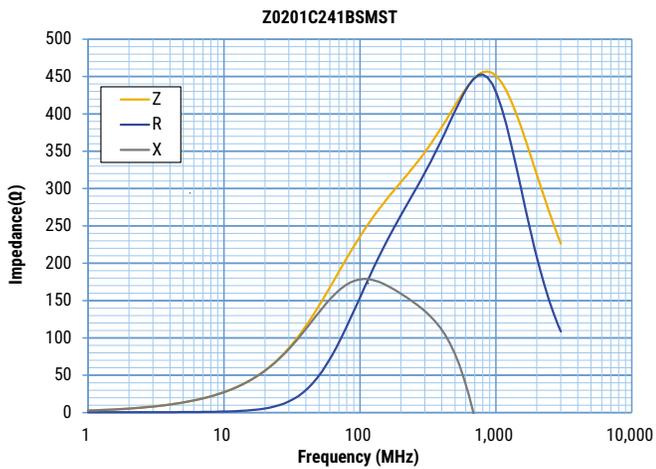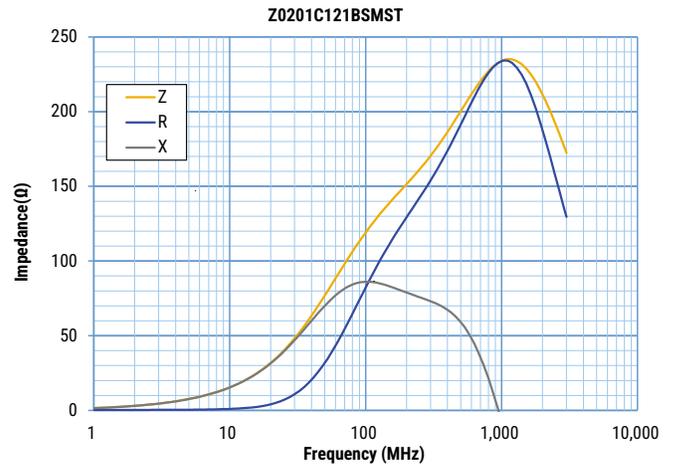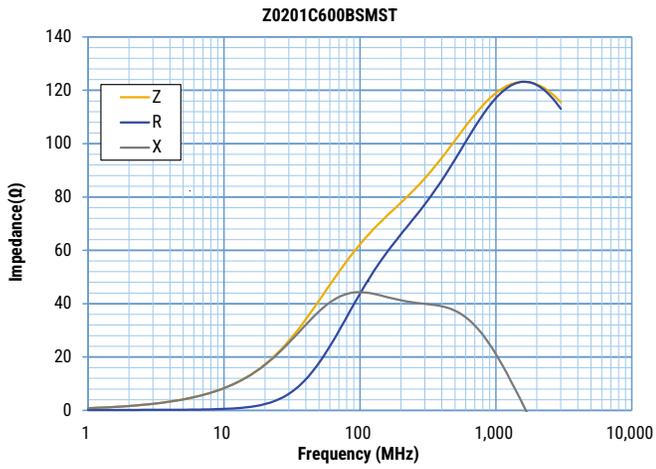







Frequency Characteristics cont.

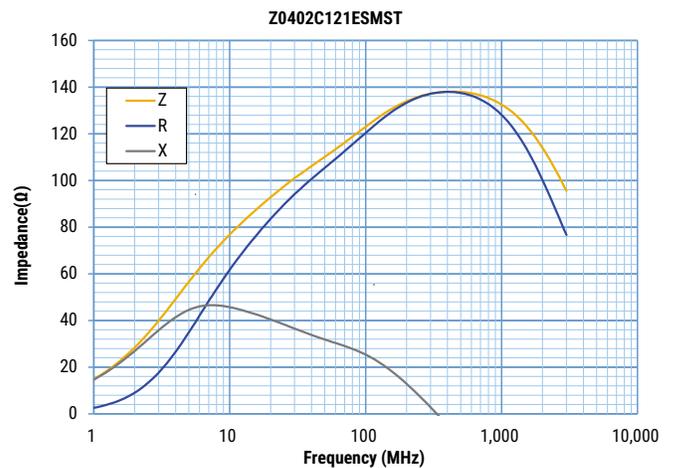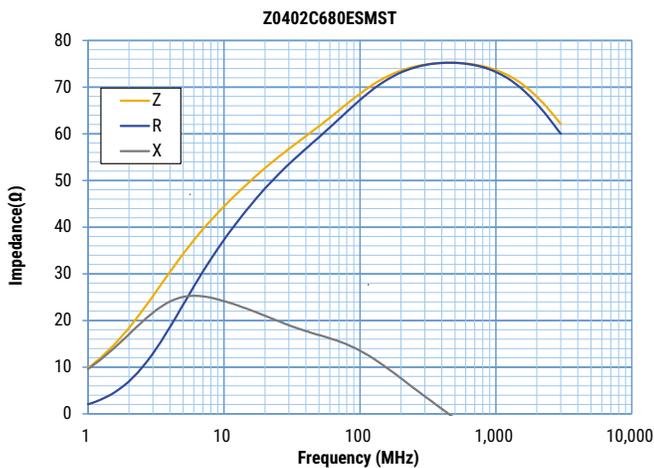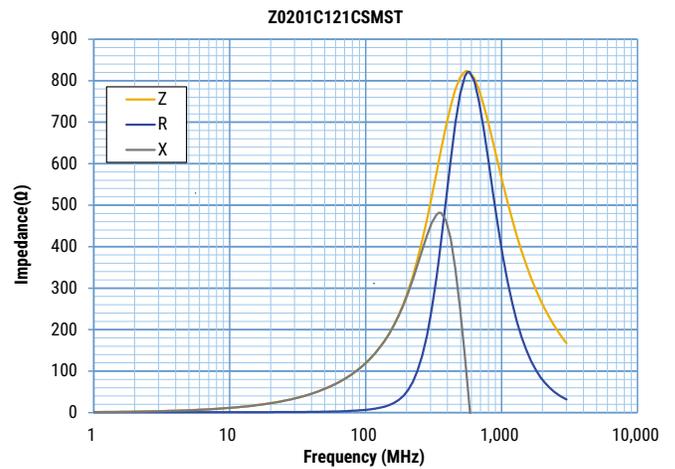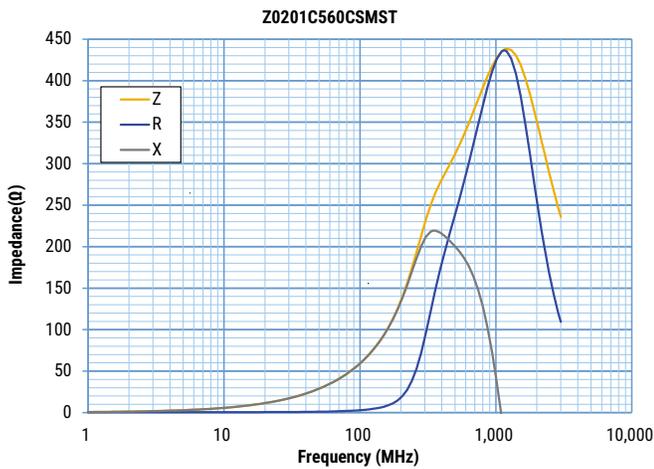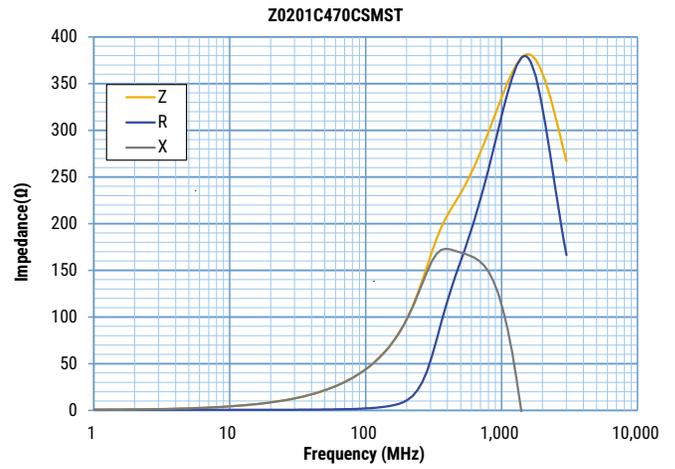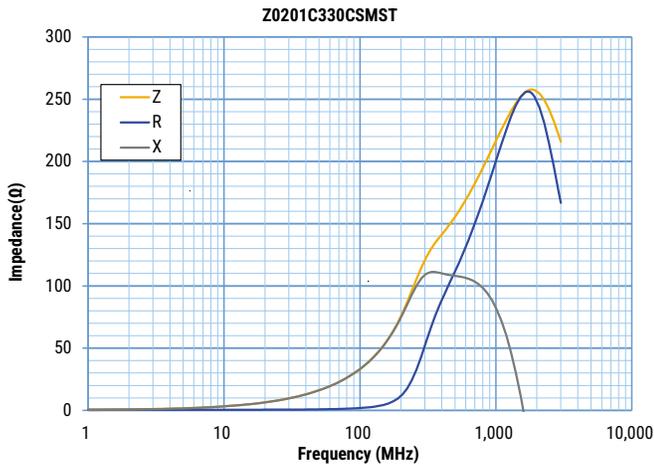







Frequency Characteristics cont.

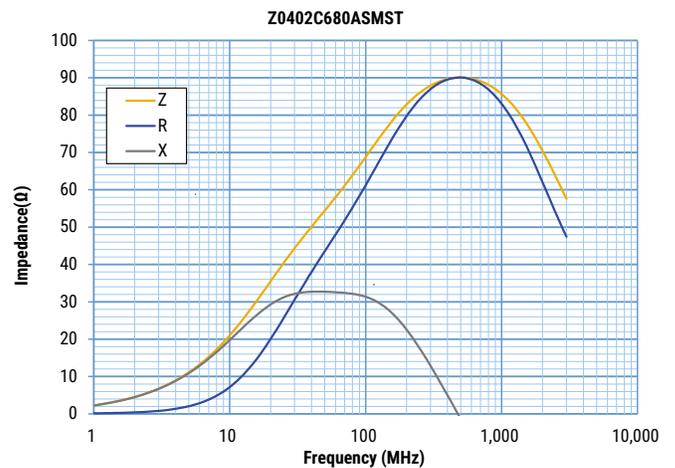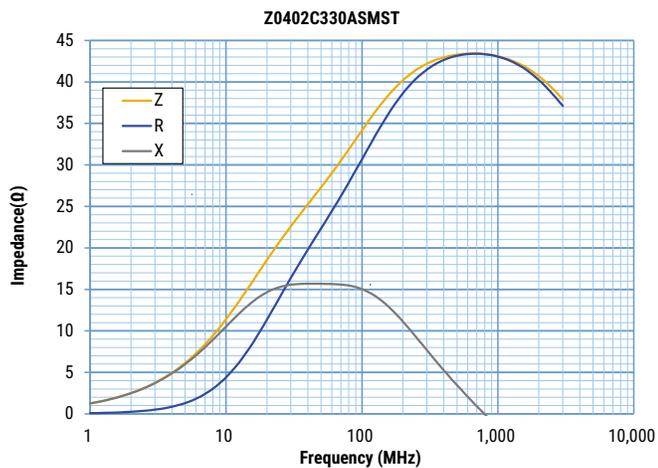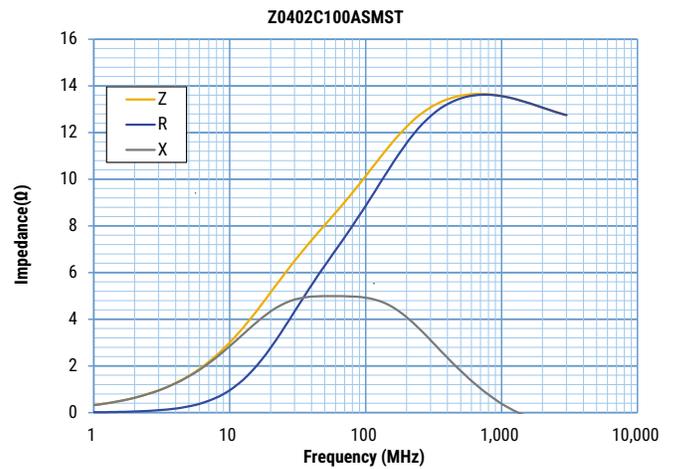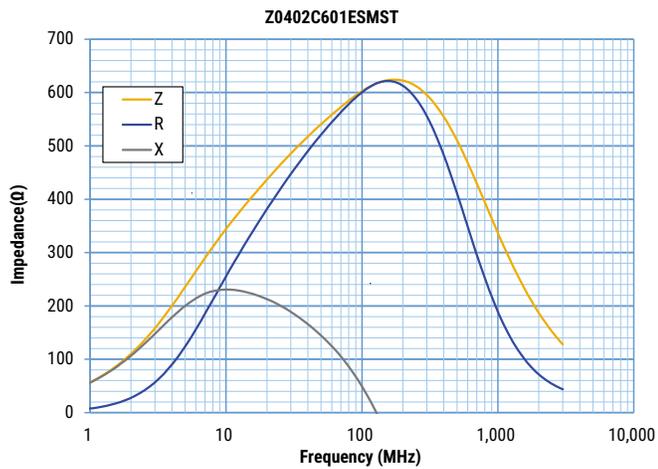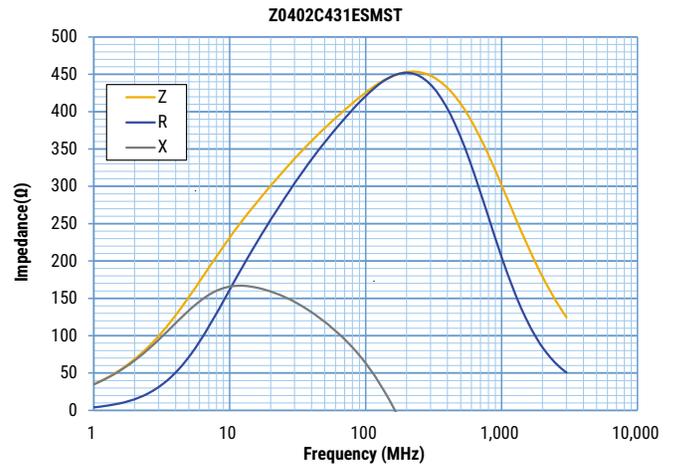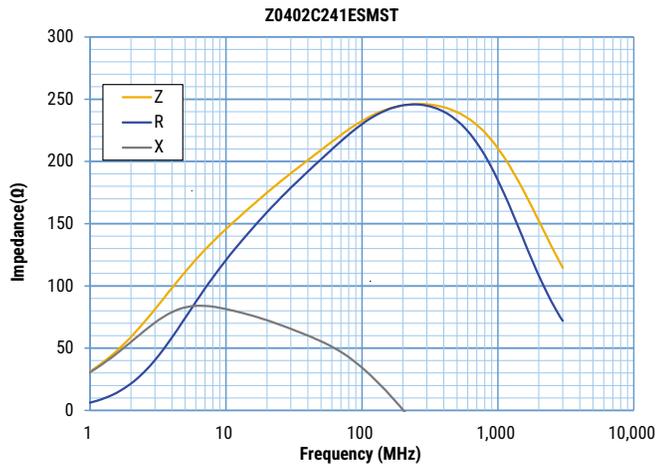







Frequency Characteristics cont.

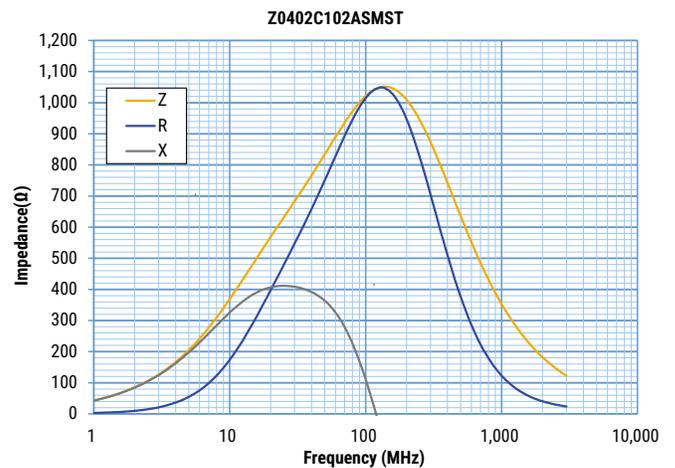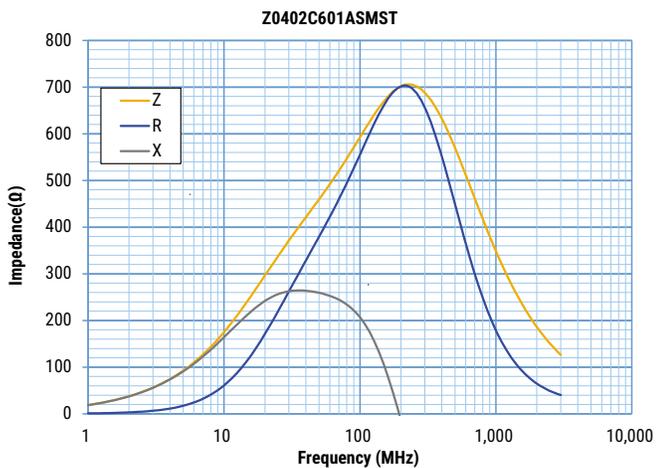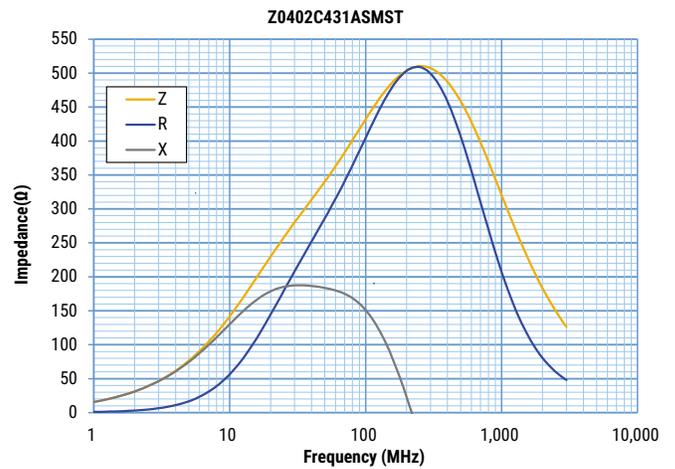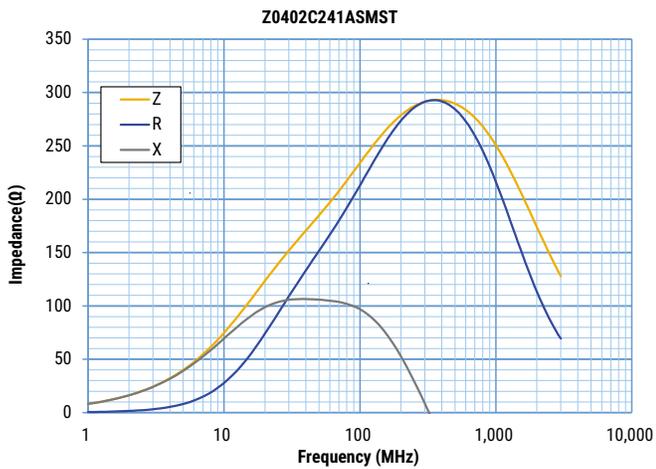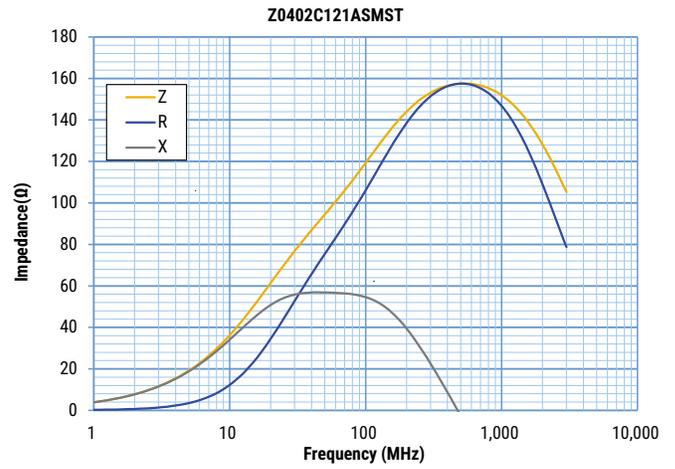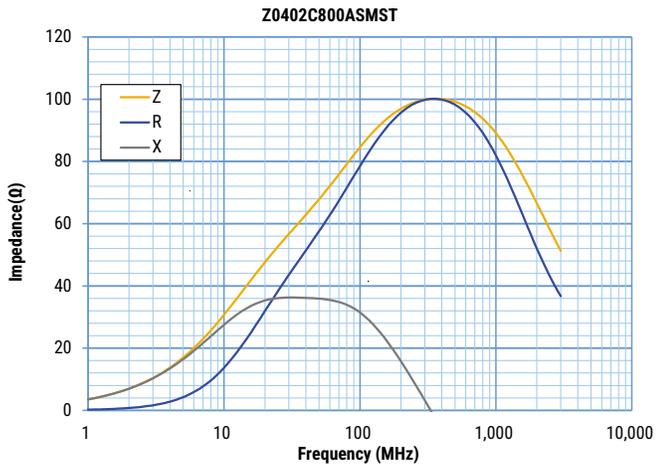







Frequency Characteristics cont.

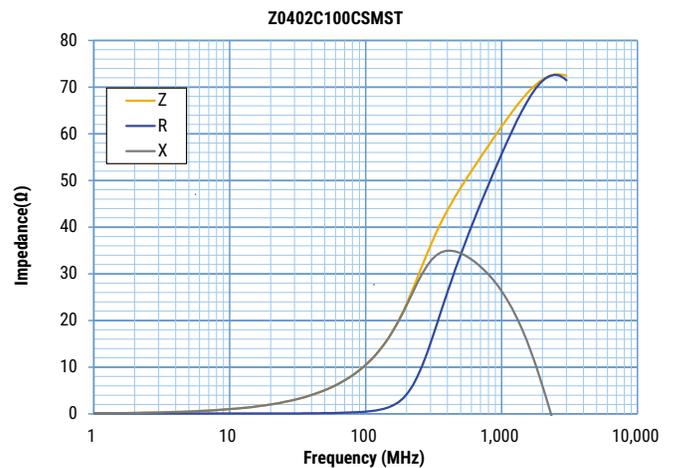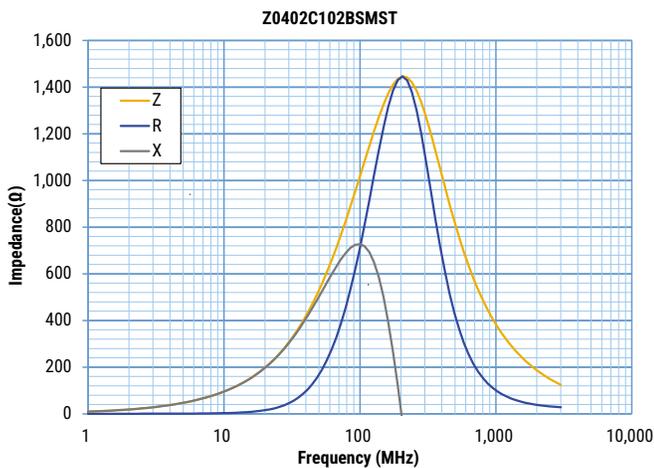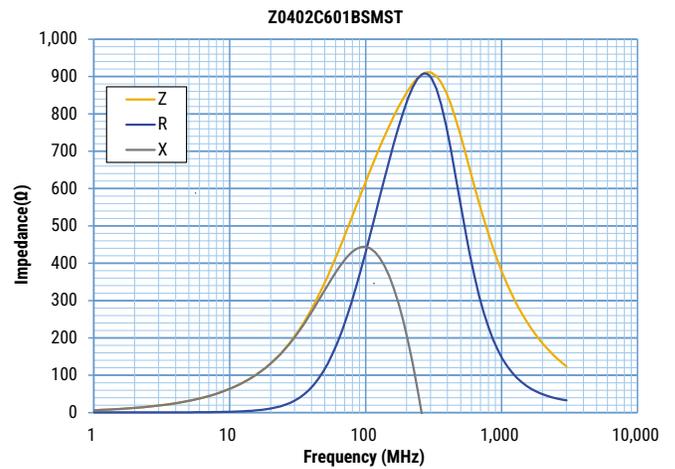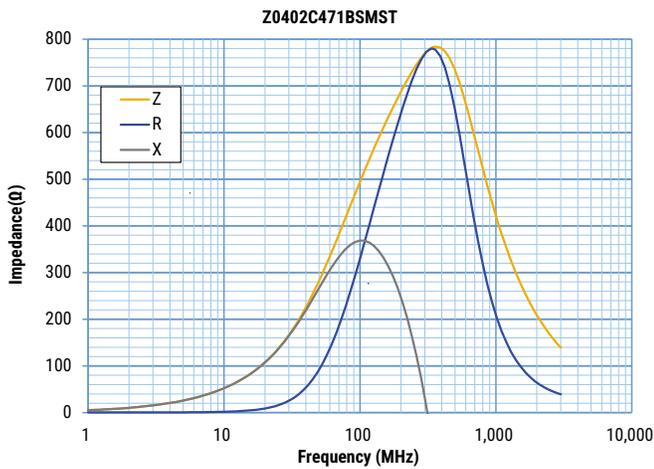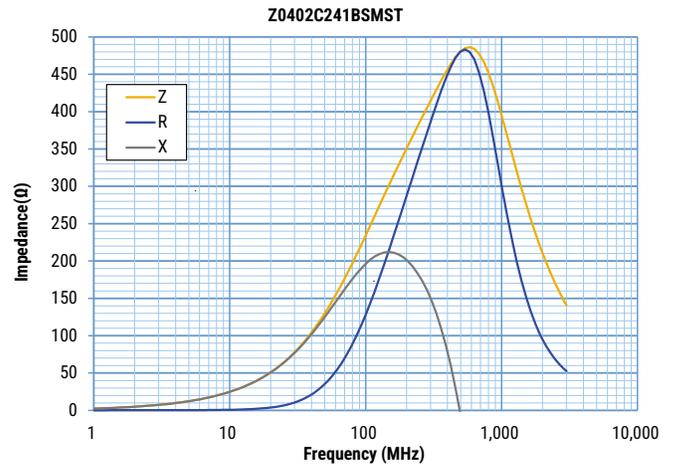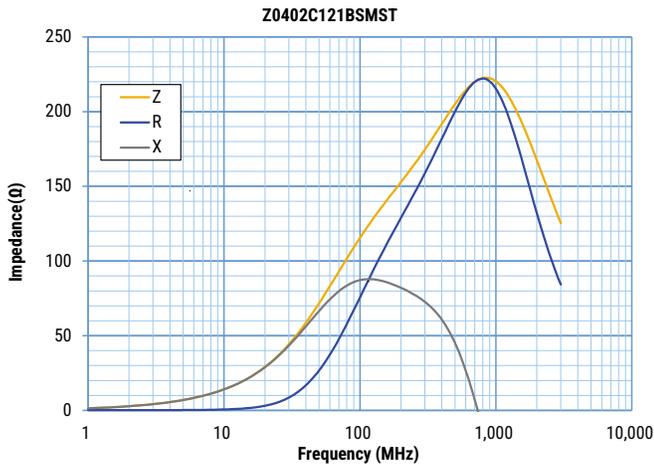







Frequency Characteristics cont.

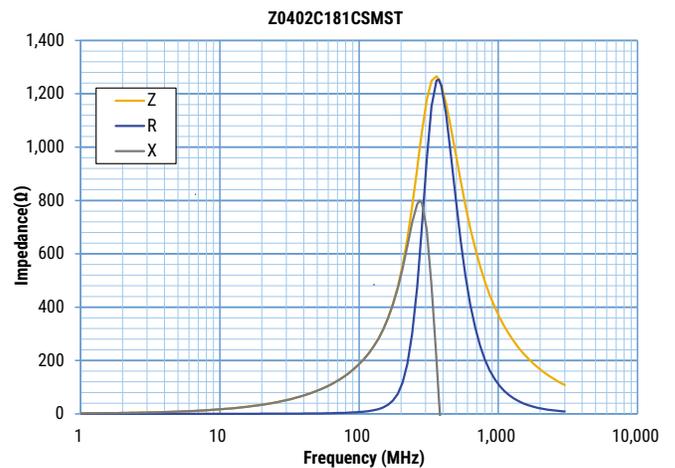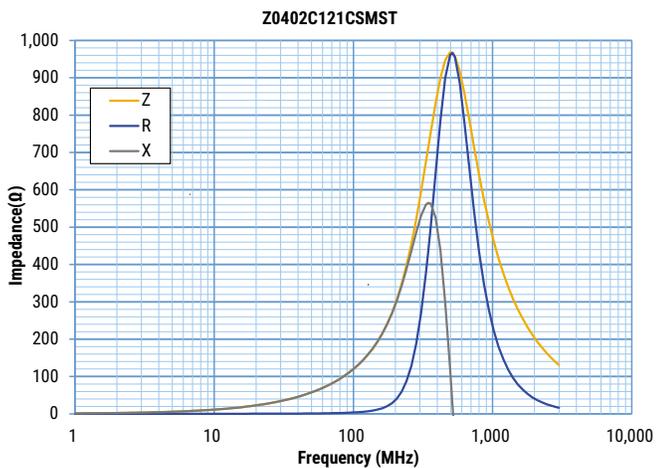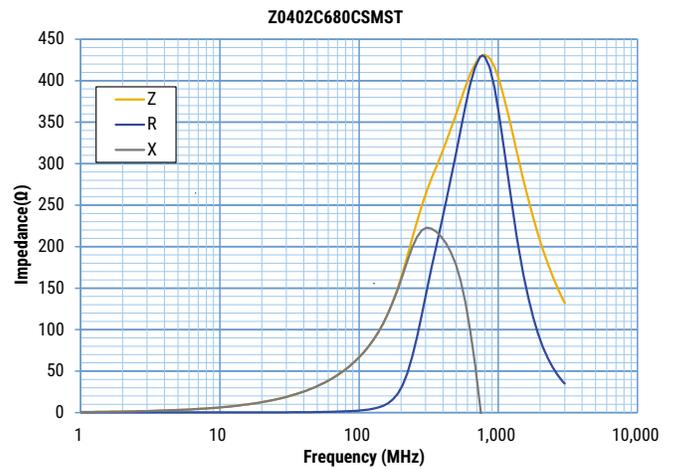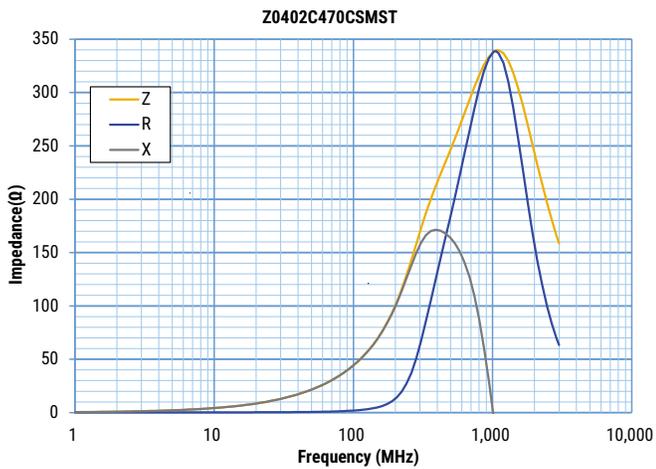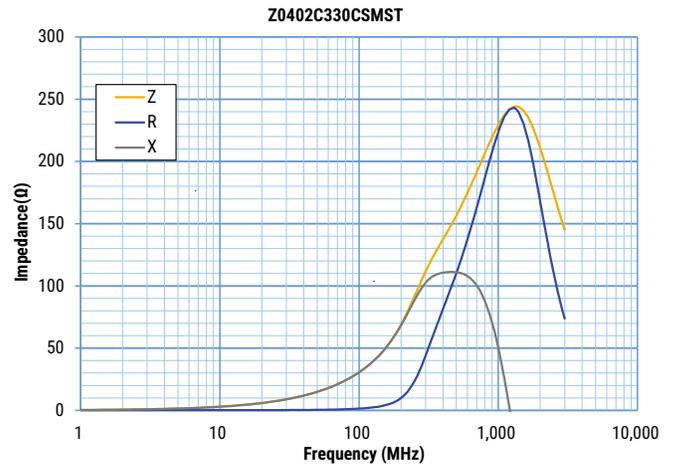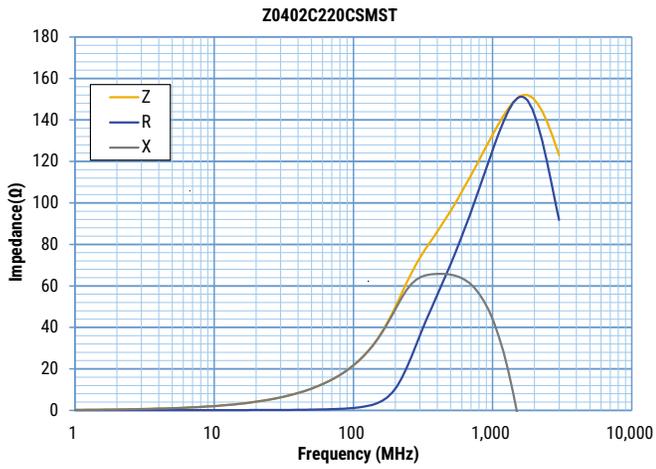







Frequency Characteristics cont.

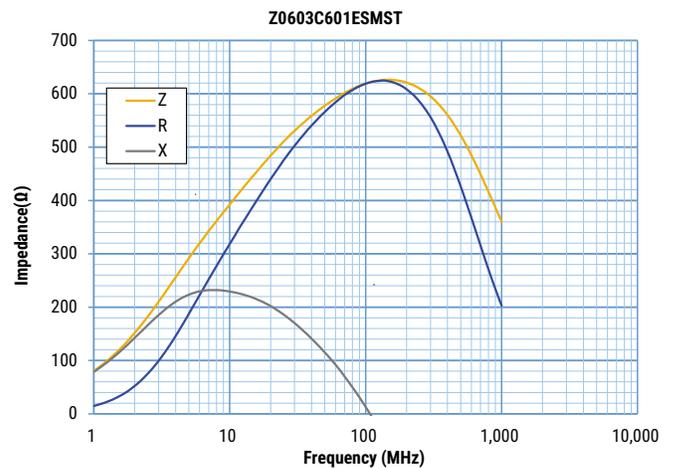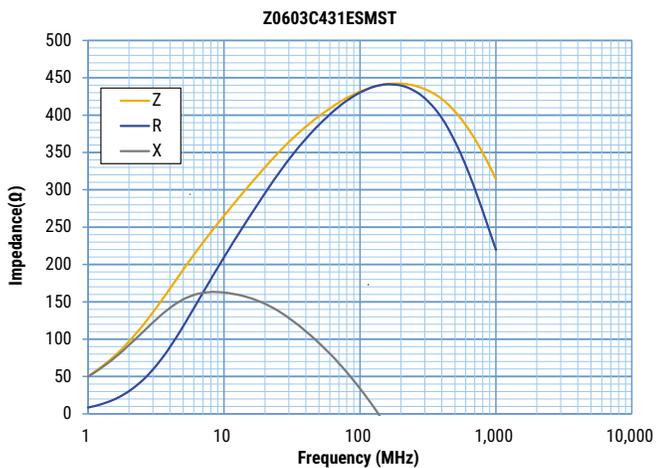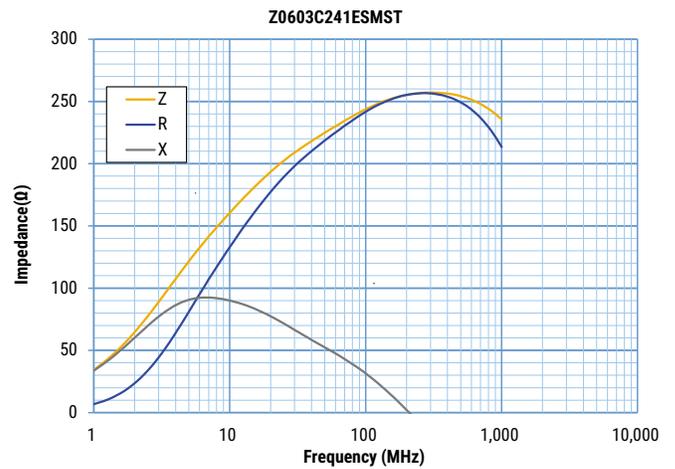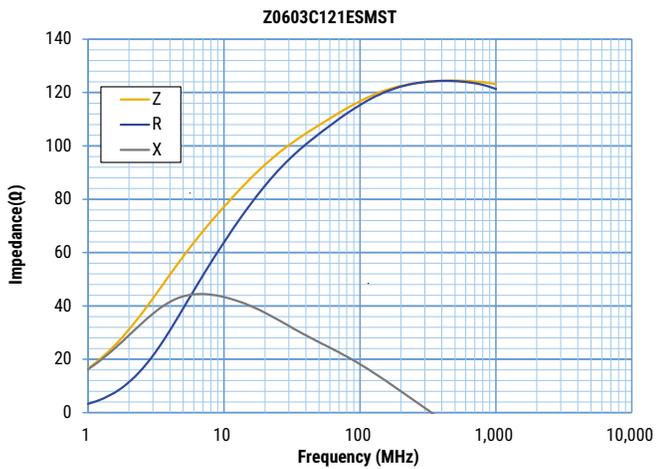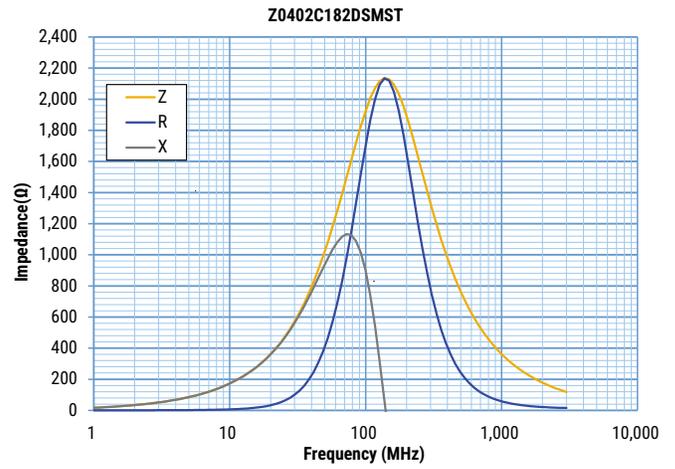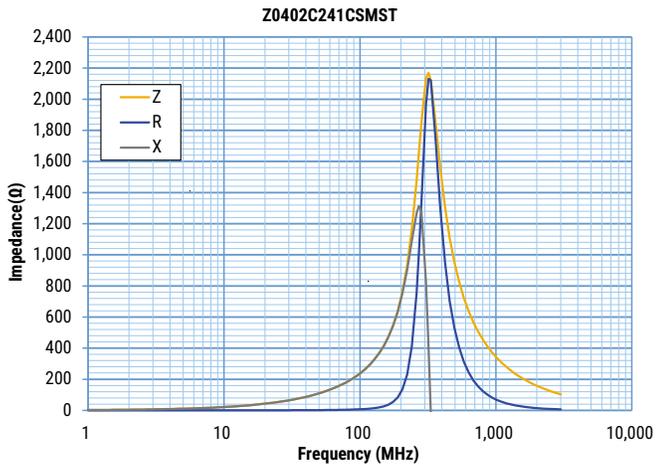







Frequency Characteristics cont.

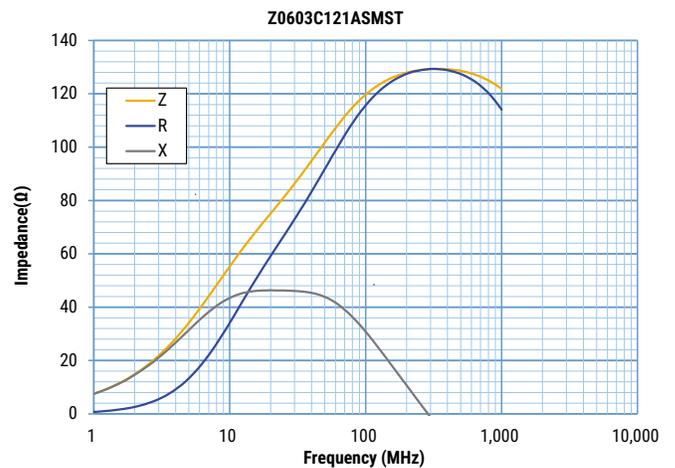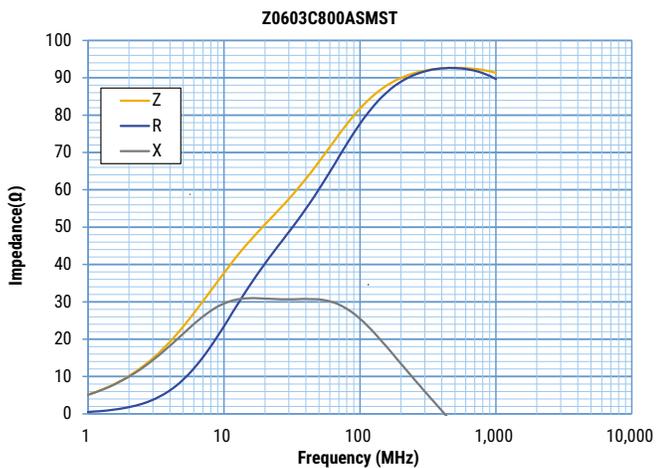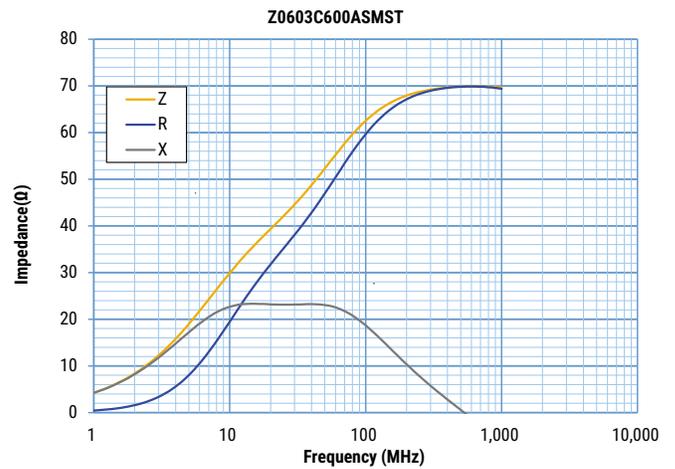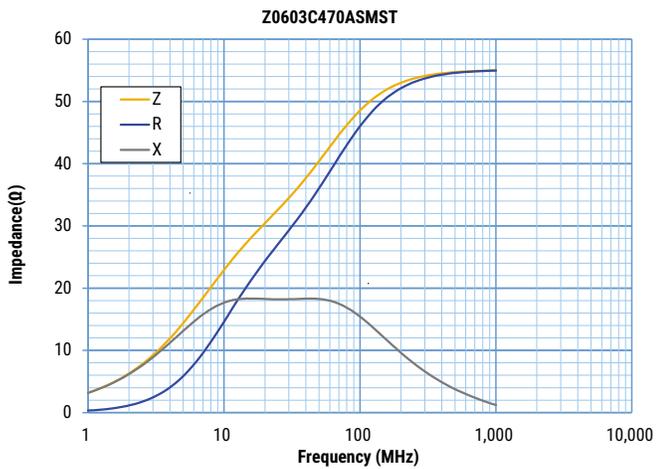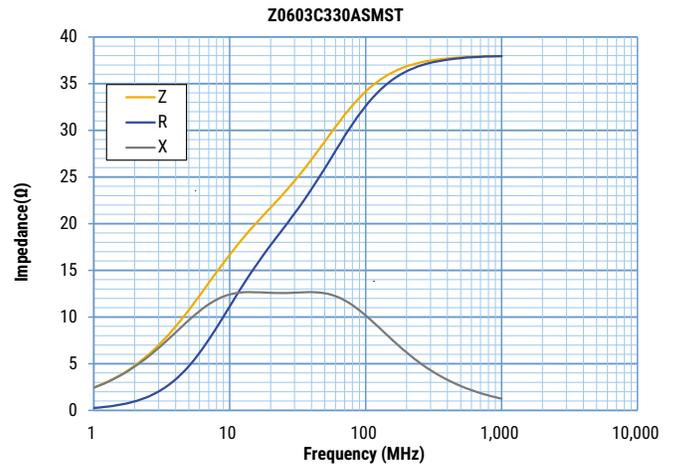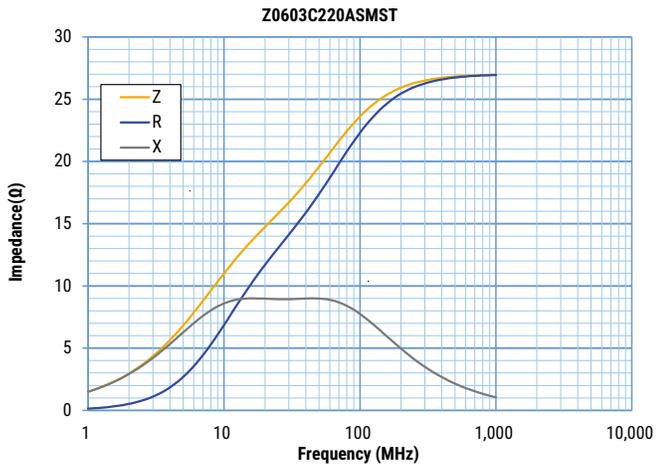







Frequency Characteristics cont.

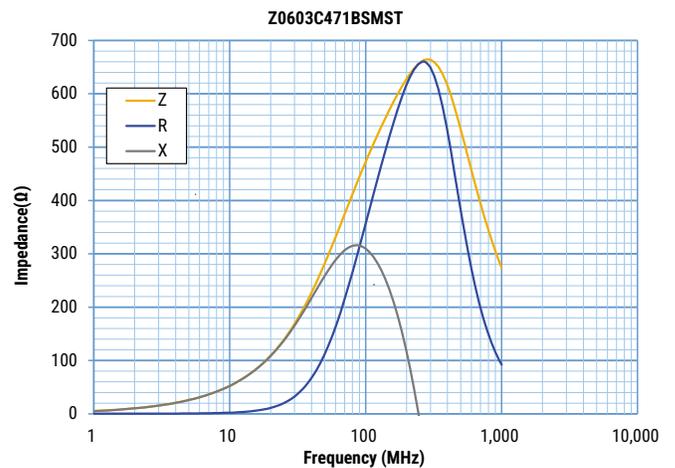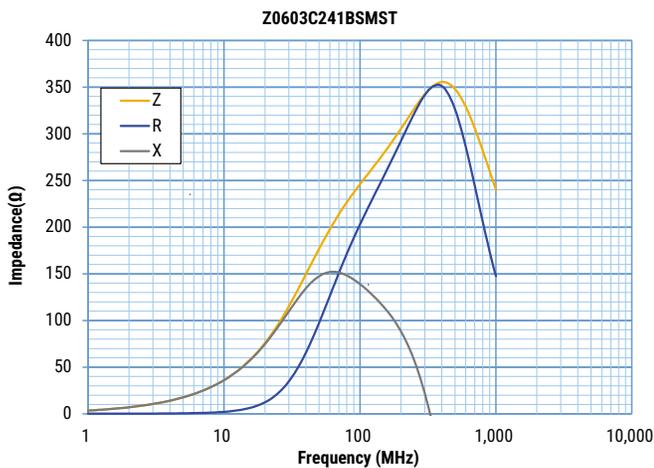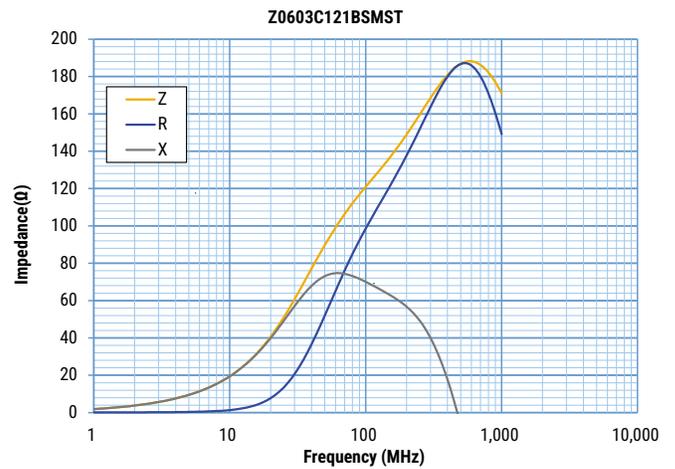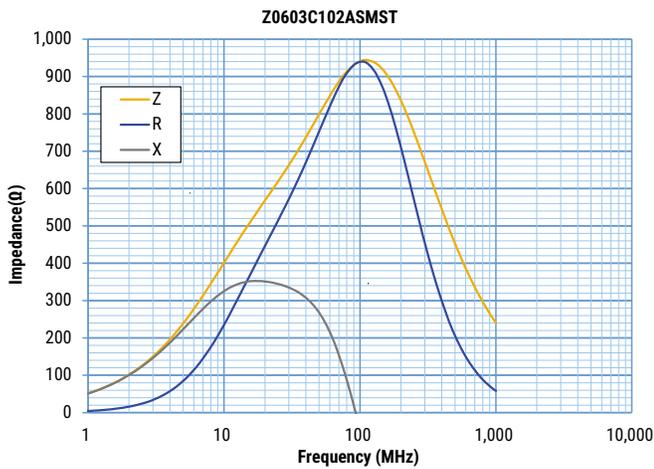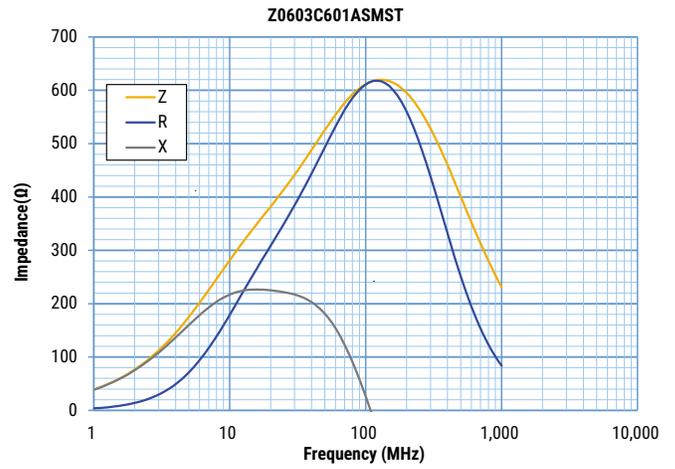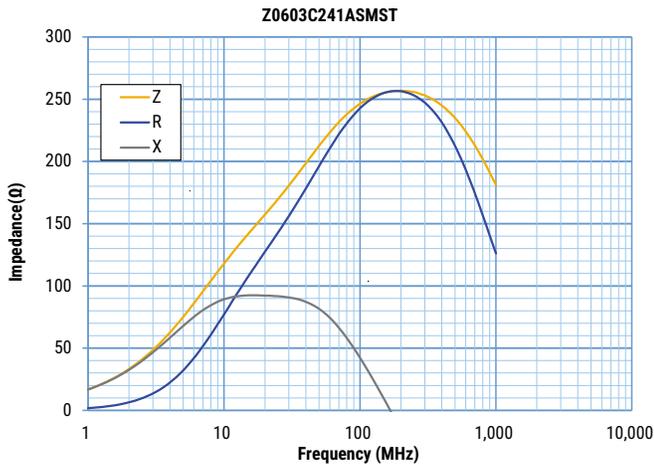







Frequency Characteristics cont.

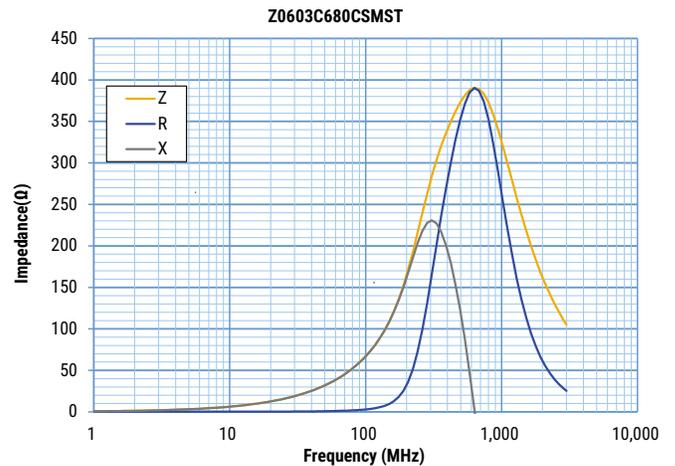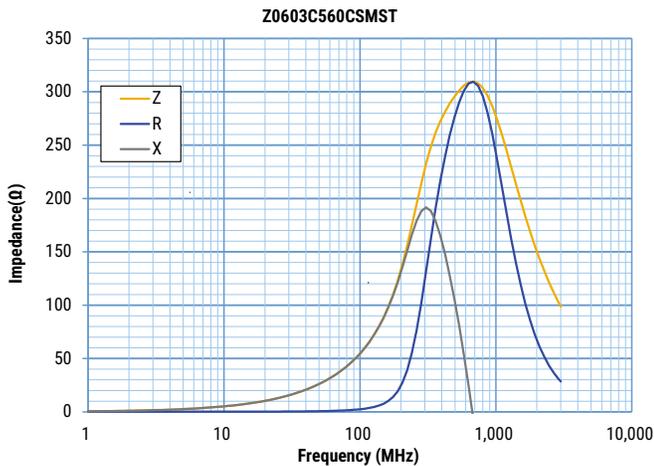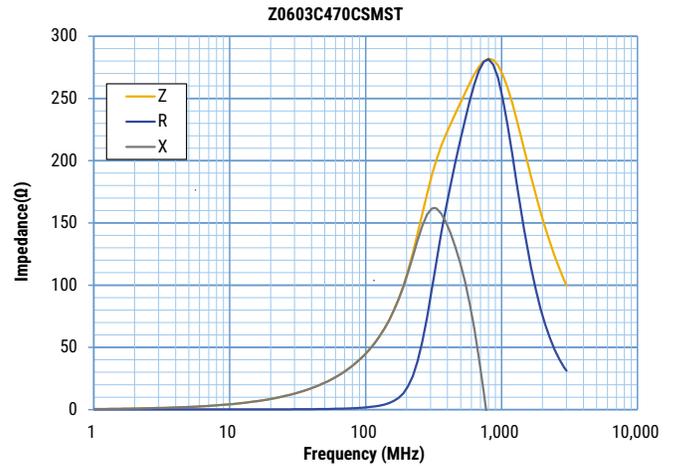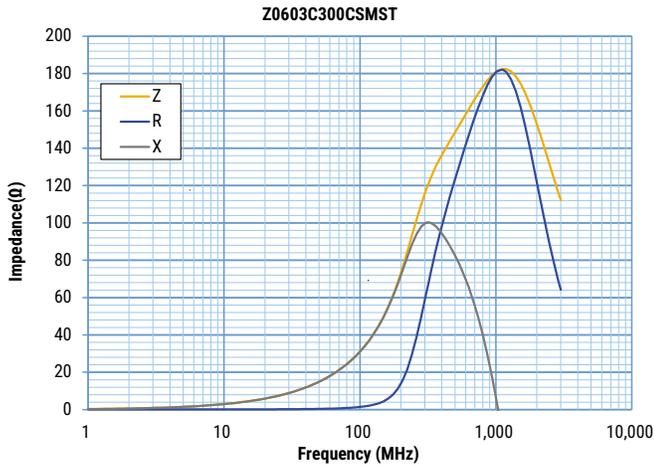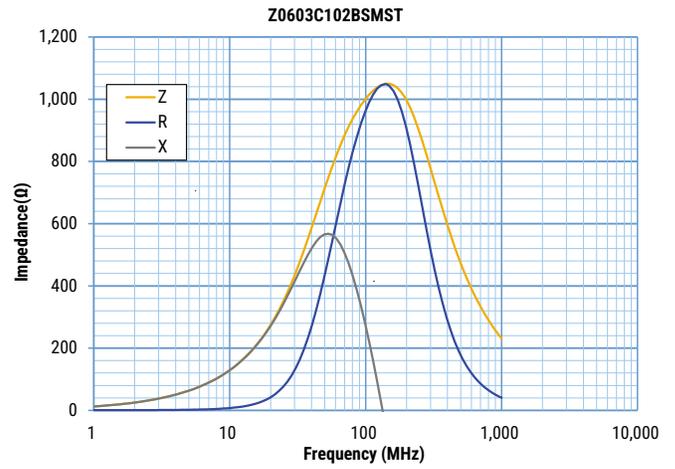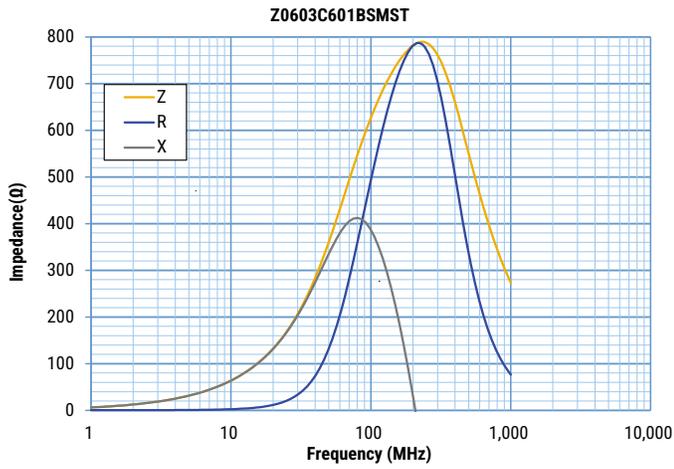







Frequency Characteristics cont.

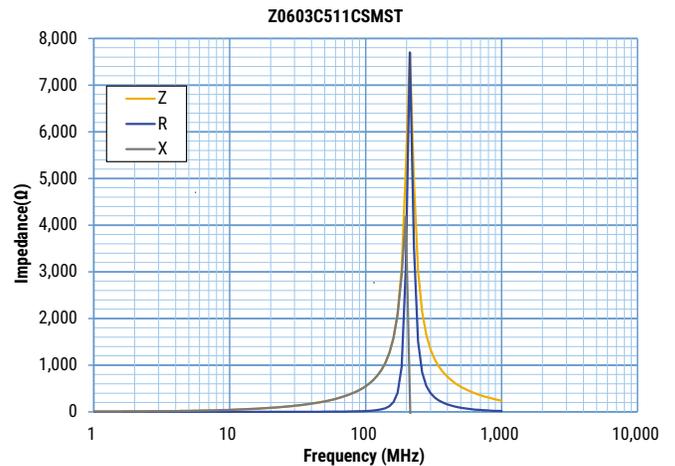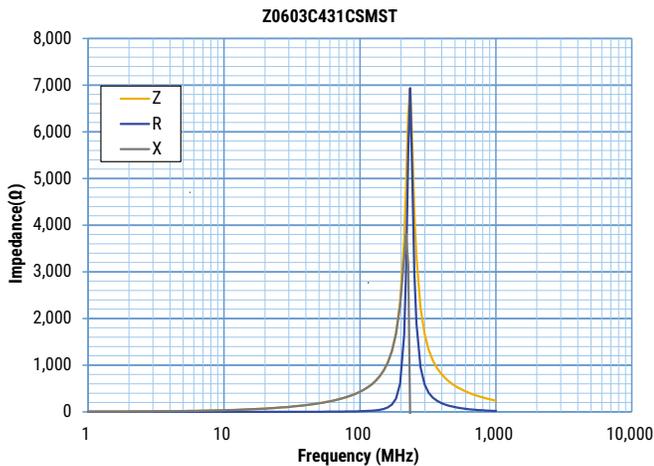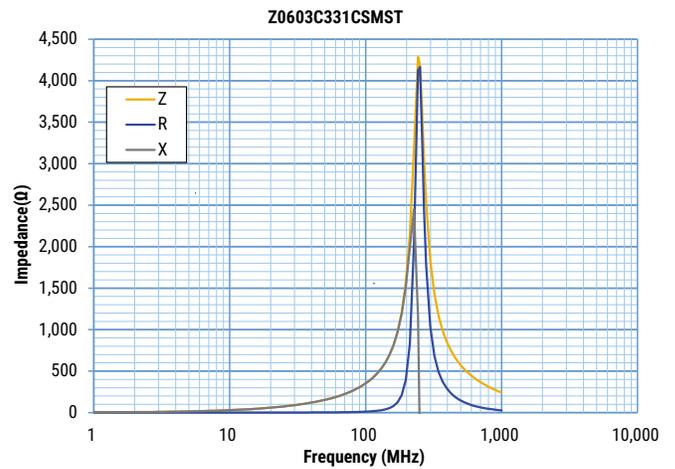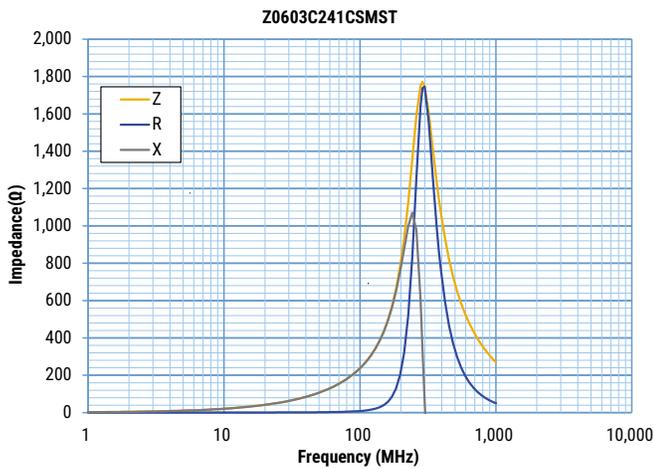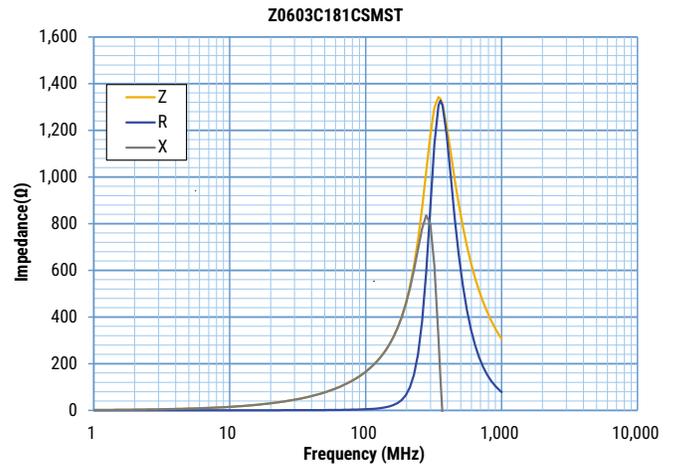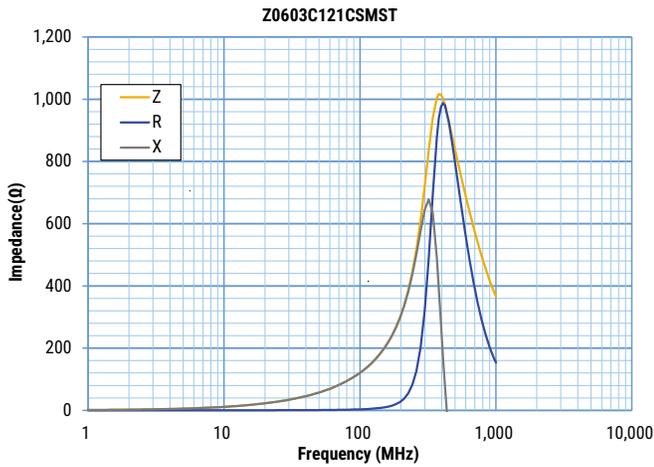







Frequency Characteristics cont.

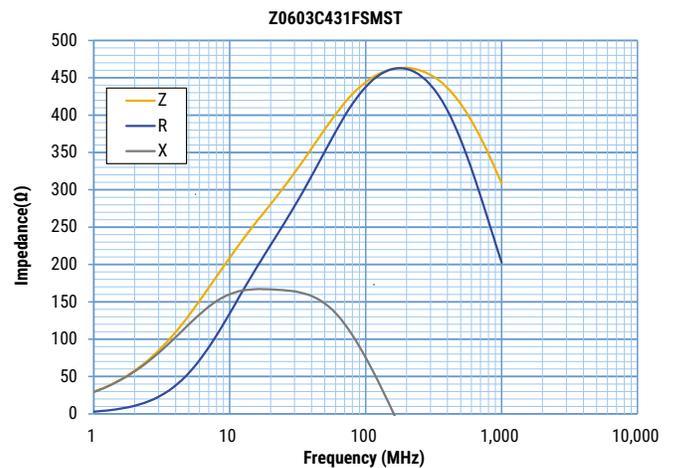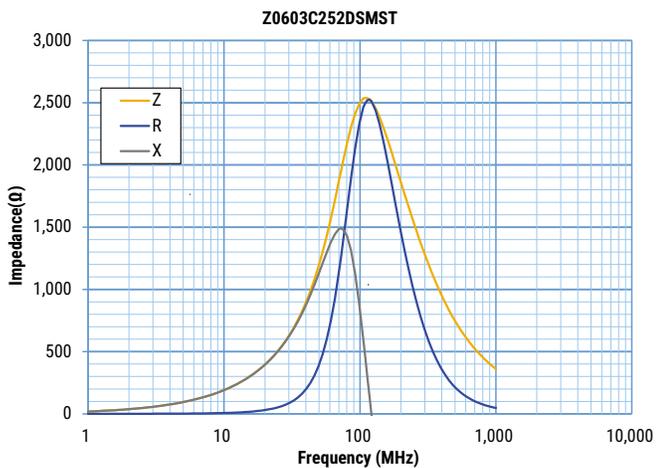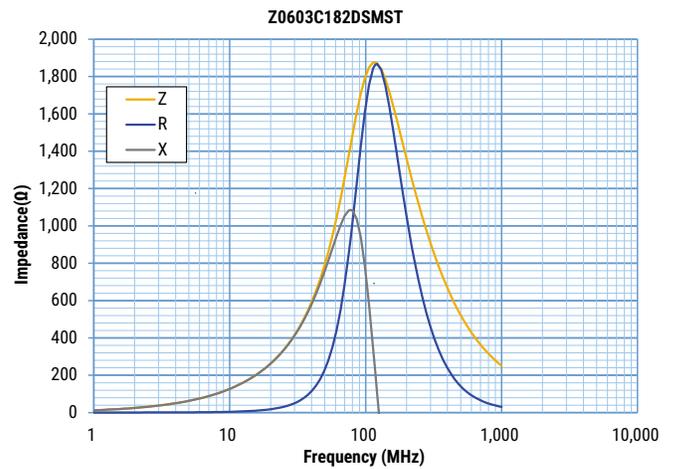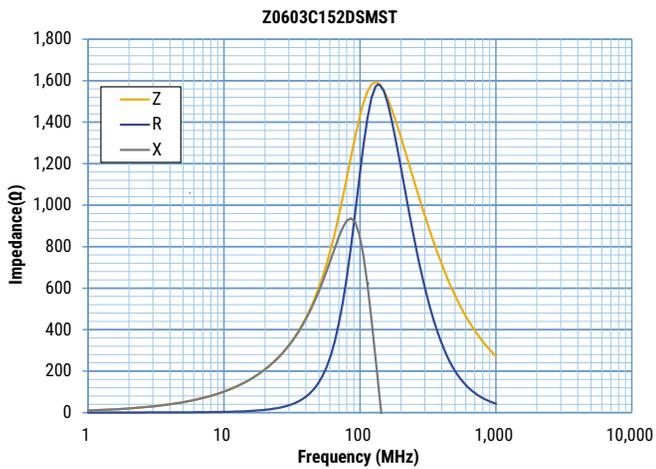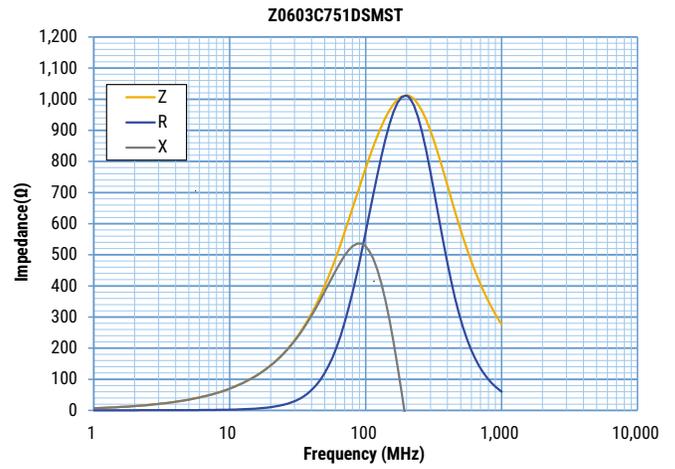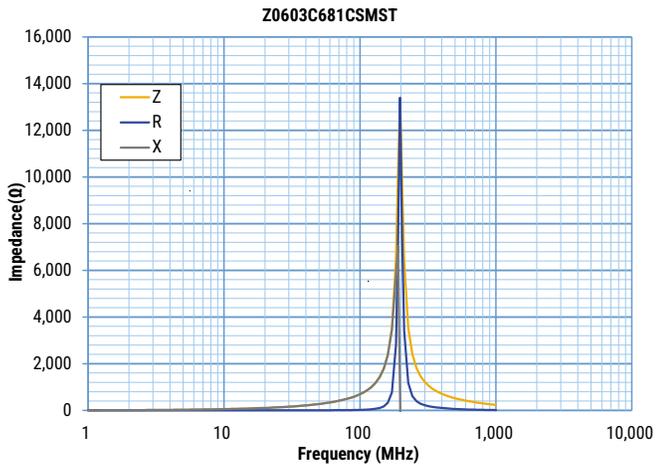







Frequency Characteristics cont.

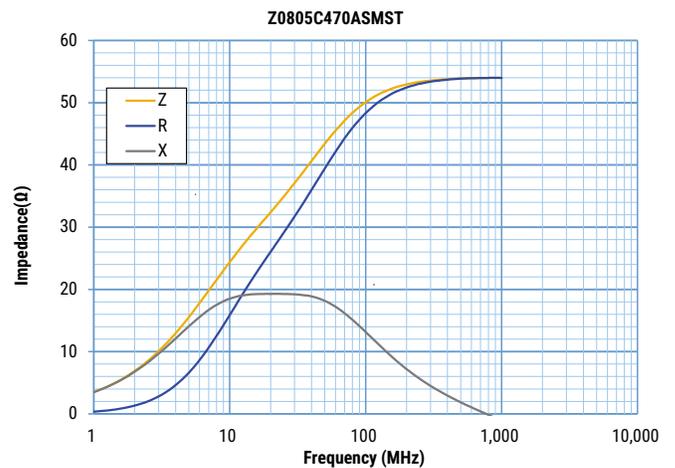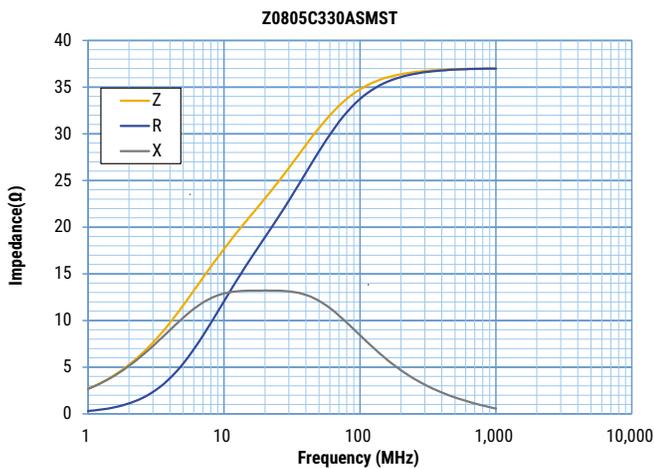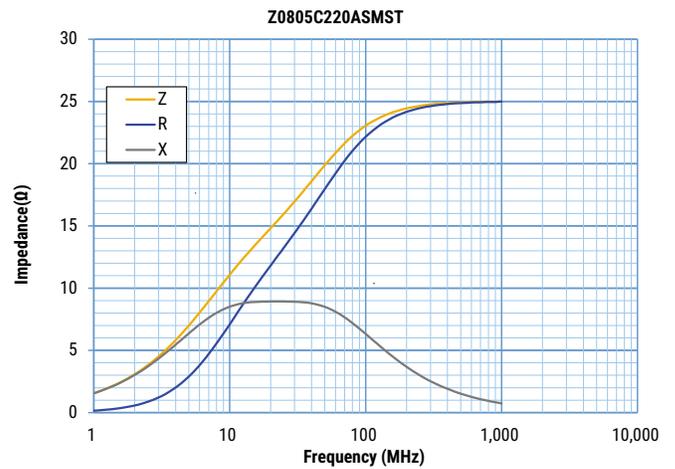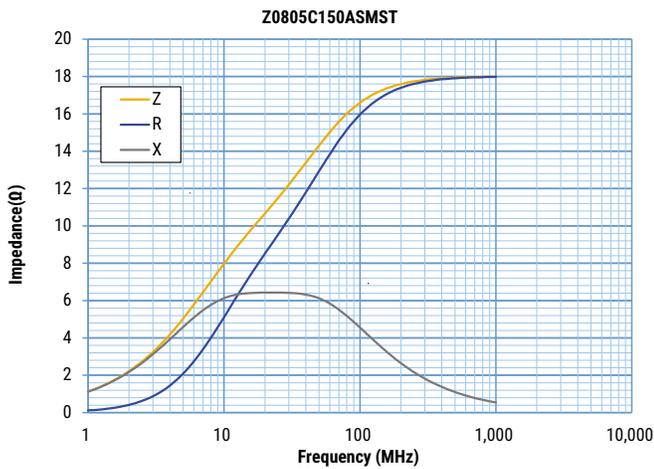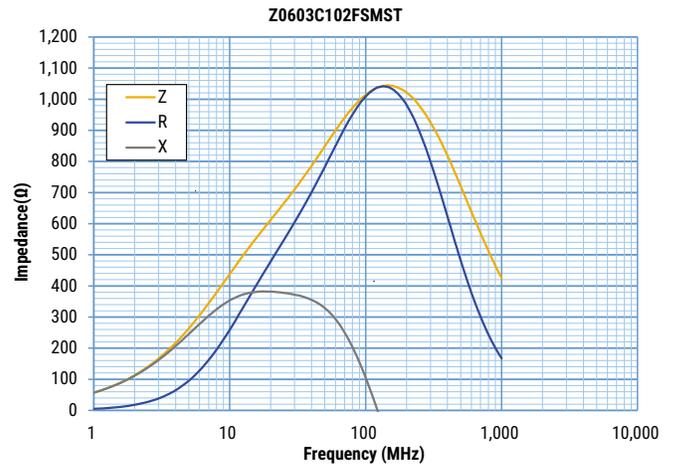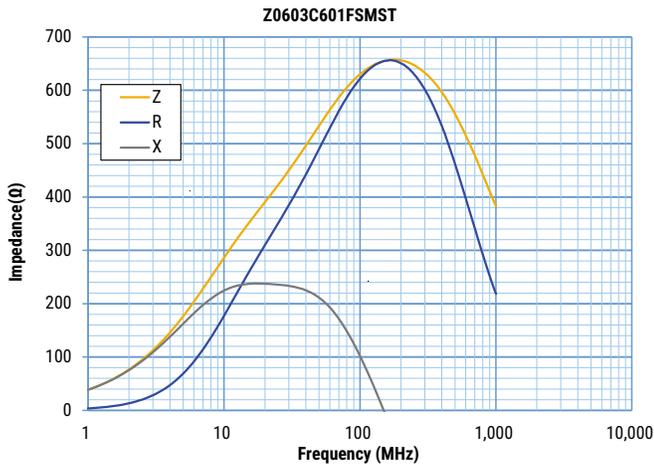







Frequency Characteristics cont.

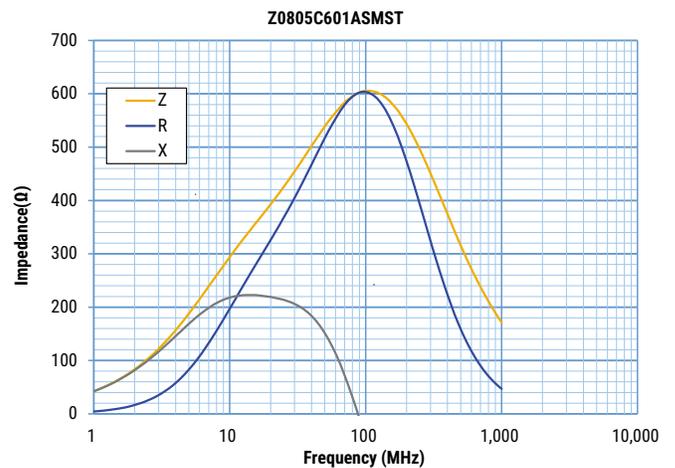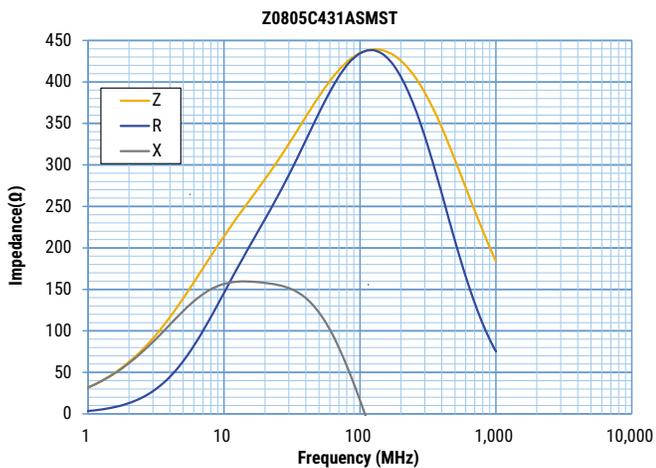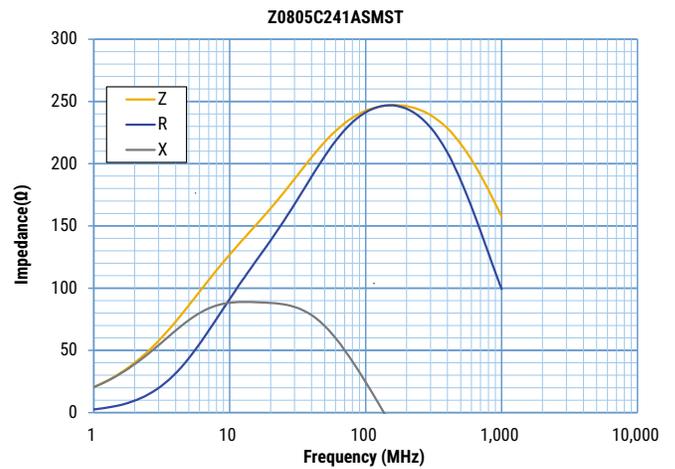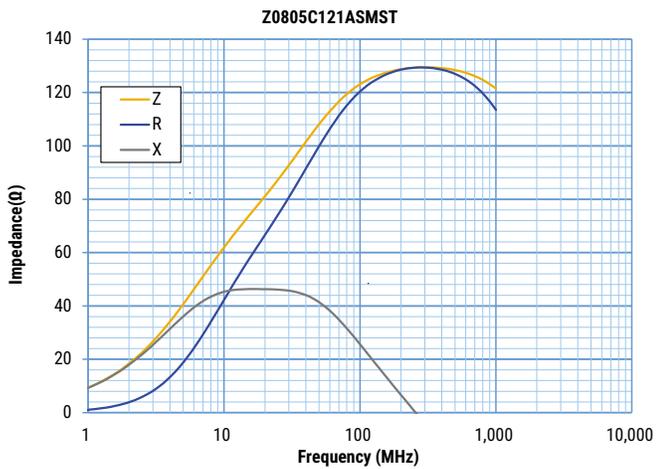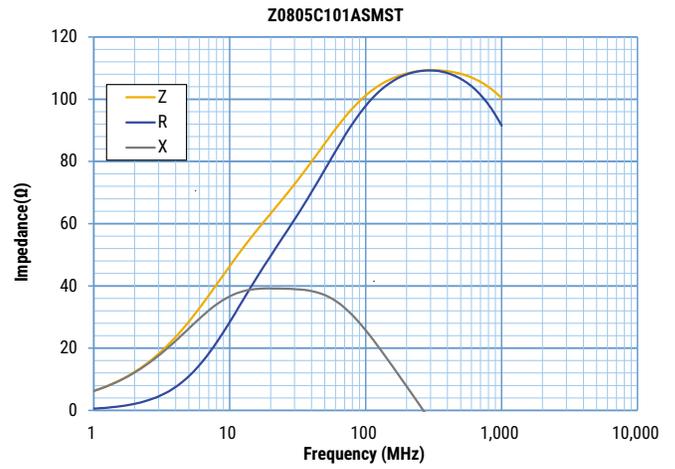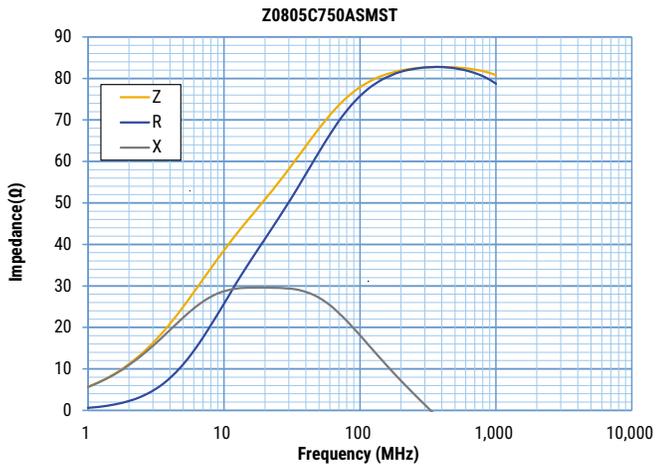


Frequency Characteristics cont.

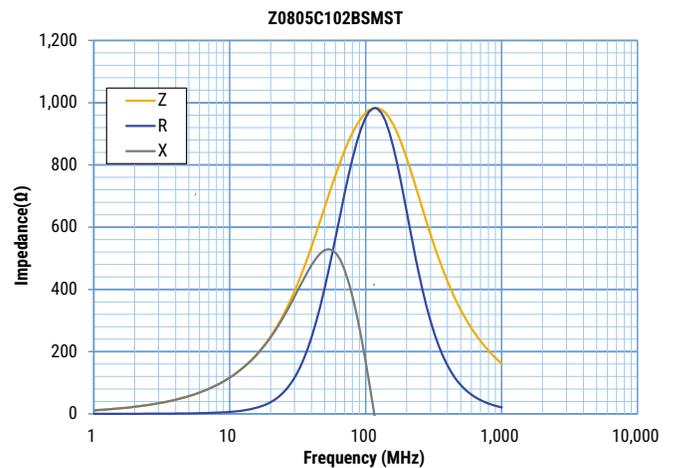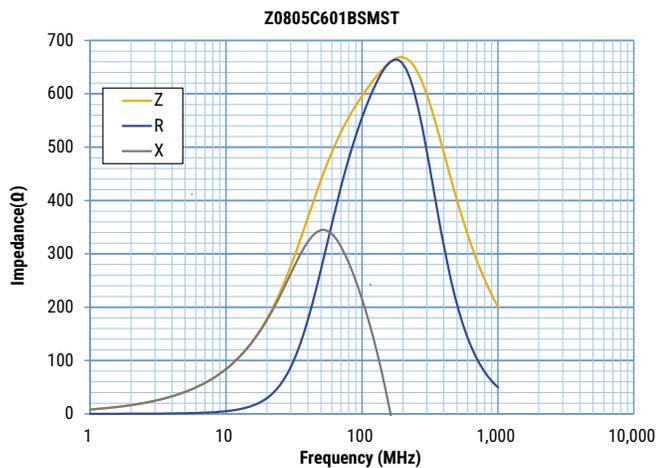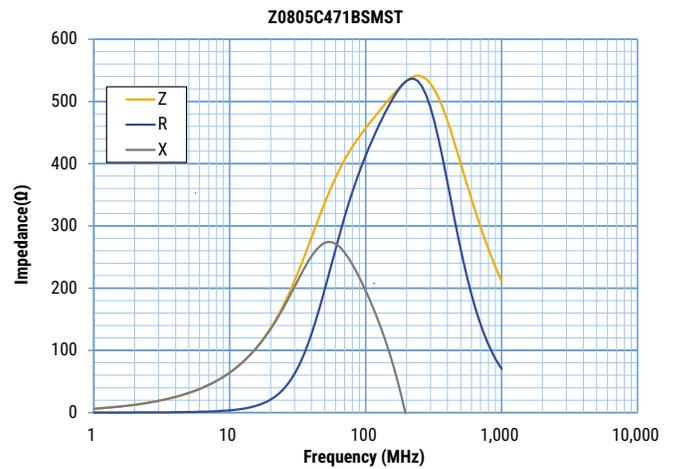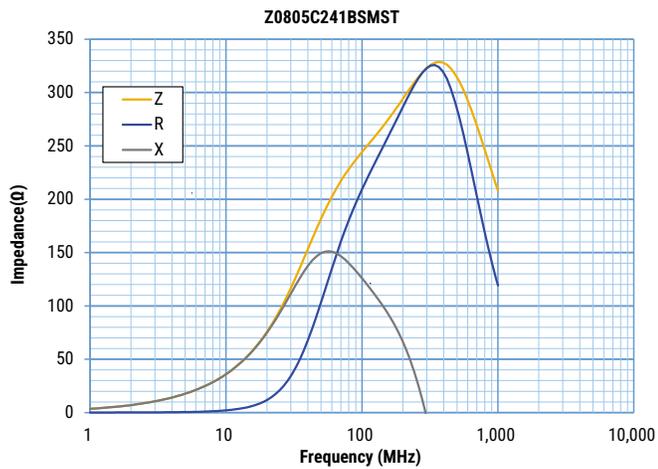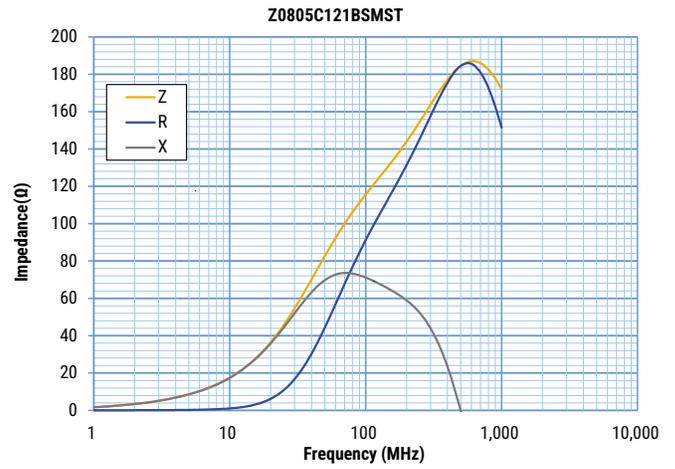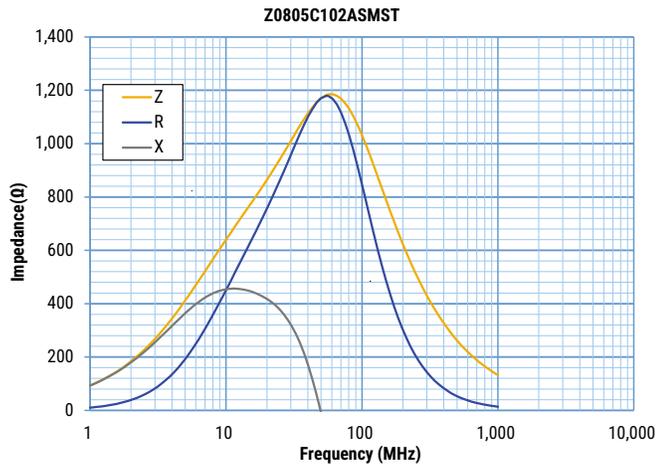

Frequency Characteristics cont.

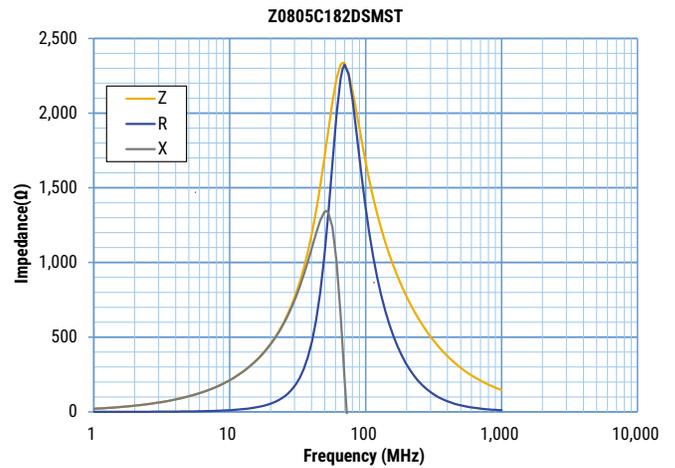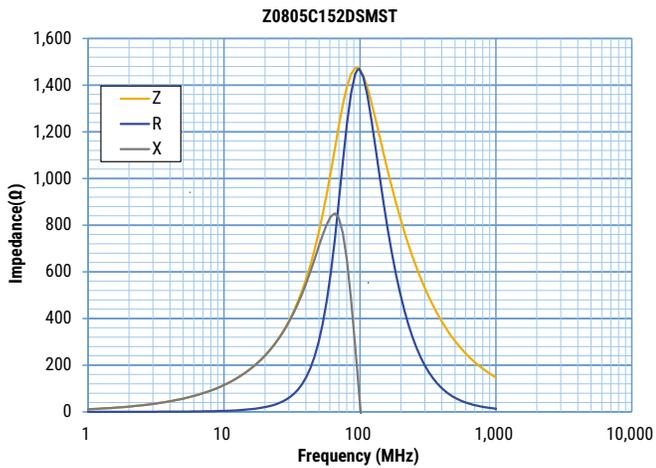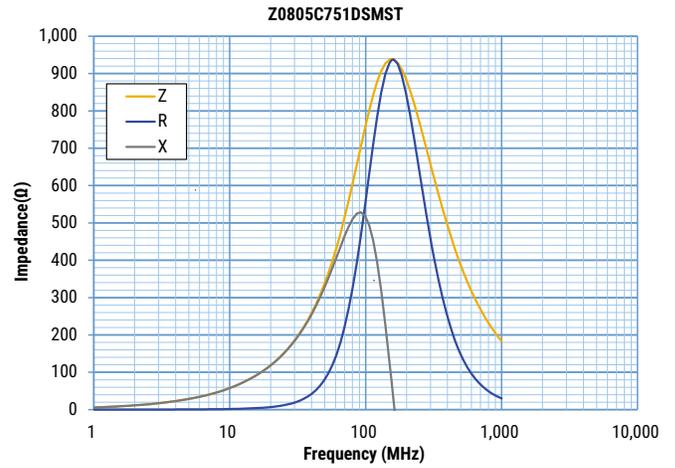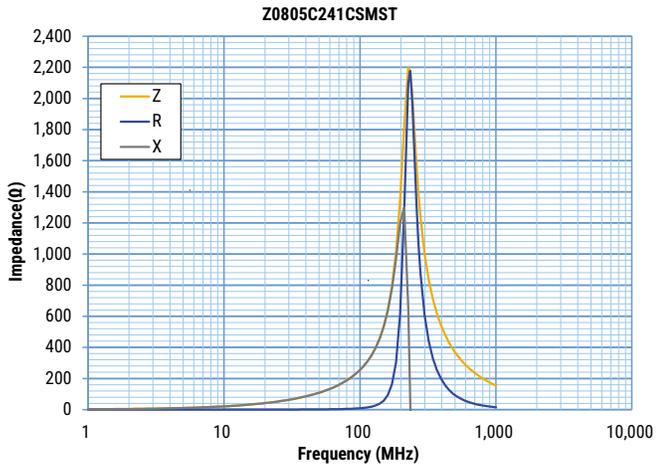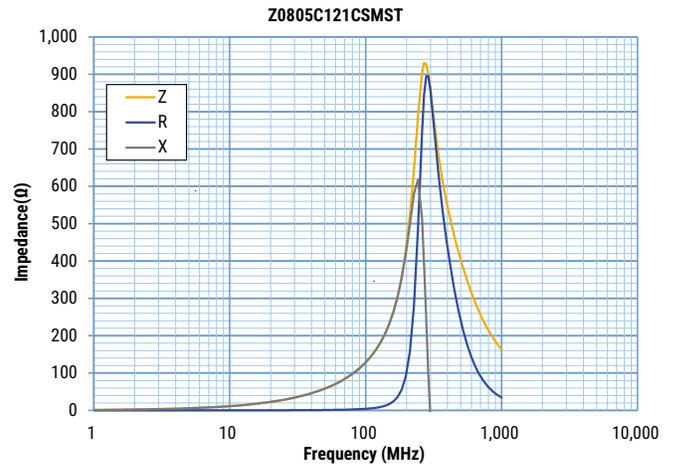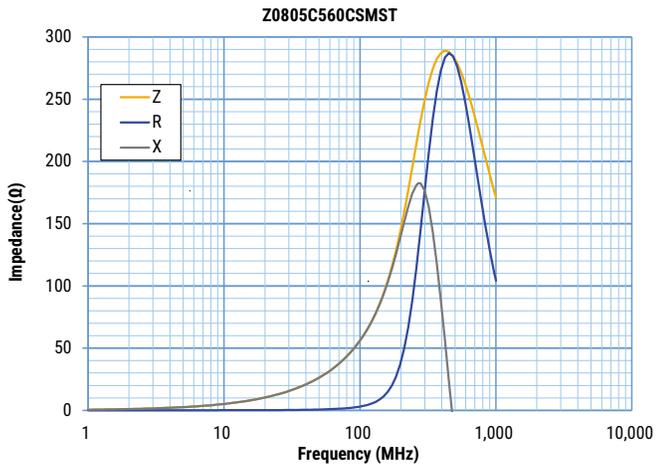


Frequency Characteristics cont.

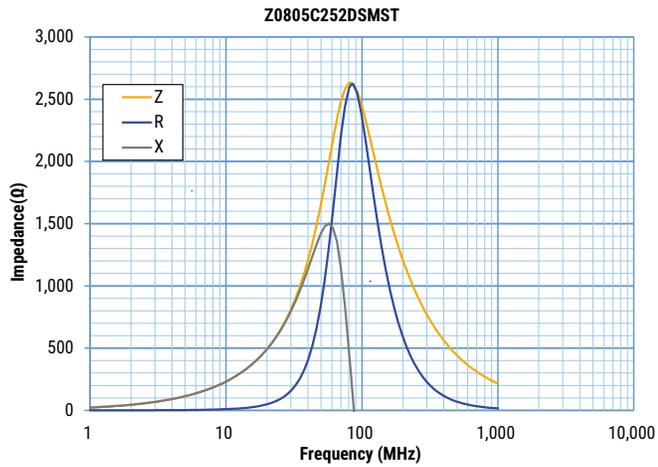

Taping Specifications - Millimeters (Inches)


Paper Tape 8mm Width

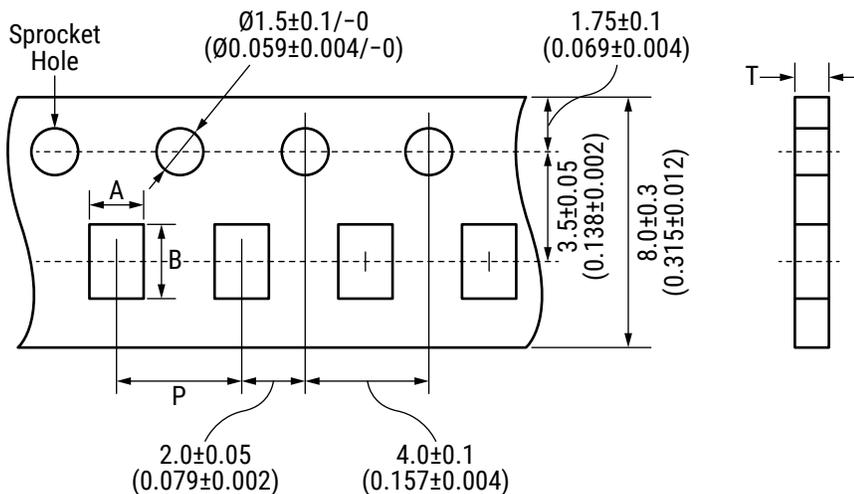

| EIA Case Size | Metric Case Size | Height | Reel Quantity | | Cavity | | Pitch | Thickness |
|---------------|------------------|--------|---------------|-----------|--------|-------|-------|-----------|
| | | | | | A | B | P | T |
| 0201 | 0603 | 0.30 | 15,000 | Nominal | 0.4 | 0.7 | 2.0 | 0.45 |
| | | | | Tolerance | ±0.06 | ±0.06 | ±0.05 | Maximum |
| 0402 | 1005 | 0.50 | 10,000 | Nominal | 0.65 | 1.15 | 2.0 | 0.8 |
| | | | | Tolerance | ±0.1 | ±0.1 | ±0.05 | Maximum |
| 0603 | 1608 | 0.80 | 4,000 | Nominal | 1.0 | 1.8 | 4.0 | 1.1 |
| | | | | Tolerance | ±0.2 | ±0.2 | ±0.1 | Maximum |
| 0805 | 2012 | 0.85 | 4,000 | Nominal | 1.5 | 2.3 | 4.0 | 1.1 |
| | | | | Tolerance | ±0.2 | ±0.2 | ±0.1 | Maximum |


Taping Specifications - Millimeters (Inches) cont.

0805 1.25 mm Height Embossed (Plastic) Tape 8 mm Width

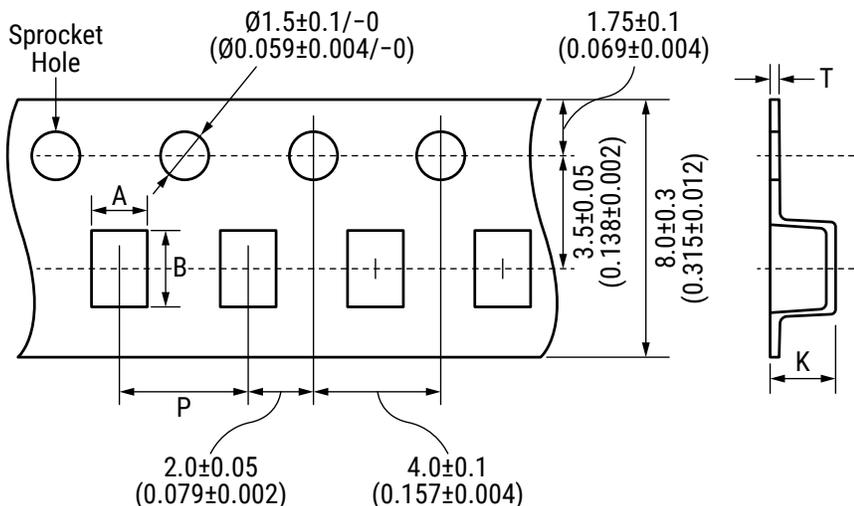


| EIA Case Size | Metric Case Size | Height | Reel Quantity | | Cavity | | Pitch | Thickness | |
|---------------|------------------|--------|---------------|-----------|--------|------|-------|-----------|---------|
| | | | | | A | B | P | T | K |
| 0805 | 2012 | 1.25 | 2,000 | Nominal | 1.5 | 2.3 | 4.0 | 0.3 | 2.0 |
| | | | | Tolerance | ±0.2 | ±0.2 | ±0.1 | Maximum | Maximum |

Reel Specifications - Millimeters

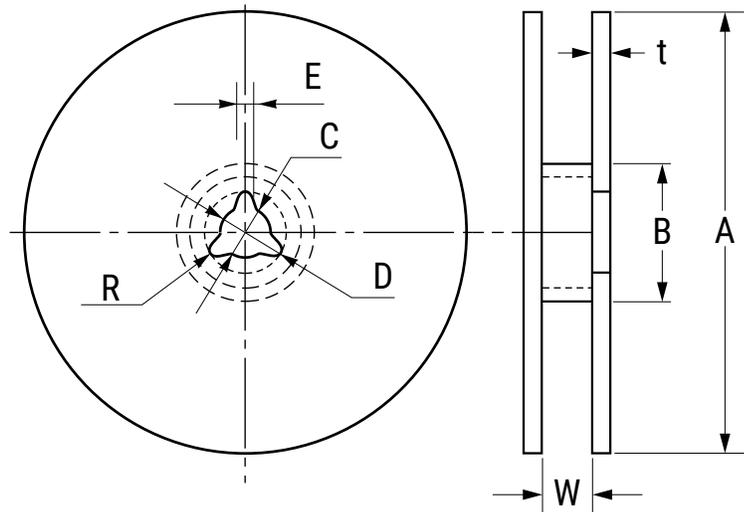

| EIA Size Code | | Dimensions - Millimeters | | | | | | | |
|---------------|-----------|--------------------------|---------|-------|-------|------|-----|---------|------|
| | | A | B | C | D | E | R | t | W |
| 0402 | Nominal | ø178.0 | ø60.0 | ø13.0 | ø21.0 | 2.0 | 1.0 | 2.5 | 10.0 |
| 0630 0805 | Tolerance | ±2.0 | Minimum | ±0.2 | ±0.8 | ±0.5 | | Maximum | ±1.5 |

Recommended Reflow Soldering Profile

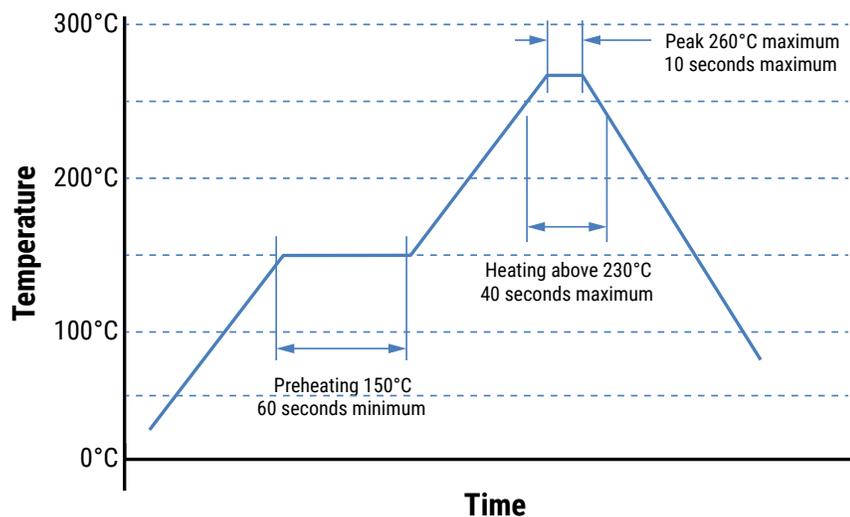

Handling Precautions

Ferrite chip beads should be stored in normal working environments. While these beads themselves are quite robust in other environments, exposure to high temperatures, high humidity, corrosive atmospheres, and long-term storage degrades solderability.

KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Atmospheres should be free of chlorine-bearing and sulfur-bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts.

For optimized solderability, ferrite chip beads stock should be used promptly, preferably within six months of receipt.”

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

When providing KEMET products and technologies contained herein to other countries, the customer must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the International Traffic in Arms Regulations (ITAR), the US Export Administration Regulations (EAR) and the Japan Foreign Exchange and Foreign Trade Act.

KEMET is a registered trademark of KEMET Electronics Corporation.