

**OBSOLETE - PART DISCONTINUED**

## Description

The AZV358 is dual low-voltage (2.7V to 5.5V) operational amplifiers which have rail-to-rail output swing capability. The input common-mode voltage range includes ground. The chip exhibits excellent speed-power ratio, achieving 1MHz of bandwidth and 1V/μs of slew rate with low supply current.

The AZV358 is built with BiCMOS process. It has bipolar input and output stages for improved noise performance, low input offset voltage and higher output current drive.

The AZV358 is available in the packages of TSSOP-8 and MSOP-8. The small packages save space on PC boards and enable the design of small portable electronic devices. It also allows the designer to place the device closer to the signal source to reduce noise pickup and increase signal integrity.


The AZV358 is also available in standard SOIC-8 package.

## Features

(For  $V_{CC} = 5V$  and  $V_{EE} = 0V$ , typical unless otherwise noted)

- Guaranteed 2.7V to 5.5V Performance
- No Crossover Distortion
- Gain-Bandwidth Product 1MHz
- Industrial Temperature Range: -40°C to +85°C
- Low Supply Current: 210μA
- Rail-to-Rail Output Swing under 10kΩ Load:
  - $V_{OH}$  up to  $V_{CC} - 10mV$
  - $V_{OL}$  near to  $V_{EE} + 65mV$
- $V_{CM}$ : -0.1V to  $V_{CC} - 0.8V$
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](#) or your local Diodes representative.**  
<https://www.diodes.com/quality/product-definitions/>


## Pin Assignments

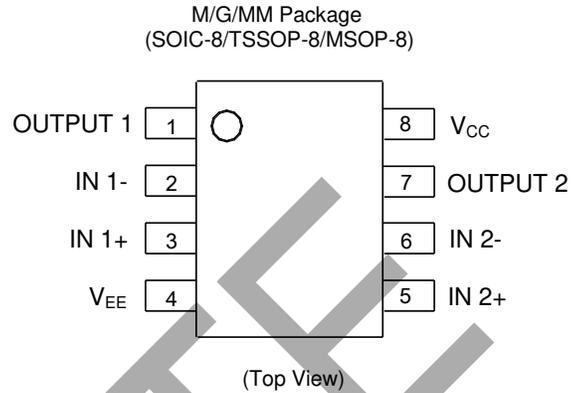

## Applications

- Active filters
- Low-power, low-voltage applications
- General-purpose portable devices
- Cellular phones, cordless phones
- Battery-powered systems

## Functional Block Diagram

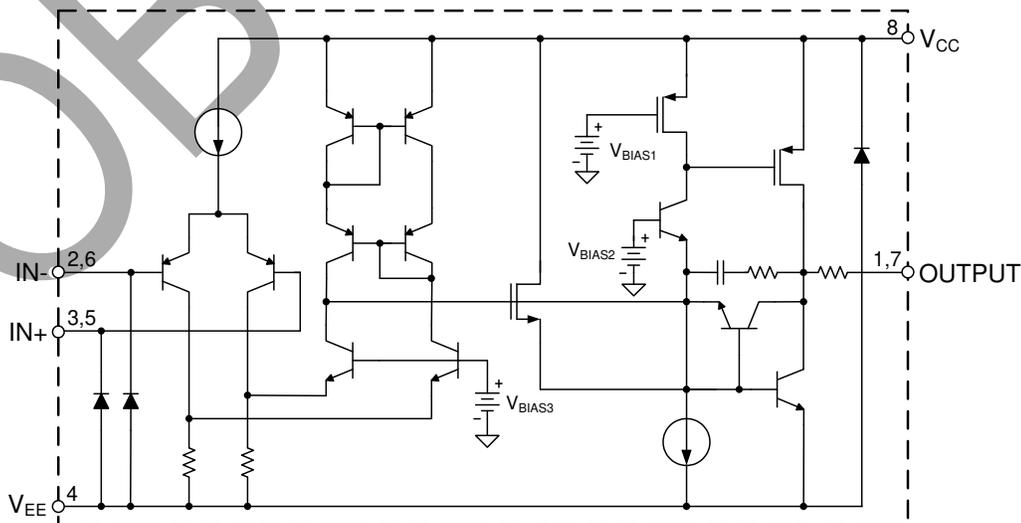

**Absolute Maximum Ratings** (@ $T_A = +25^\circ\text{C}$ , unless otherwise specified.) (Note 1)

Symbol	Parameter	Rating	Unit
$V_{CC}$	Power Supply Voltage	6	V
$T_J$	Operation Junction Temperature	150	$^\circ\text{C}$
$T_{STG}$	Storage Temperature Range	-65 to +150	$^\circ\text{C}$
$T_{LEAD}$	Lead Temperature (Soldering, 10 seconds)	+260	$^\circ\text{C}$
—	ESD (Machine Model)	200	V
—	ESD (Human Body Model)	2000	V

Note: 1. Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.

**Recommended Operating Conditions**

Symbol	Parameter	Min	Max	Unit
$V_{CC}$	Supply Voltage	2.7	5.5	V
$T_A$	Ambient Operating Temperature Range	-40	+85	$^\circ\text{C}$

**2.7V Electrical Characteristics** (@ $T_A = +25^\circ\text{C}$ , **bold** typeface applies over  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ,  $V_{CC} = 2.7\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_{CM} = 1.0\text{V}$ ,  $V_O = V_{CC}/2$  and  $R_L > 1\text{M}\Omega$ , unless otherwise specified.) (Note 2)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IO}$	Input Offset Voltage	—	—	1.7	7	mV
		—	—	—	<b>9</b>	
$I_B$	Input Bias Current	—	—	11	250	nA
		—	—	—	<b>500</b>	
$I_{IO}$	Input Offset Current	—	—	5	50	nA
		—	—	—	<b>150</b>	
$V_{CM}$	Input Common Mode Voltage Range	For $CMRR \geq 50\text{dB}$	-0.1	—	1.9	V
$I_{CC}$	Supply Current	$V_O = V_{CC}/2$ , $A_{VCL} = 1$ No load	—	140	340	$\mu\text{A}$
			—	—	<b>420</b>	
CMRR	Common Mode Rejection Ratio	$0 \leq V_{CM} \leq 1.7\text{V}$	50	63	—	dB
PSRR	Power Supply Rejection Ratio	$2.7\text{V} \leq V_{CC} \leq 5\text{V}$ $V_O = 1\text{V}$	50	60	—	dB
$I_{SOURCE}$	Output Short-Circuit Current	$V_O = 0\text{V}$	5	20	—	mA
$I_{SINK}$		$V_O = 2.7\text{V}$	10	30	—	mA
$V_{OH}$	Output Voltage Swing	$R_L = 10\text{k}\Omega$ to $1.35\text{V}$	2.60	2.69	—	V
$V_{OL}$			—	60	180	mV
GBWP	Gain Bandwidth Product	$C_L = 200\text{pF}$	—	1	—	MHz
$\phi_M$	Phase Margin	—	—	60	—	deg
$G_M$	Gain Margin	—	—	10	—	dB

Note: 2. Limits over the full temperature are guaranteed by design, but not tested in production.

**5V Electrical Characteristics** (@ $T_A = +25^\circ\text{C}$ , **bold** typeface applies over  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ,  $V_{CC} = 5\text{V}$ ,  $V_{EE} = 0\text{V}$ ,  $V_{CM} = 2.0\text{V}$ ,  $V_O = V_{CC}/2$  and  $R_L > 1\text{M}\Omega$ , unless otherwise specified.) (Note 2)


Symbol	Parameter	Conditions	Min	Typ	Max	Unit		
$V_{IO}$	Input Offset Voltage	—	—	1.7	7	mV		
		—	—	—	<b>9</b>			
$I_B$	Input Bias Current	—	—	15	250	nA		
		—	—	—	<b>500</b>			
$I_{IO}$	Input Offset Current	—	—	5	50	nA		
		—	—	—	<b>150</b>			
$V_{CM}$	Input Common Mode Voltage Range	For $CMRR \geq 50\text{dB}$	-0.1	—	4.2	V		
$I_{CC}$	Supply Current	$V_O = V_{CC}/2$ , $A_{VCL} = 1$ No load	—	210	440	$\mu\text{A}$		
			—	—	<b>615</b>			
$G_V$	Large-Signal Voltage Gain	$R_L = 2\text{k}\Omega$	84	100	—	dB		
			<b>80</b>	—	—			
CMRR	Common Mode Rejection Ratio	$0 \leq V_{CM} \leq 4\text{V}$	50	63	—	dB		
PSRR	Power Supply Rejection Ratio	$2.7\text{V} \leq V_{CC} \leq 5\text{V}$ $V_O = 1\text{V}$ , $V_{CM} = 1\text{V}$	50	60	—	dB		
$I_{SOURCE}$	Output Short-Circuit Current	$V_O = 0\text{V}$	5	60	—	mA		
$I_{SINK}$		$V_O = 5\text{V}$	10	160	—	mA		
$V_{OH}$	Output Voltage Swing	$R_L = 2\text{k}\Omega$ to 2.5V	4.7	4.96	—	V		
			<b>4.6</b>	—	—			
		$R_L = 10\text{k}\Omega$ to 2.5V	4.9	4.99	—			
<b>4.8</b>			—	—				
$V_{OL}$			$R_L = 2\text{k}\Omega$ to 2.5V	—	120		300	mV
				—	—		<b>400</b>	
	$R_L = 10\text{k}\Omega$ to 2.5V		—	65	180			
			—	—	<b>280</b>			
SR	Slew Rate	—	1	—	V/ $\mu\text{s}$			
GBWP	Gain Bandwidth Product	$C_L = 200\text{pF}$	—	1	—	MHz		
$\phi_M$	Phase Margin	—	—	60	—	deg		
GM	Gain Margin	—	—	10	—	dB		

Note: 2. Limits over the full temperature are guaranteed by design, but not tested in production.


**OBSOLETE – PART DISCONTINUED**

**Performance Characteristics**


**Supply Current vs. Supply Voltage**

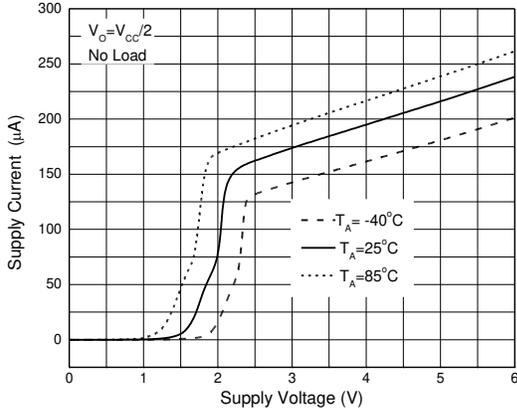


**Supply Current vs. Temperature**

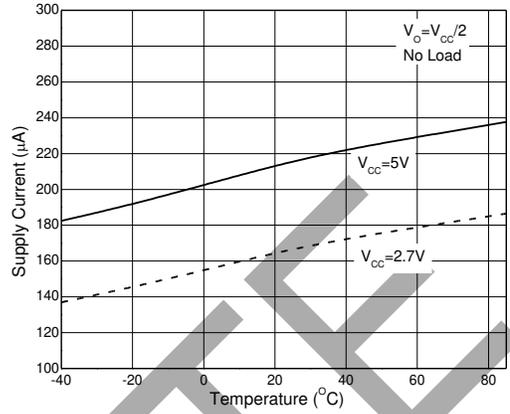


**Slew Rate vs. Supply Voltage**

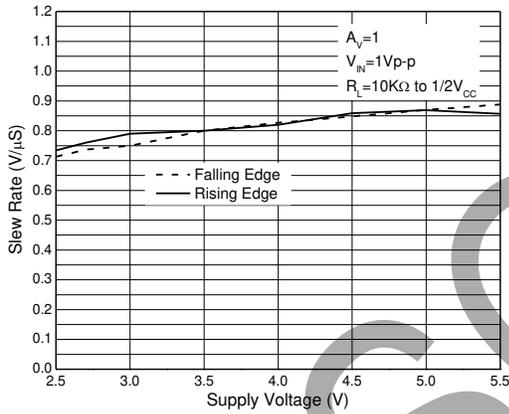


**Output Short-Circuit Current vs. Supply Voltage**

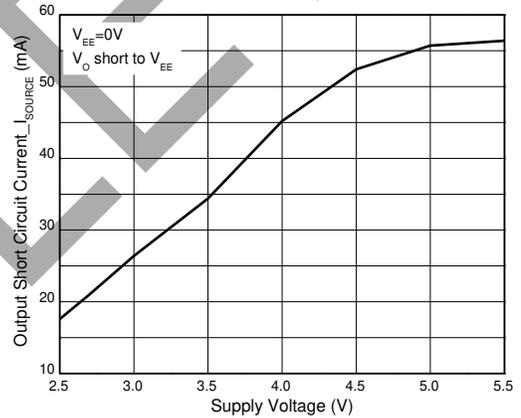

**Output Short-Circuit Current vs. Supply Voltage**

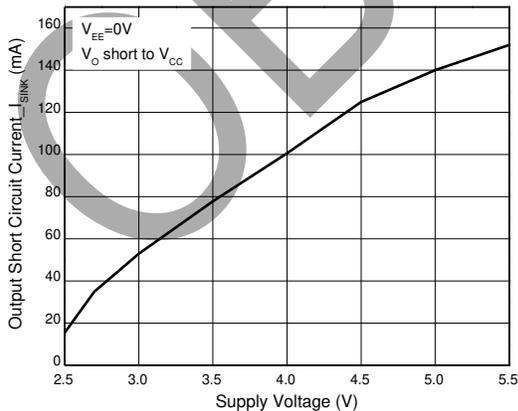


**Output Short-Circuit Current vs. Temperature**

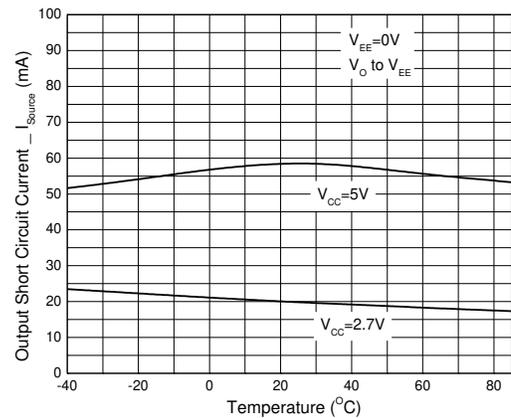


**Performance Characteristics** (continued)


**Output Short-Circuit Current vs. Temperature**

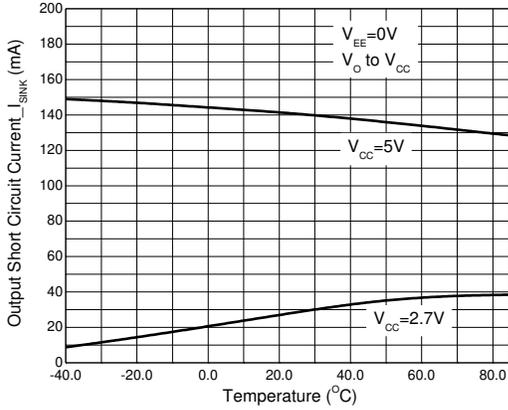


**Output Voltage vs. Output Source Current**

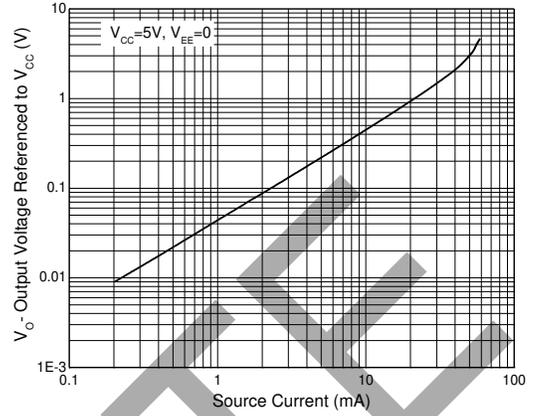


**Output Voltage vs. Output Source Current**

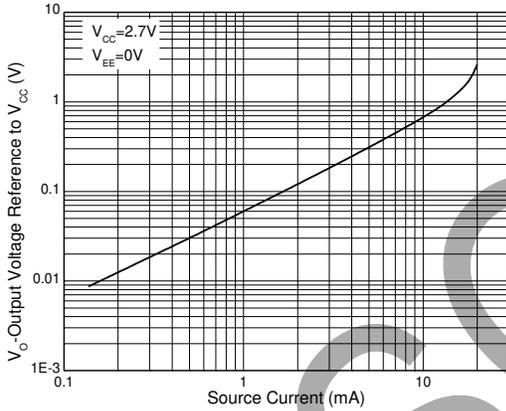


**Output Voltage vs. Output Sink Current**

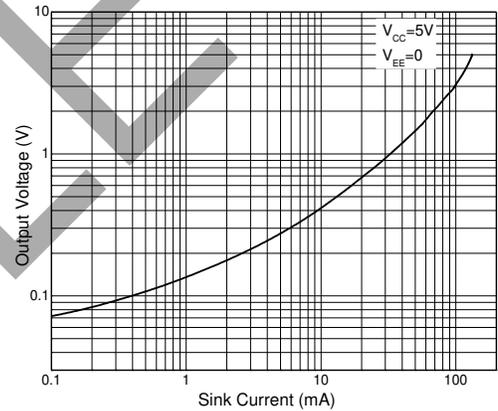

**Output Voltage vs. Output Sink Current**

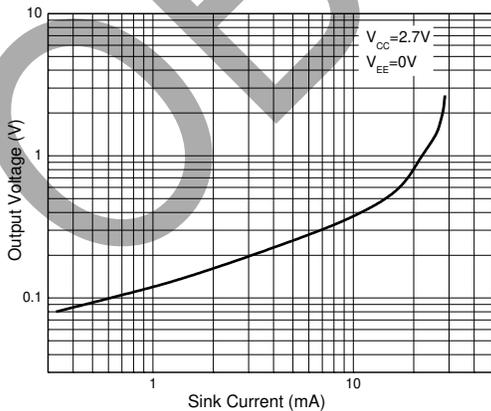


**Output Voltage Swing vs. Supply Voltage**

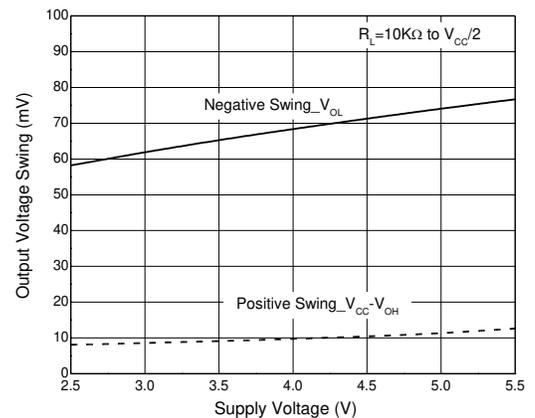


**Performance Characteristics** (continued)


**Output Voltage Swing vs. Temperature**

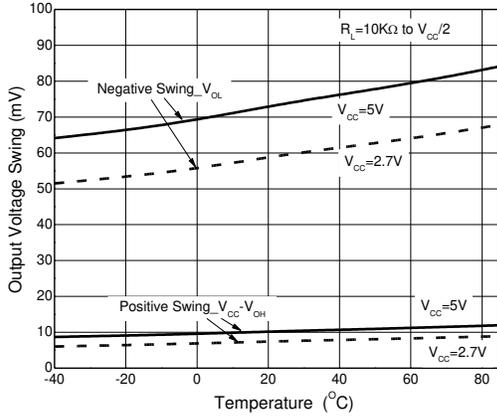


**Gain and Phase vs. Frequency and Resistive Load**

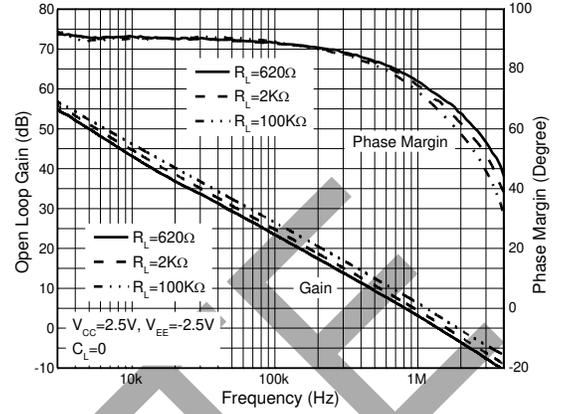


**Gain and Phase vs. Frequency and Capacitive Load**

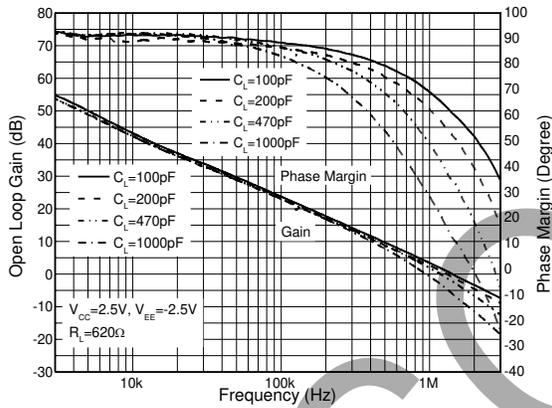


**Gain and Phase vs. Frequency and Capacitive Load**

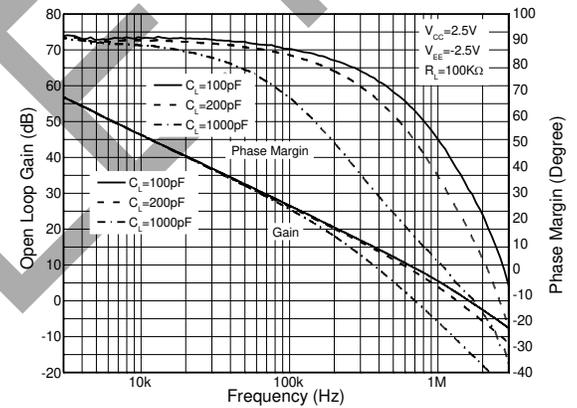

**THD+N vs. Frequency**

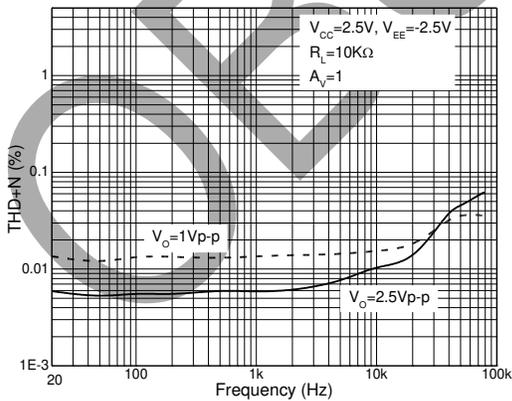


**Non-Inverting Input Small-Signal Pulse Response**

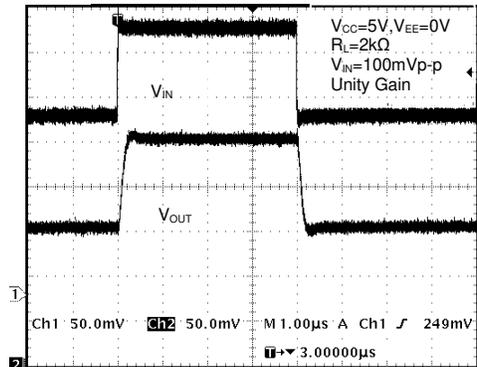


**Performance Characteristics** (continued)


**Non-Inverting Input Large Signal Pulse Response**

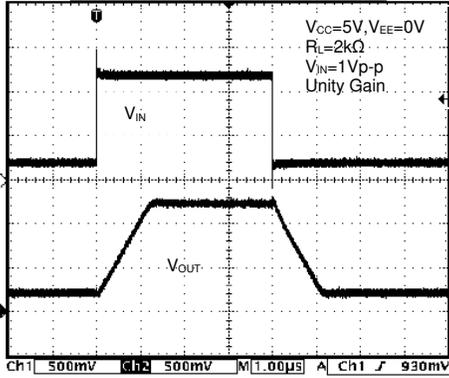

**Non-Inverting Input Small-Signal Response**

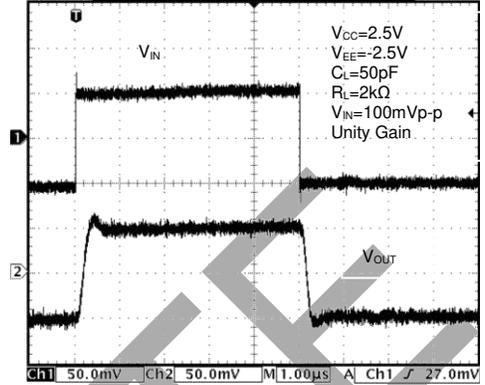


**Non-Inverting Input Small-Signal Response**

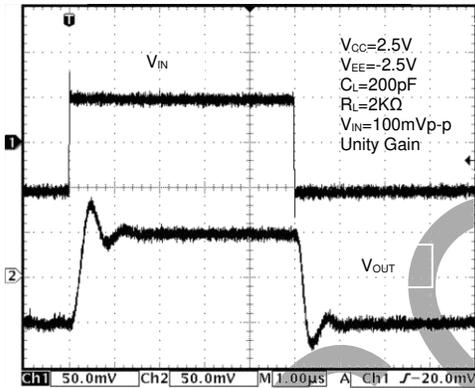

OBSOLETE - PART DISCONTINUED

OBSOLETE

**Ordering Information**

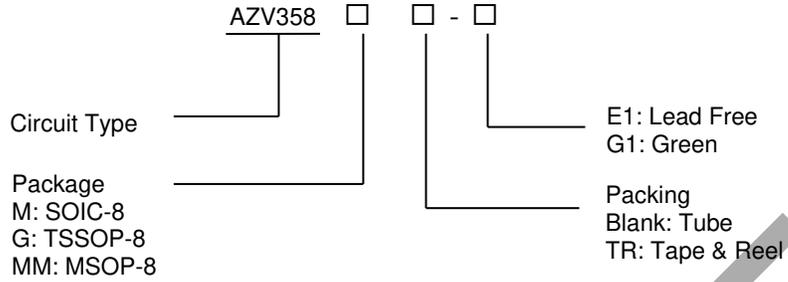

Package	Temperature Range	Orderable Part Number		Marking ID		Packing
		Lead Free	Green	Lead Free	Green	
SOIC-8	-40 to +85°C	AZV358M-E1	AZV358M-G1	AZV358M-E1	AZV358M-G1	Tube
		AZV358MTR-E1	AZV358MTR-G1	AZV358M-E1	AZV358M-G1	Tape & Reel
TSSOP-8	-40 to +85°C	AZV358G-E1	AZV358G-G1	EG3E	GG3E	Tube
		AZV358GTR-E1	AZV358GTR-G1	EG3E	GG3E	Tape & Reel
MSOP-8	-40 to +85°C	AZV358MM-E1	AZV358MM-G1	AZV358MM-E1	AZV358MM-G1	Tube
		AZV358MMTR-E1	AZV358MMTR-G1	AZV358MM-E1	AZV358MM-G1	Tape & Reel

Note: 3. Diodes Incorporated's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant. Products with "G1" suffix are available in green packages.


OBSOLETE

OBSOLETE - PART DISCONTINUED

**Package Outline Dimensions** (All dimensions in mm(inch).)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SOIC-8**

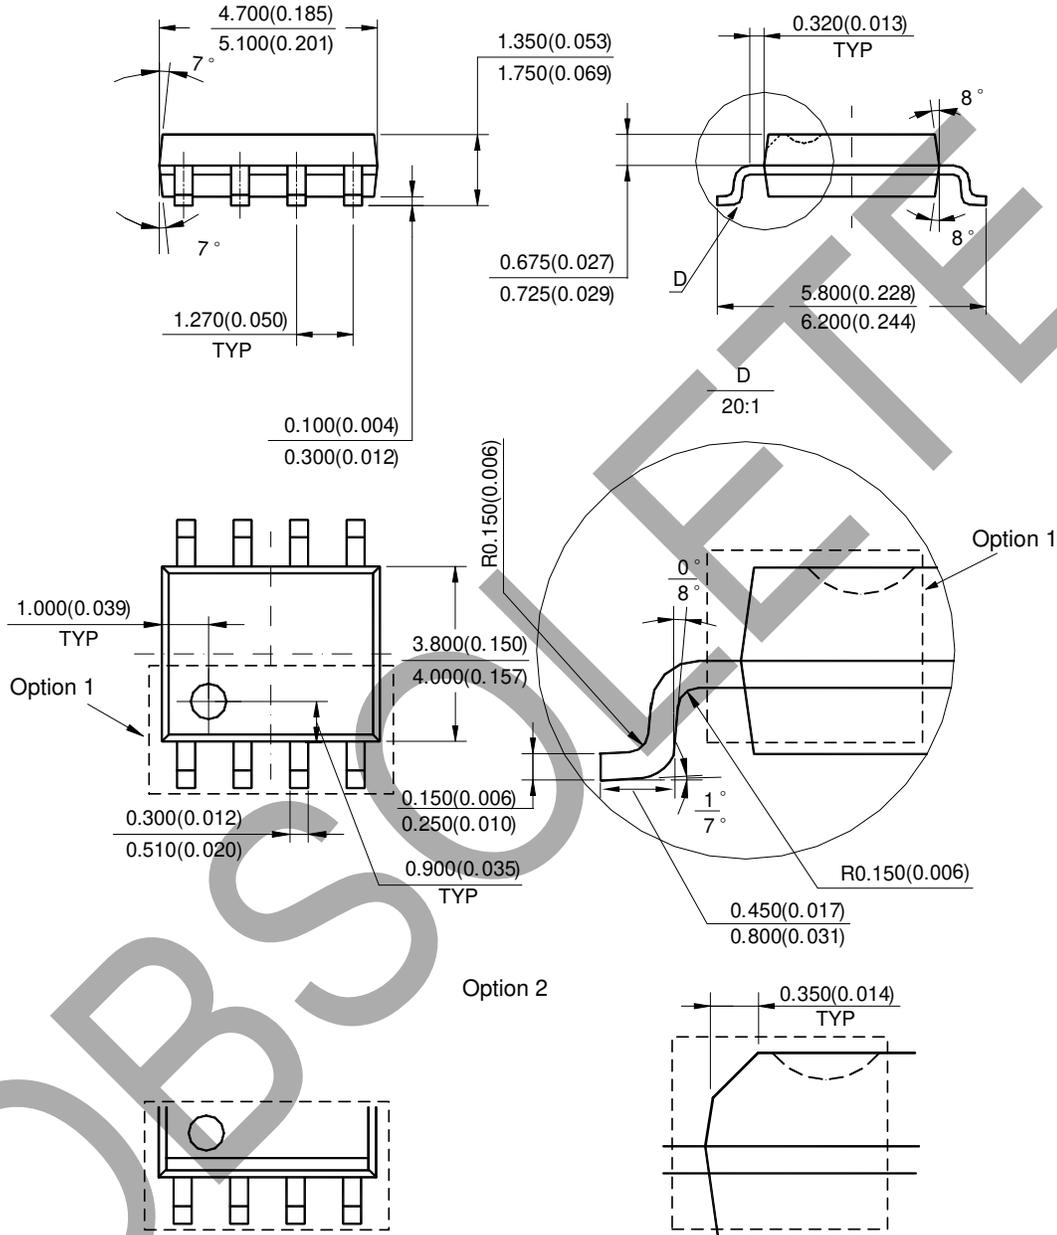


OBSOLETE - PART DISCONTINUED

**Package Outline Dimensions** (continued) (All dimensions in mm(inch).)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**TSSOP-8**

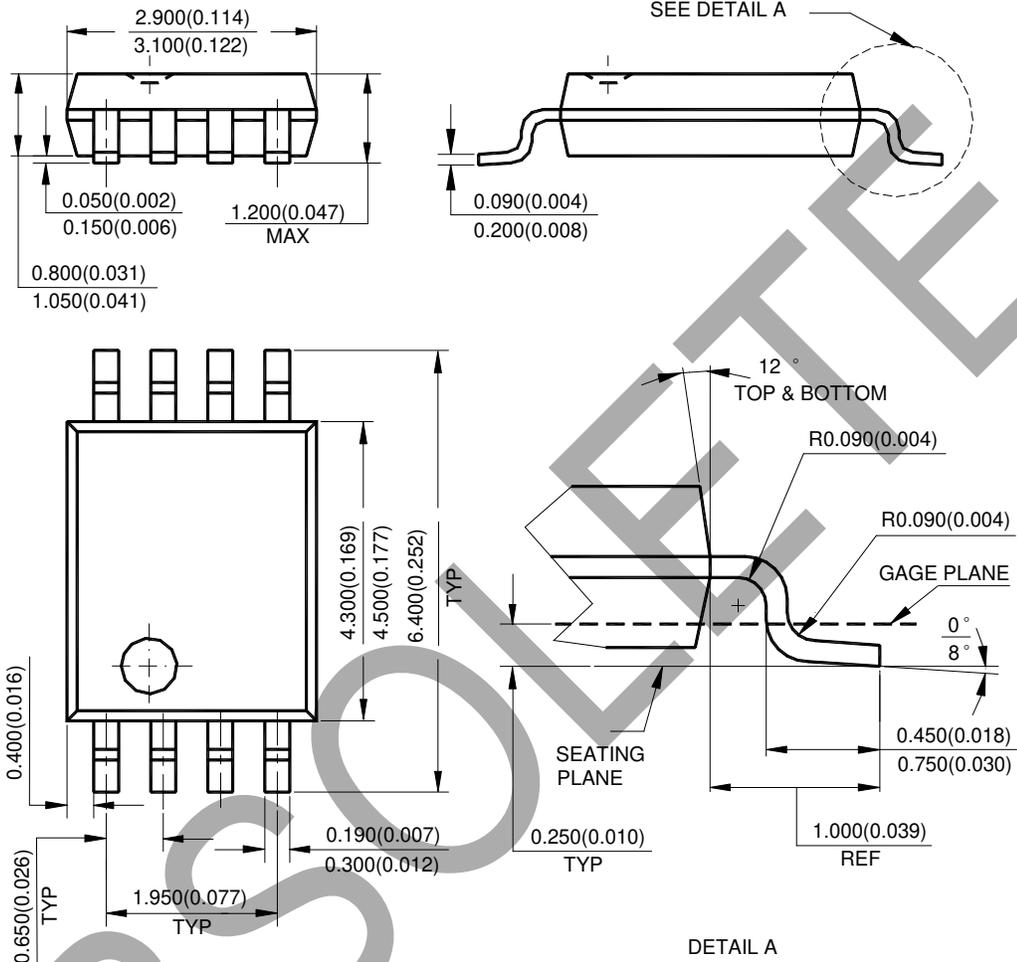


Note: Eject hole, oriented hole and mold mark is optional.

OBSOLETE - PART DISCONTINUED

**Package Outline Dimensions** (continued) (All dimensions in mm(inch).)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**MSOP-8**

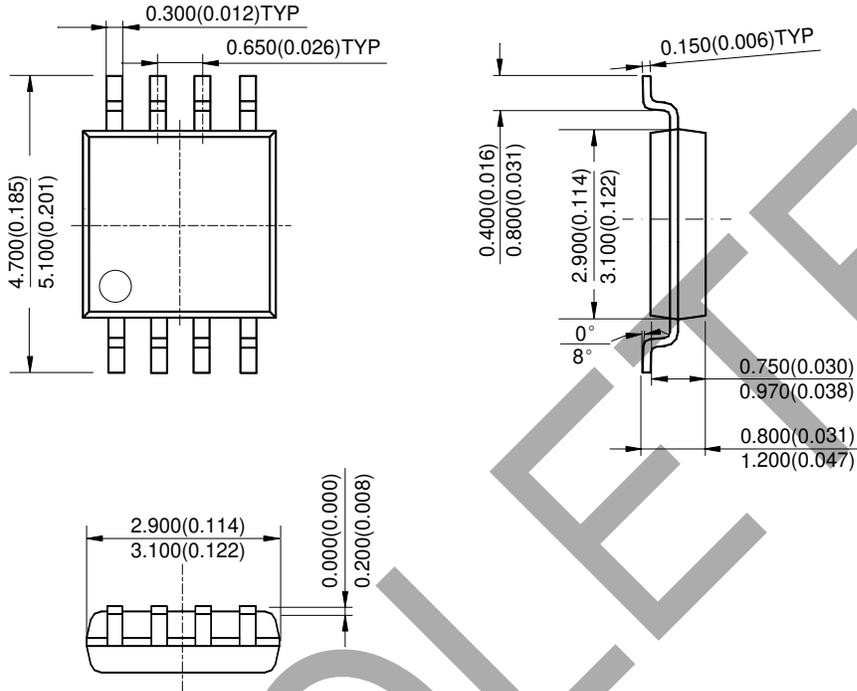

Note: Eject hole, oriented hole and mold mark is optional.


OBSOLETE - PART DISCONTINUED

OBSOLETE

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SOIC-8

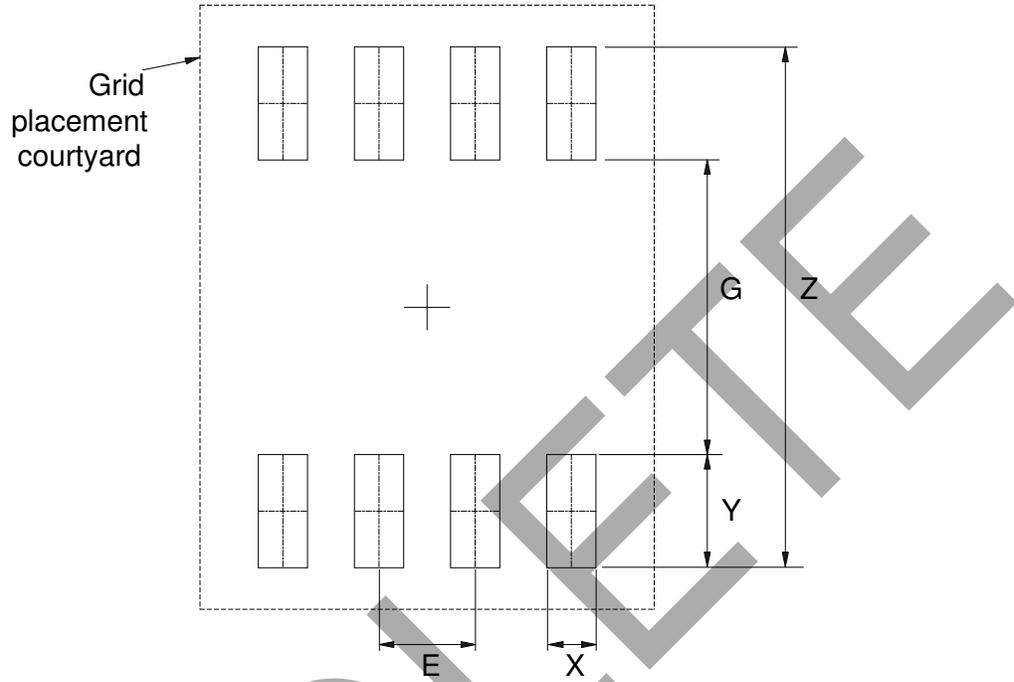

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	1.270/0.050


OBSOLETE - PART DISCONTINUED

OBSOLETE

**Suggested Pad Layout** (continued)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

TSSOP-8

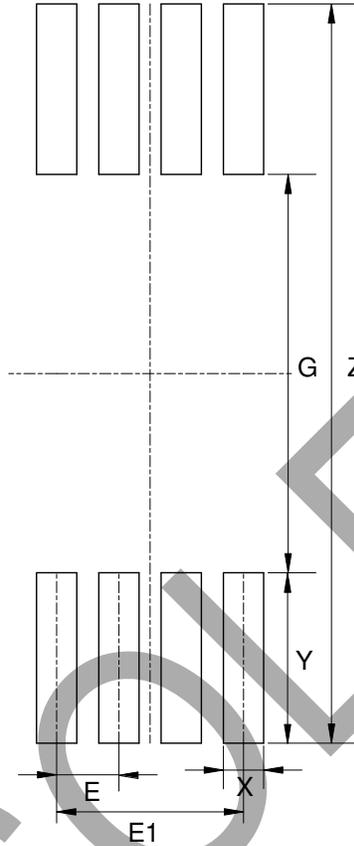


Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)	E1 (mm)/(inch)
Value	7.720/0.304	4.160/0.164	0.420/0.017	1.780/0.070	0.650/0.026	1.950/0.077

OBSOLETE - PART DISCONTINUED

**Suggested Pad Layout** (continued)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**MSOP-8**

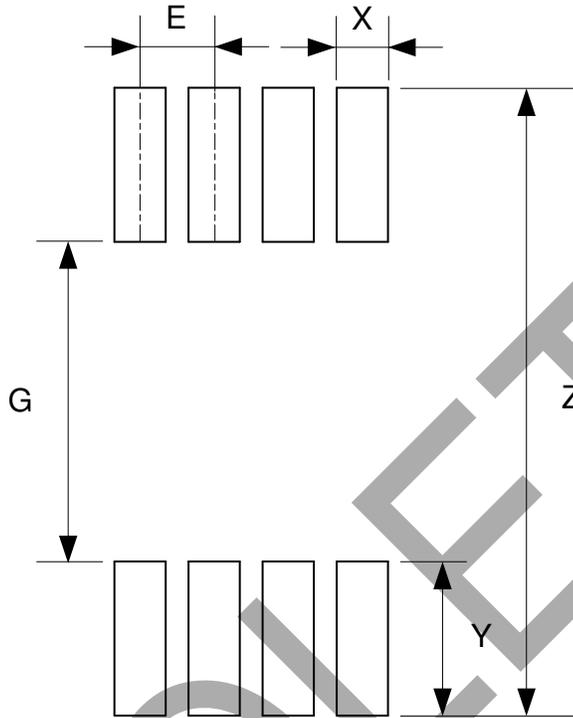

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)
Value	5.500/0.217	2.800/0.110	0.450/0.018	1.350/0.053	0.650/0.026

OBSOLETE - PART DISCONTINUED

OBSOLETE

**IMPORTANT NOTICE**

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.  
All other trademarks are the property of their respective owners.  
© 2024 Diodes Incorporated. All Rights Reserved.

[www.diodes.com](http://www.diodes.com)