

## Features

- Constant Voltage and Constant Current Control
- Supply Voltage: 3 V to 36 V
- Low Supply Current: Maximum 200  $\mu$ A
- Precision Internal Reference
  - Voltage Control Loop: 1.21 V
  - Current Control Loop: 50/70/100/150/200 mV
- Operating Temperature Range:  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$

## Description

The TPA725x is a highly integrated solution for SMPS (Switching Mode Power Supply) applications requiring voltage and current control loop.


The TPA725x series integrates two op amps with an open-drain output, a 1.21-V voltage reference, and a lower voltage reference for low-side current-sensing circuits.

The TPA725x series has a 200- $\mu$ A supply current, which can be used in low-power applications.

## Applications

- Power Module
- Adapter
- Led Lighting

## Typical Application Circuit

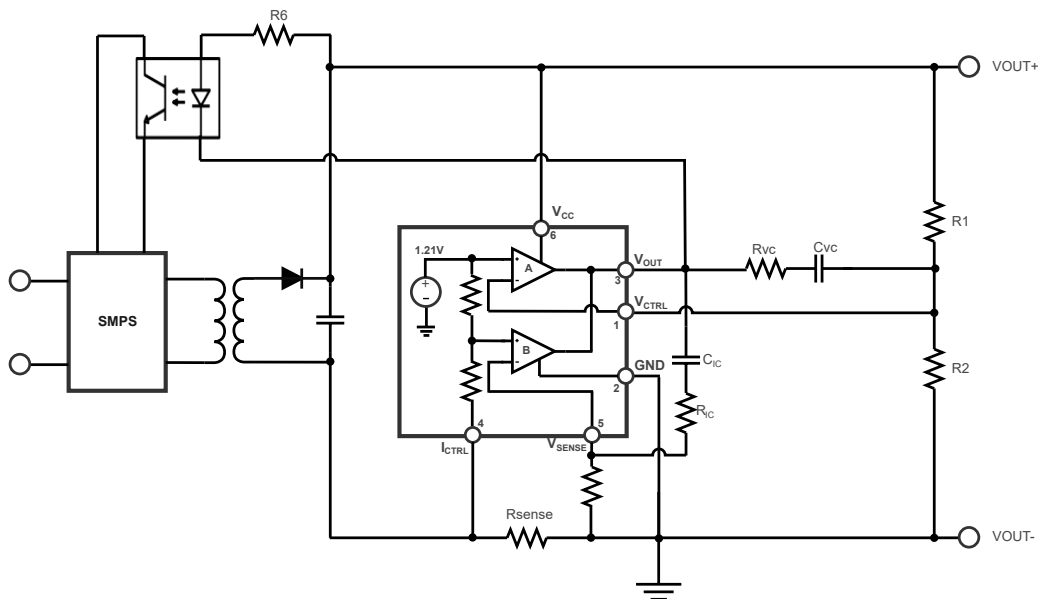

TPA725x in a Constant-Current and Constant-Voltage Battery Charger


## Table of Contents

<b>Features</b> .....	1
<b>Applications</b> .....	1
<b>Description</b> .....	1
<b>Typical Application Circuit</b> .....	1
<b>Revision History</b> .....	3
<b>Pin Configuration and Functions</b> .....	4
<b>Specifications</b> .....	5
Absolute Maximum Ratings <sup>(1)</sup> .....	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics.....	7
<b>Detailed Description</b> .....	8
Overview.....	8
Functional Block Diagram.....	8
Feature Description.....	8
<b>Application and Implementation</b> .....	9
Application Information .....	9
Typical Application.....	9
<b>Tape and Reel Information</b> .....	11
<b>Package Outline Dimensions</b> .....	12
SOT23-6.....	12
<b>Order Information</b> .....	13
<b>IMPORTANT NOTICE AND DISCLAIMER</b> .....	14

## Revision History

Date	Revision	Notes
2023-08-20	Rev.A.0	Initial version.
2024-12-18	Rev.A.1	The following updates are all about the new datasheet formats or typos, and the actual product remains unchanged. <ul style="list-style-type: none"><li data-bbox="550 568 1018 602">• Updated the Tape and Reel Information.</li></ul>

## Pin Configuration and Functions

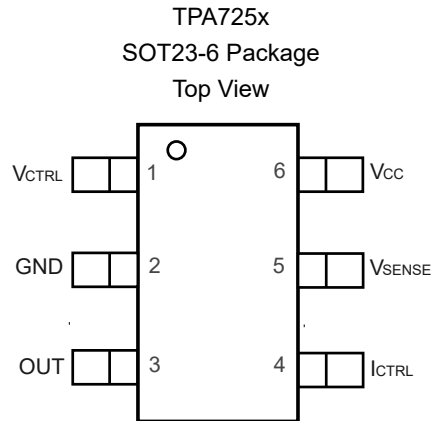

**Table 1. Pin Functions: TPA725x**

Pin		I/O	Description
No.	Name		
1	V <sub>CTRL</sub>	I	Inverting input of the voltage loop op amp.
2	GND		Ground.
3	V <sub>OUT</sub>	O	Common open-drain output of the two internal op amps.
4	I <sub>CTRL</sub>	I	Non-inverting input of the current loop op amp.
5	V <sub>SENSE</sub>	I	Inverting input of the current loop op amp.
6	V <sub>CC</sub>		Power supply.

## Specifications

### Absolute Maximum Ratings <sup>(1)</sup>

Parameter		Min	Max	Unit
	Supply Voltage, $V_{CC}$		40	V
	Voltage on Input and Output Pins	-0.3	$V_{CC} + 0.3$	V
	Input Current: $V_{CTRL}$ , $I_{CTRL}$ , $V_{SENSE}$ <sup>(2)</sup>	-10	10	mA
	Output Short-Circuit Duration <sup>(3)</sup>		Infinite	
$T_J$	Maximum Junction Temperature		150	°C
$T_A$	Operating Temperature Range	-40	125	°C
$T_{STG}$	Storage Temperature Range	-65	150	°C
$T_L$	Lead Temperature (Soldering, 10 sec)		260	°C

- (1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.
- (2) The inputs are protected by ESD protection diodes to each power supply. If the input extends more than 300 mV beyond the power supply, the input current should be limited to less than 10 mA.
- (3) A heat sink may be required to keep the junction temperature below the absolute maximum. This depends on the power supply voltage and how many amplifiers are shorted. Thermal resistance varies with the amount of PC board metal connected to the package. The specified values are for short traces connected to the leads.

### ESD, Electrostatic Discharge Protection

Symbol	Parameter	Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	1	kV

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
$V_S$	Supply Voltage, $V_{CC}$	3		36	V
$T_A$	Operating Temperature Range	-40		125	°C

### Thermal Information

Package Type	$\theta_{JA}$	$\theta_{JC}$	Unit
SOT23-6	250	81	°C/W

**Constant Voltage and Constant Current Controller**
**Electrical Characteristics**

 All test conditions:  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 5\text{ V}$ , unless otherwise noted.

Symbol	Parameter	Conditions	$T_A$	Min	Typ	Max	Unit
<b>Power Supply</b>							
$V_{CC}$	Supply Voltage Range			3		36	V
$I_Q$	Quiescent Current, No Load	$V_{CC} = 36\text{ V}$			150	185	$\mu\text{A}$
			-40 to 125°C			200	$\mu\text{A}$
		$V_{CC} = 5\text{ V}$			125	170	$\mu\text{A}$
			-40 to 125°C			200	$\mu\text{A}$
<b>Voltage Control Loop</b>							
$GM_V$	Transconduction Gain	Sink current only			8		mA/mV
$V_{REF\_V}$	Voltage Reference for Voltage Control Loop			1.198	1.21	1.222	V
			-40 to 125°C	1.17		1.25	V
$I_B$	Input Bias Current		-40 to 125°C		200		pA
<b>Current Control Loop</b>							
$GM_I$	Transconduction Gain	Sink current only			6		mA/mV
$V_{REF\_I}$	Voltage Reference for Current Control Loop; Connect $V_{SENSE}$ to GND, $V_{REF\_I} =$ Voltage on $V_{SENSE} -$ Voltage on $I_{CTRL}$	TPA7255			50		mV
			-40 to 125°C				mV
		TPA7256		66	70	74	mV
			-40 to 125°C	63		77	mV
		TPA7257			100		mV
			-40 to 125°C				mV
		TPA7258			150		mV
			-40 to 125°C				mV
TPA7259			200		mV		
	-40 to 125°C				mV		
	Current Out of Pin $I_{CTRL}$			10	20	30	$\mu\text{A}$
			-40 to 125°C		25		$\mu\text{A}$
$V_{OL}$	Low-Level Output Voltage	$I_{SINK} = 2\text{ mA}$			100	200	mV
			-40 to 125°C			300	mV
$I_{OS}$	Output Short-Circuit Current	Sink current only		15	25		mA
			-40 to 125°C	10			mA

Typical Performance Characteristics

All test conditions: test chip is TPA7256,  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

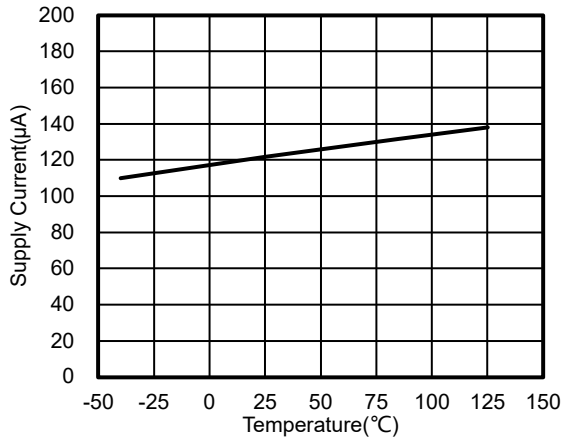


Figure 1. Supply Current vs. Temperature

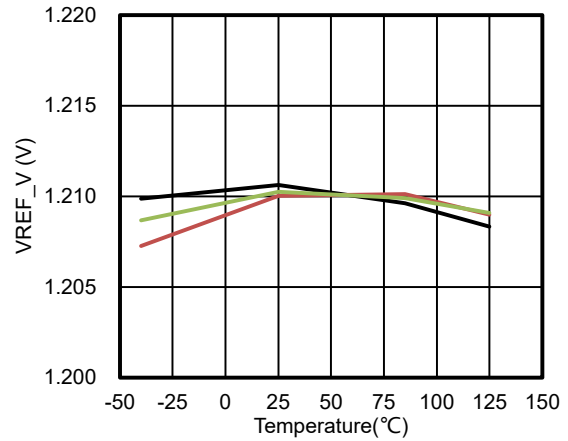


Figure 2. Reference for Voltage Loop vs. Temperature

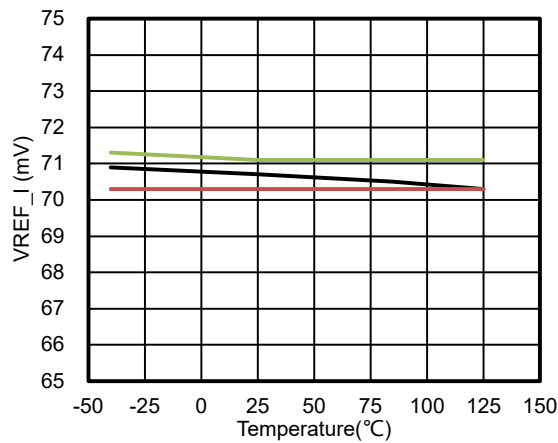


Figure 3. Reference for Current Loop vs. Temperature

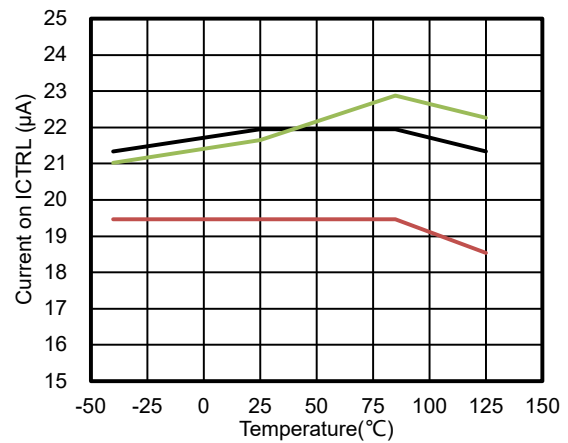



Figure 4. Current on ICTRL vs. Temperature

## Detailed Description

### Overview

The TPA725x series integrates two op amps with an open-drain output, a 1.21-V voltage reference, and a lower-voltage reference for low-side current-sensing circuits.

### Functional Block Diagram

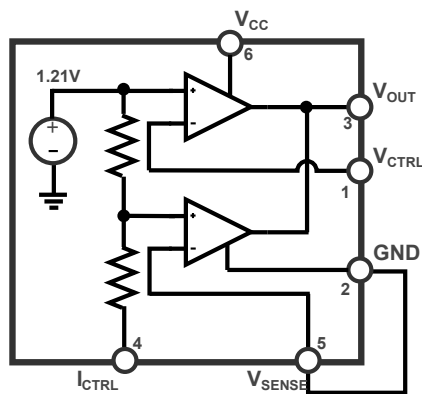

$$V_{REF\_V} = 1.21V$$

Connect Pin 5 to Pin 2.

$$V_{REF\_I} = \text{Voltage on } V_{SENSE} \text{ Pin(Pin 5)} \\ - \text{Voltage on } I_{CTRL} \text{ Pin(Pin 4)}$$

$V_{REF\_I}$  voltage:  
 TPA7255: 50mV  
 TPA7256: 70mV  
 TPA7257: 100mV  
 TPA7258: 150mV  
 TPA7259: 200mV

Figure 5. Functional Block Diagram

## Feature Description

### Operating Voltage

The TPA725x series is designed for single-supply operation from 3 V to 36 V. The high-power supply voltage helps the TPA725x survive on the noisy power supply.

### Low-Power Operation

The TPA725x series has a 200- $\mu$ A power supply, which is very useful in low-power applications.

## Application and Implementation

### Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## Application Information

### Power Supply Recommendations


Place 0.1- $\mu\text{F}$  bypass capacitors close to the power-supply pins to reduce coupling errors from the noise or high-impedance power supplies.

## Typical Application

Figure 6 shows the typical application schematic.

### Constant-Current and Constant-Voltage Battery Charger

Figure 6 shows the device configured in a constant-current and constant-voltage battery charger.

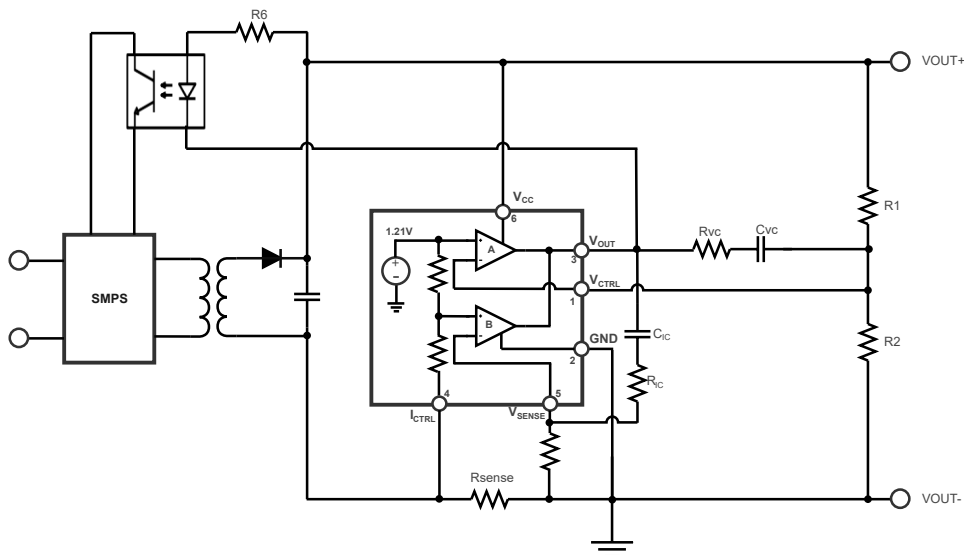

**Figure 6. TPA725x in a Constant-Current and Constant-Voltage Battery Charger**

The voltage control loop is controlled by the operational amplifier A and the resistor divider (R1, R2), and the output voltage is given in Equation 1.

$$V_{\text{OUT}} = V_{\text{REF\_V}} \times \frac{R1 + R2}{R2} \quad (1)$$

Where:  $V_{\text{OUT}}$  is the desired maximum output voltage, and  $V_{\text{REF\_V}}$  is the voltage reference for the voltage control loop.

The current control loop is controlled by the operational amplifier B, and the maximum output current is given in Equation 2.

---



**Constant Voltage and Constant Current Controller**

$$I_{OUT} = \frac{V_{REF\_I}}{R_{SENSE}} \quad (2)$$

Where:  $I_{OUT}$  is the desired maximum output current, and  $V_{REF\_I}$  is the voltage reference for the current control loop.

The open-drain outputs of the two operational amplifiers are connected to the opto-coupler, enabling an ORing function that activates the opto-coupler whenever the values of the current or voltage are too high.

### Tape and Reel Information

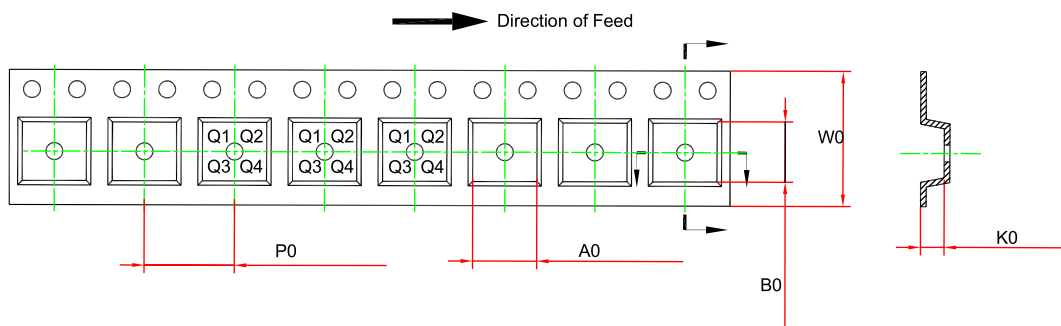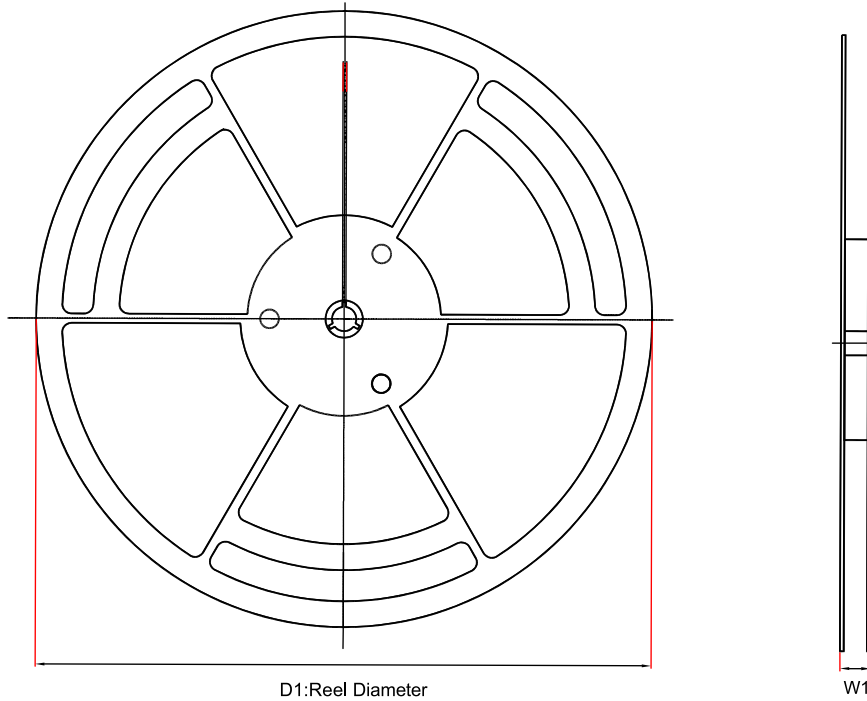


Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) <sup>(1)</sup>	B0 (mm) <sup>(1)</sup>	K0 (mm) <sup>(1)</sup>	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA725x-S6TR	SOT23-6	180.0	12.0	3.3	3.2	1.4	4.0	8.0	Q3

(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOT23-6

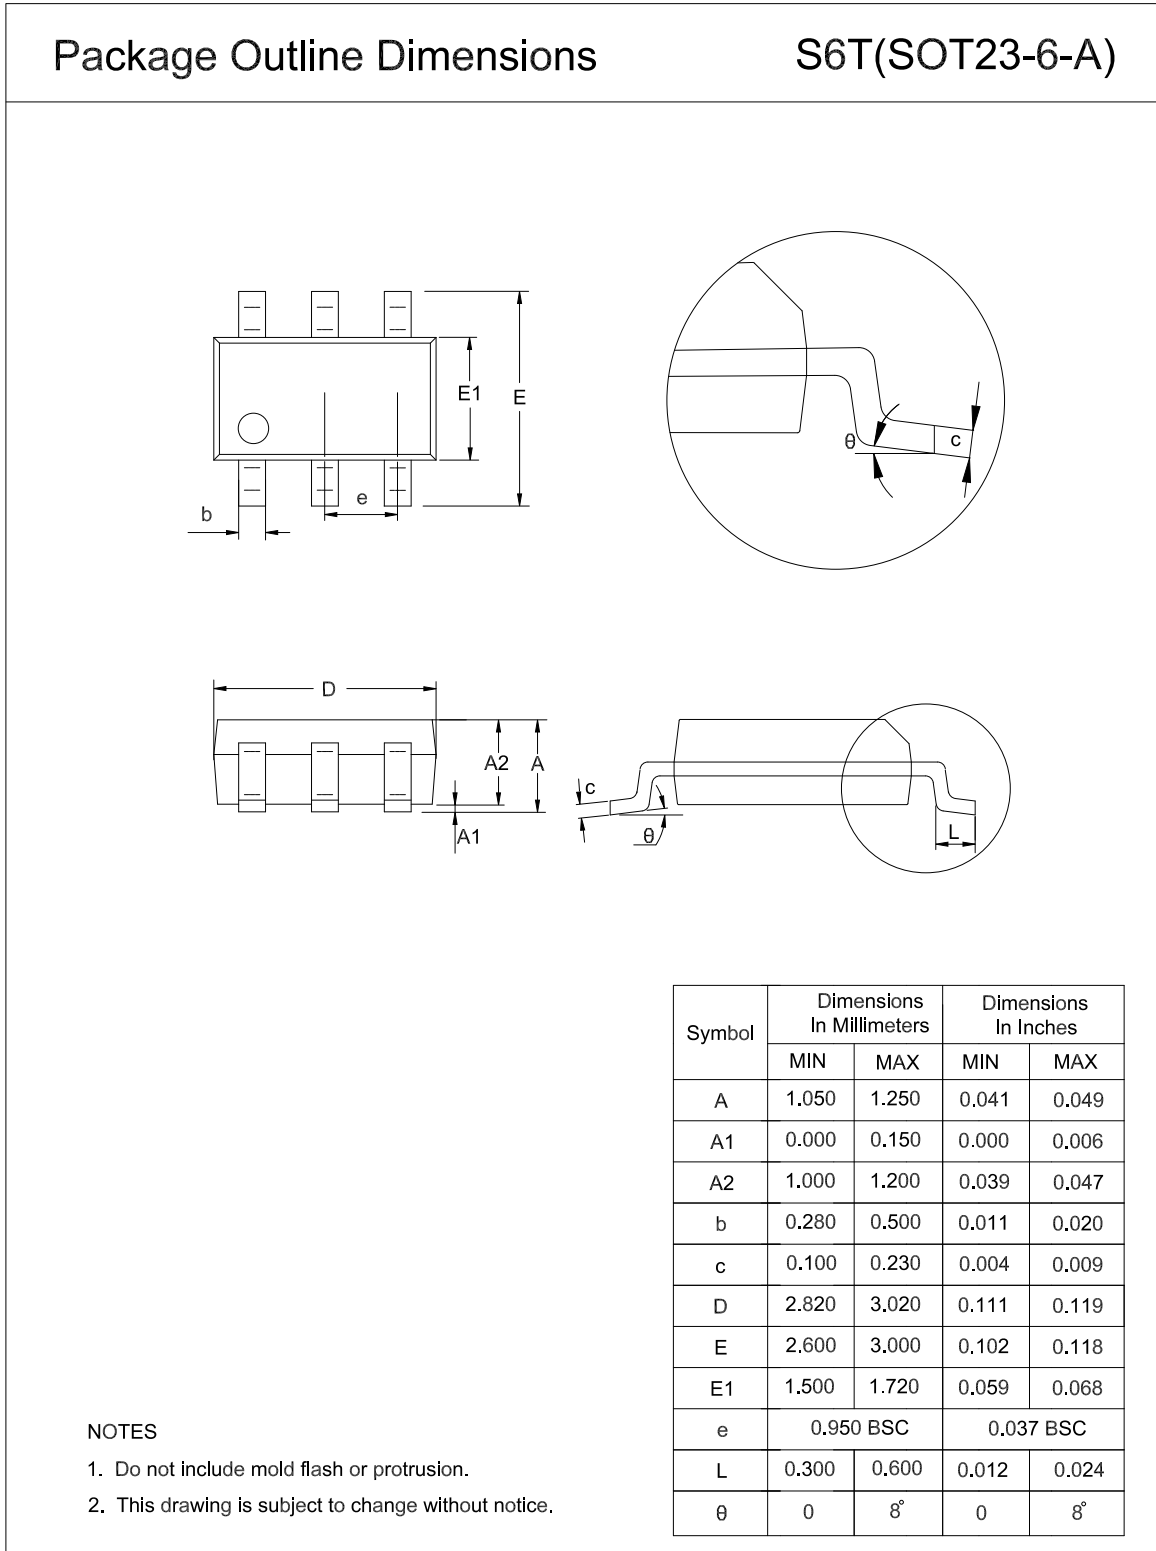

## Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA7255-S6TR <sup>(1)</sup>	-40 to 125°C	SOT23-6	755	3	Tape and Reel, 3000	Green
TPA7256-S6TR	-40 to 125°C	SOT23-6	756	3	Tape and Reel, 3000	Green
TPA7257-S6TR <sup>(1)</sup>	-40 to 125°C	SOT23-6	757	3	Tape and Reel, 3000	Green
TPA7258-S6TR <sup>(1)</sup>	-40 to 125°C	SOT23-6	758	3	Tape and Reel, 3000	Green
TPA7259-S6TR <sup>(1)</sup>	-40 to 125°C	SOT23-6	759	3	Tape and Reel, 3000	Green

(1) For future products, contact the 3PEAK factory for more information and samples.

**Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## IMPORTANT NOTICE AND DISCLAIMER

**Copyright**© 3PEAK 2012-2024. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.