

## Features

- Wide Input Voltage Range:
  - 3 V to 15 V
- Fixed Output Voltage:
  - 1.25 V, 2.048 V, 2.5 V, 3 V, 3.3 V, 4.096 V, 4.5 V, and 5 V
- Low Temperature Coefficient:
  - 2 ppm/°C Typical from 0°C to 70°C
  - 4 ppm/°C Typical from -40°C to 125°C
  - 10 ppm/°C Maximum from -40°C to 125°C
- High Initial Accuracy:
  - 0.05% Maximum
- Low Noise:
  - 3  $\mu$ Vpp/V
- Temperature Range: -40°C to 125°C
- Package Options:
  - SOT23-5

## Applications

- Battery Test Equipment
- Industry Control
- Precision Instrumentation
- Medical Equipment


## Description

The TPR31 series is a family of high-precision and low-temperature-drift voltage references with the initial accuracy of 0.05% and the maximum temperature coefficient of 10 ppm/°C. All products of the TPR31 series are able to support both sinking and sourcing current of  $\pm 10$  mA and have a low dropout voltage.

The high precision and excellent temperature stability performance make the TPR31 series an ideal reference in the system with high resolution requirement.

The TPR31 series provides a SOT23-5 package with a wide range of output voltages. All the products are qualified to operate with the temperature range from -40°C to +125°C.

## Typical Application Circuit

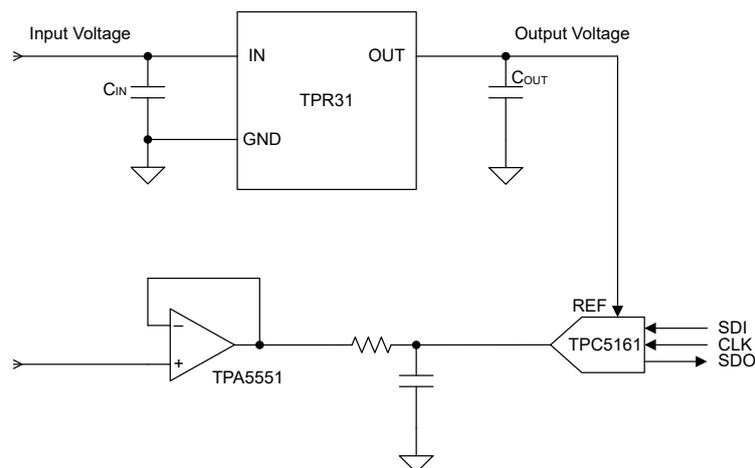

## Table of Contents

<b>Features</b> .....	<b>1</b>
<b>Applications</b> .....	<b>1</b>
<b>Description</b> .....	<b>1</b>
<b>Typical Application Circuit</b> .....	<b>1</b>
<b>Product Family Table</b> .....	<b>3</b>
<b>Revision History</b> .....	<b>3</b>
<b>Pin Configuration and Functions</b> .....	<b>4</b>
<b>Specifications</b> .....	<b>5</b>
Absolute Maximum Ratings <sup>(1)</sup> .....	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics.....	8
<b>Detailed Description</b> .....	<b>11</b>
Overview.....	11
Functional Block Diagram.....	11
Feature Description.....	11
<b>Application and Implementation</b> .....	<b>12</b>
Application Information .....	12
Typical Application.....	12
<b>Layout</b> .....	<b>13</b>
Layout Guideline.....	13
Layout Example.....	13
<b>Tape and Reel Information</b> .....	<b>14</b>
<b>Package Outline Dimensions</b> .....	<b>15</b>
SOT23-5.....	15
<b>Order Information</b> .....	<b>16</b>
<b>IMPORTANT NOTICE AND DISCLAIMER</b> .....	<b>17</b>

## Product Family Table


Order Number	Output Voltage	Package
TPR3112-S5TR-S <sup>(1)</sup>	1.25V	SOT23-5
TPR3120-S5TR-S <sup>(1)</sup>	2.048V	SOT23-5
TPR3125-S5TR-S	2.5V	SOT23-5
TPR3130-S5TR-S	3.0V	SOT23-5
TPR3133-S5TR-S	3.3V	SOT23-5
TPR3140-S5TR-S <sup>(1)</sup>	4.096V	SOT23-5
TPR3145-S5TR-S <sup>(1)</sup>	4.5V	SOT23-5
TPR3150-S5TR-S <sup>(1)</sup>	5.0V	SOT23-5

(1) Preview

## Revision History

Revision	Notes
Rev.Pre.0	Preliminary revision.
Rev.A.0	Initial released.
Rev.A.1	Updated Long-Term Stability.

## Pin Configuration and Functions

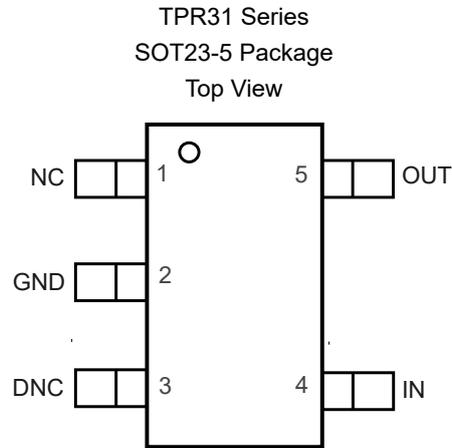

**Table 1. Pin Functions: TPR31**

Pin Number	Pin Name	I/O	Description
3	DNC	–	Do not connect. Left this pin open or connected to the ground.
2	GND	–	Ground.
4	IN	I	Supply voltage input pin.
1	NC	–	No internal connection.
5	OUT	O	Reference voltage output pin.

## Low-Noise, Low-Drift, Precision Voltage Reference

### Specifications

#### Absolute Maximum Ratings <sup>(1)</sup>

Parameter		Min	Max	Unit
V <sub>IN</sub>	Supply Voltage	-0.3	20	V
T <sub>J</sub>	Maximum Junction Temperature	-40	150	°C
T <sub>A</sub>	Operating Temperature Range	-40	125	°C
T <sub>STG</sub>	Storage Temperature Range	-65	150	°C
T <sub>L</sub>	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) All voltage values are with respect to ground.

#### ESD, Electrostatic Discharge Protection

Parameter		Condition	Value	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2	kV
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	±1	kV

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

#### Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V <sub>IN</sub>		3		15	V
I <sub>OUT</sub>		-10		10	mA
C <sub>OUT</sub>		0.1	10	100	μF
T <sub>J</sub>	Junction Temperature Range	-40		125	°C

#### Thermal Information

Package Type	θ <sub>JA</sub>	θ <sub>JC,top</sub>	θ <sub>JB</sub>	θ <sub>JC,bottom</sub>	Unit
SOT23-5	150	110	60	-	°C/W

**Low-Noise, Low-Drift, Precision Voltage Reference**
**Electrical Characteristics**

All test condition is at  $T_A = 25^\circ\text{C}$ .  $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V}$  or  $3\text{ V}$ , whichever is grater,  $I_{OUT} = 0\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ , unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit	
<b>Output Voltage</b>							
$V_{OUT}$	Output Voltage	TPR3112		1.25		V	
		TPR3120		2.048		V	
		TPR3125		2.5		V	
		TPR3130		3		V	
		TPR3133		3.3		V	
		TPR3140		4.096		V	
		TPR3145		4.5		V	
		TPR3150		5		V	
	Initial Accuracy		-0.05%		+0.05%		
Output Noise	$f = 0.1\text{ Hz to }10\text{ Hz}$		3		$\mu\text{V}_{PP}/\text{V}$		
<b>Input Voltage and Current</b>							
$V_{IN}$	Input Voltage		$V_{IN,MIN}^{(1)}$		15	V	
$I_Q$	Quiescent Current	$T_A = -40^\circ\text{C to }125^\circ\text{C}$		0.6	1	mA	
<b>Dropout Voltage</b>							
$V_{DO}$	Dropout Voltage <sup>(2)</sup>	$I_{OUT} = \pm 5\text{ mA}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$			200	mV	
		$I_{OUT} = \pm 10\text{ mA}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$			400	mV	
<b>Output Voltage Temperature Drift</b>							
TC	Temperature Coefficient	$T_A = 0\text{ to }70^\circ\text{C}$		2		ppm/ $^\circ\text{C}$	
		$T_A = -40^\circ\text{C to }125^\circ\text{C}$		4	10	ppm/ $^\circ\text{C}$	
<b>Outout Regulation</b>							
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	$V_{IN} = V_{IN,MIN}$ to $15\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$		0.1		ppm/V	
		$V_{IN} = 6\text{ V to }15\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$		0.1		ppm/V	
		$V_{IN} = V_{IN,MIN}$ to $6\text{ V}$ , $V_{OUT} = 1.25\text{ V}$ , $2.048\text{ V}$ , $2.5\text{ V}$ and $3\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$				20	ppm/V
		$V_{IN} = V_{IN,MIN}$ to $6\text{ V}$ , $V_{OUT} = 3.3\text{ V}$ and $4.096\text{ V}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$				25	ppm/V
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	$V_{IN} = V_{IN,MIN}$ , $-10\text{ mA} < I_{OUT} < 10\text{ mA}$		2.5	20	ppm/mA	
		$V_{IN} = V_{IN,MIN}$ , $-10\text{ mA} < I_{OUT} < 10\text{ mA}$ , $T_A = -40^\circ\text{C to }125^\circ\text{C}$		2.5	20	ppm/mA	
<b>Thermal Hysteresis</b>							

**Low-Noise, Low-Drift, Precision Voltage Reference**







Parameter		Conditions	Min	Typ	Max	Unit
THYS	Thermal Hysteresis	Cycle 1 (+25°C to -40°C to +125°C to 25 °C)		100		ppm
		Cycle 2 (+25°C to -40°C to +125°C to 25 °C)		42		ppm
		Cycle 1 (+25°C to +70°C to 0°C to 25 °C)		12		ppm
		Cycle 2 (+25°C to +70°C to 0°C to 25 °C)		8		ppm
<b>Long-Term Stability</b>						
LTS	Long-Term Stability	0 to 1000 hours, SOT23-5 Package		200		ppm
		0 to 2000 hours, SOT23-5 Package		230		ppm
		1000 to 2000 hours, SOT23-5 Package		40		ppm
<b>Turn-On Settling Time</b>						
t <sub>ON</sub>	Turn-on Settling Time	To 0.1% with CL = 1 μF		150		μs
<b>Short-Circuit Current</b>						
I <sub>SC</sub>	Short-Circuit Current	V <sub>OUT</sub> = 0 V		121		mA
<b>Capacitive Load</b>						
C <sub>L</sub>			0.1		100	μF

(1) V<sub>IN,MIN</sub> = V<sub>OUT(NOM)</sub> + 0.4 V or 3 V, whichever is greater.

(2) Dropout voltage is not tested for the output voltage below 3 V.

Typical Performance Characteristics

All test conditions:  $T_A = 25^\circ\text{C}$ .  $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V}$  or  $3\text{ V}$ , whichever is greater;  $I_{OUT} = 0\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1\ \mu\text{F}$ , unless otherwise noted.

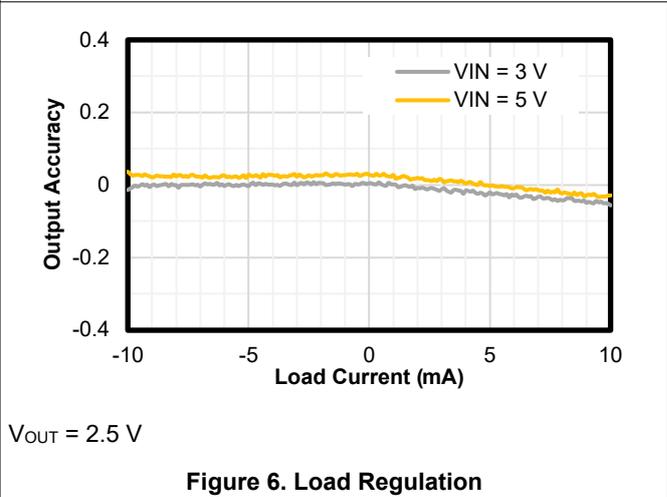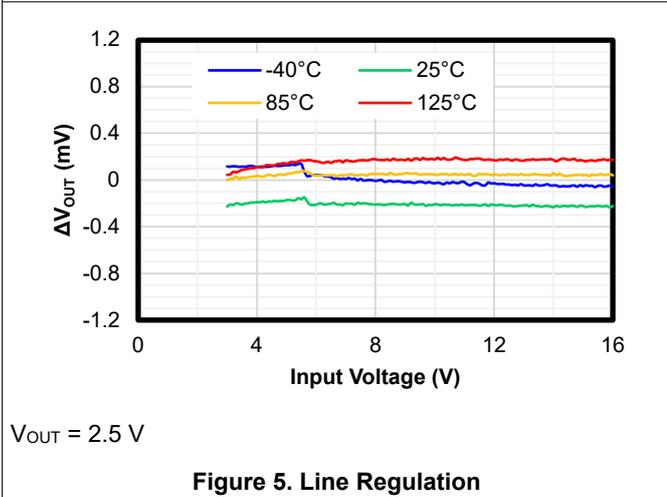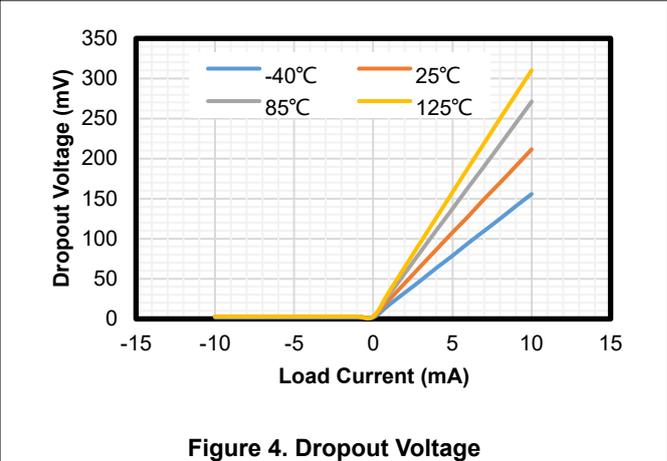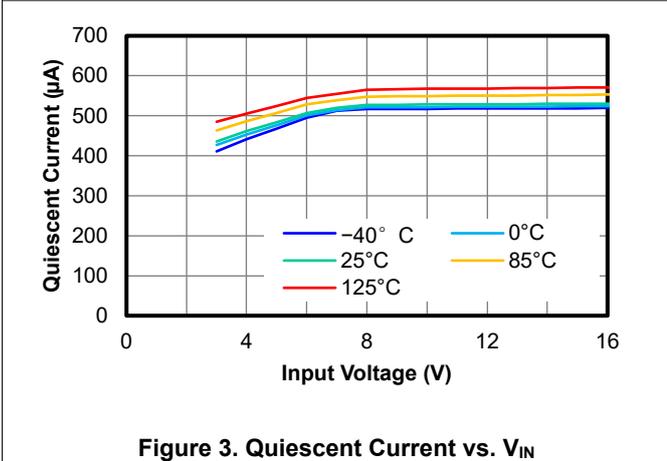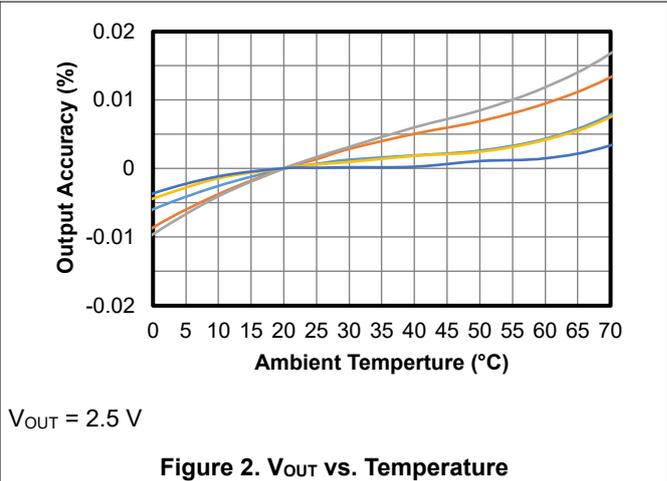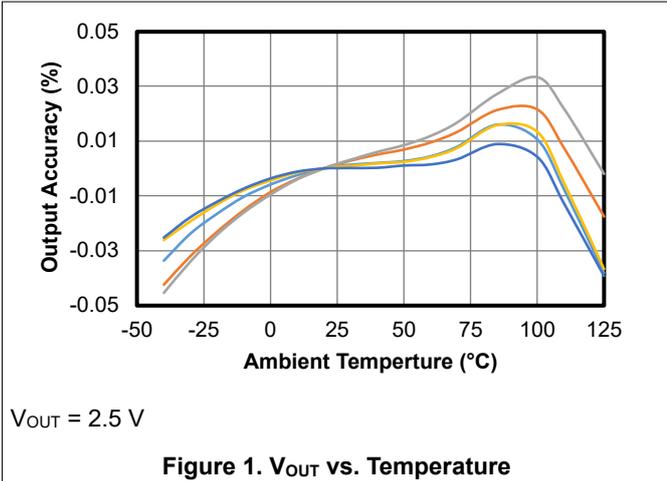

Low-Noise, Low-Drift, Precision Voltage Reference

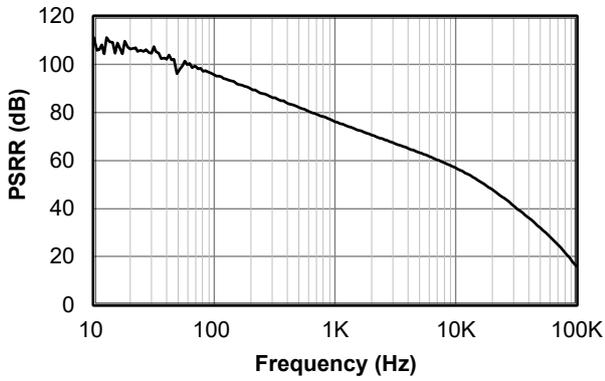


Figure 7. PSRR



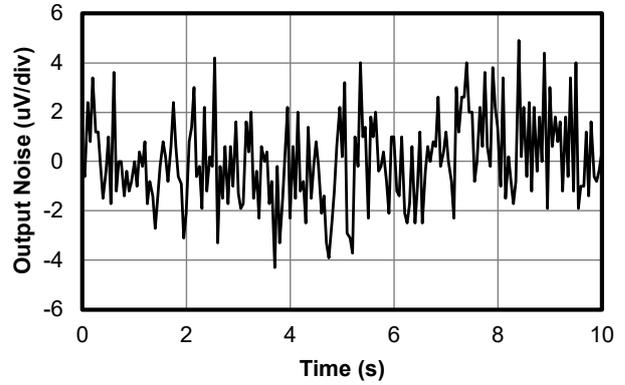


Figure 8. Noise

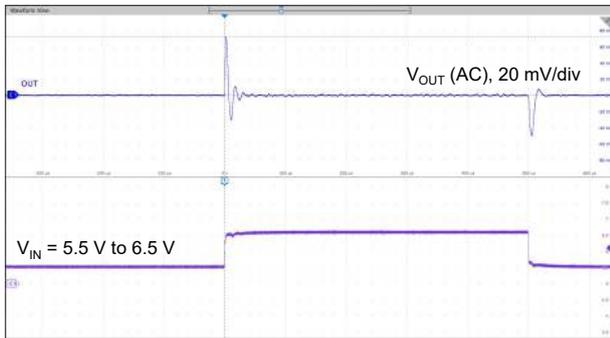


$V_{IN} = 5.5\text{ V to }6.5\text{ V}$ ,  $C_{OUT} = 1\ \mu\text{F}$

Figure 9. Line Transient

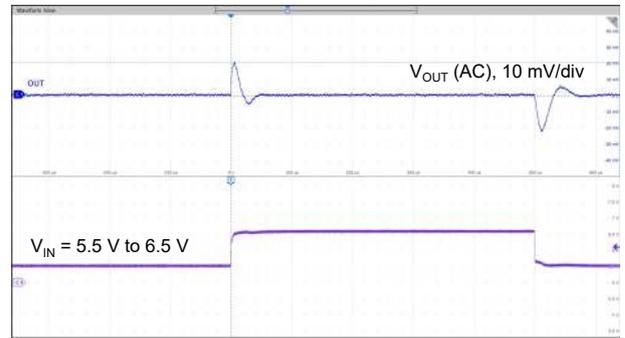

$V_{IN} = 5.5\text{ V to }6.5\text{ V}$ ,  $C_{OUT} = 10\ \mu\text{F}$

Figure 10. Line Transient

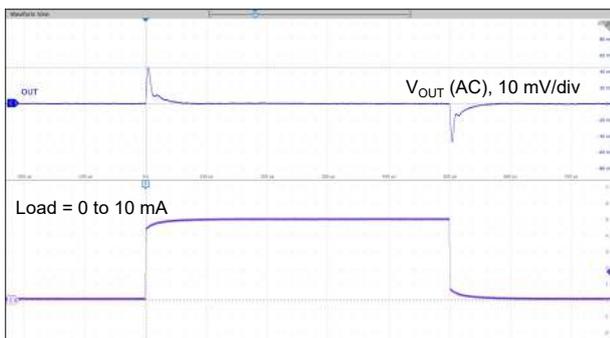

Load = 0 to 10 mA,  $C_{OUT} = 1\ \mu\text{F}$


Figure 11. Load Transient



Load = 0 to 10 mA,  $C_{OUT} = 10\ \mu\text{F}$


Figure 12. Load Transient

Low-Noise, Low-Drift, Precision Voltage Reference

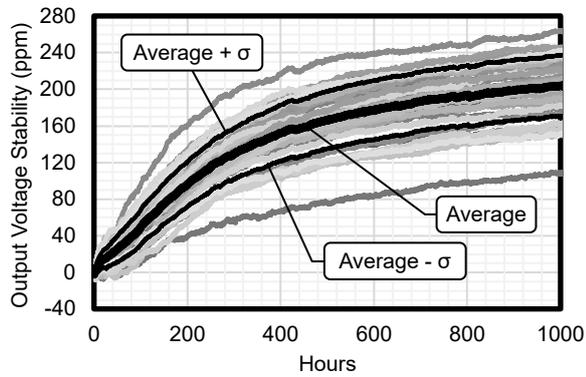


0 to 1000 Hours, 40 Units

Figure 13. Long-Term Stability

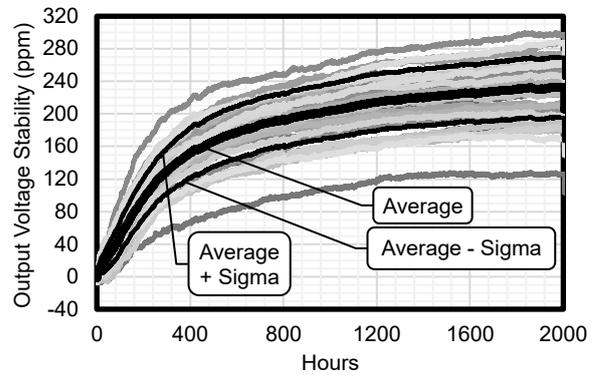

0 to 2000 Hours, 40 Units

Figure 14. Long-Term Stability

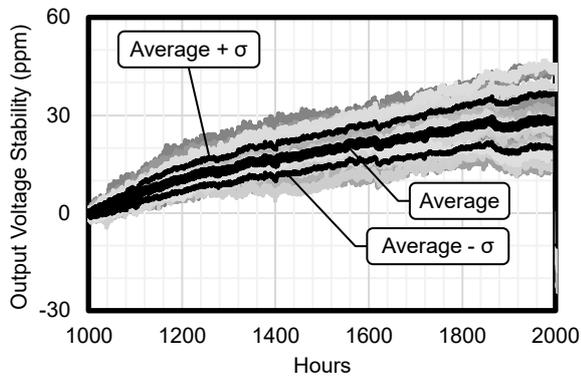

1000 to 2000 Hours, 40 Units

Figure 15. Long-Term Stability


## Detailed Description

### Overview

The TPR31 series is a family of high-precision and low-temperature-drift voltage references with 0.05% initial accuracy and maximum 10-ppm/°C temperature coefficient. All products of the TPR31 series are able to support both sinking and sourcing current of ±10 mA and have a low dropout voltage.

The high precision and excellent temperature stability performance make the TPR31 series an ideal reference in the system with high resolution requirement.

### Functional Block Diagram

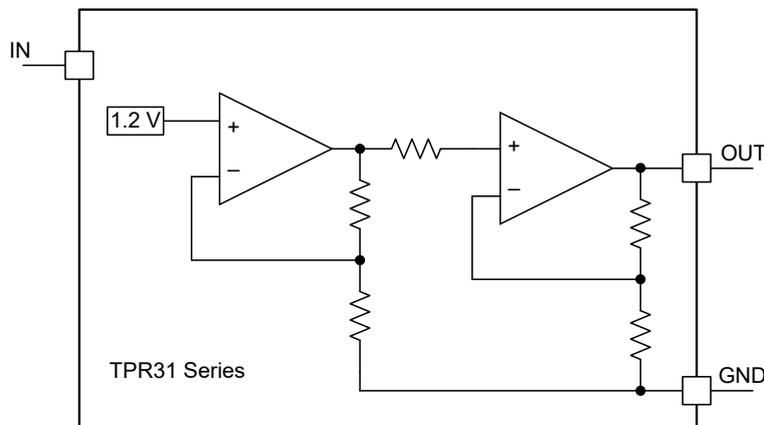

**Figure 16. Functional Block Diagram**

## Feature Description

### Temperature Drift

The TPR31 is one of the low-temperature-drift voltage references. Temperature drift is defined as the voltage variation over the operating temperature change, which can be calculated as [Equation 1](#).

$$\text{Temperature Drift} = \left( \frac{V_{\text{OUT,max}} - V_{\text{OUT,min}}}{V_{\text{OUT}}} \right) / (T_{\text{max}} - T_{\text{min}}) \times 10^6 \text{ (ppm/°C)} \quad (1)$$

Where,  $V_{\text{OUT,max}}$  and  $V_{\text{OUT,min}}$  are the maximum and minimum voltage values during the temperature change,  $T_{\text{max}}$  and  $T_{\text{min}}$  are the temperature range,  $V_{\text{OUT}}$  is the nominal output voltage.

The maximum temperature drift of TPR31 is 10 ppm/°C maximum from -40°C to 125°C.

### Thermal Hysteresis

Thermal hysteresis is defined as the voltage change after the operating temperature cycling, which can be calculated as [Equation 2](#).

$$\text{Thermal Hysteresis} = \frac{|V_{\text{PRE}} - V_{\text{POST}}|}{V_{\text{OUT}}} \times 10^6 \text{ (ppm)} \quad (2)$$

Where,  $V_{\text{PRE}}$  is the output voltage before the temperature cycling and  $V_{\text{POST}}$  is the output voltage after the temperature cycling,  $V_{\text{OUT}}$  is the nominal output voltage.

## Application and Implementation

### Note


Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

## Application Information

The TPR31 series is a family of high-precision and low-temperature-drift voltage references with 0.05% initial accuracy and maximum 10-ppm/°C temperature coefficient. All products of the TPR31 series are able to support both sinking and sourcing current of ±10 mA and have a low dropout voltage.

## Typical Application

Figure 17 shows the typical application schematic.

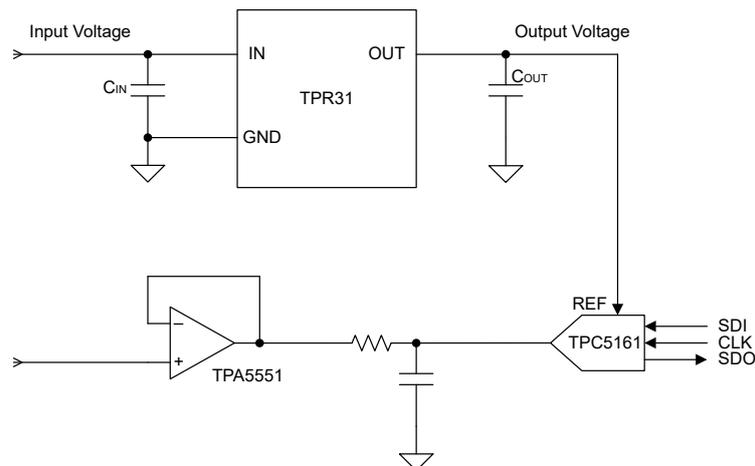

**Figure 17. Typical Application Circuit**

## Power Dissipation and Thermal Consideration

During normal operation, the device junction temperature should meet the requirement in the [Recommended Operating Conditions](#) table. Use below equations to calculate the power dissipation and estimate the junction temperature.

The power dissipation can be calculated using [Equation 3](#).

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_Q \quad (3)$$

The junction temperature can be estimated using [Equation 4](#).  $\theta_{JA}$  is the junction-to-ambient thermal resistance.

$$T_J = T_A + P_D \times \theta_{JA} \quad (4)$$

## Layout

### Layout Guideline

- Both input capacitors and output capacitors must be placed as close to the device pins as possible.
- It is recommended to bypass the IN pin to ground with a 1- $\mu$ F to 10- $\mu$ F capacitor in parallel with a 0.1- $\mu$ F small ceramic capacitor. The loop area formed by the bypass capacitor connection, the IN pin, and the GND pin of the system must be as small as possible.
- It is required to place a decoupling 1- $\mu$ F to 50- $\mu$ F capacitor at the output. A small 1- $\mu$ F ceramic capacitor in parallel is recommended to filter the noise and improve the output transient performance.

### Layout Example



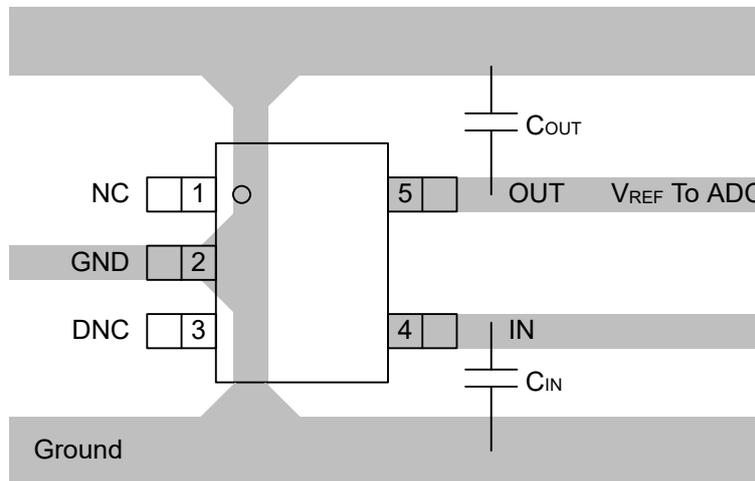



Figure 18. Layout Example

Tape and Reel Information

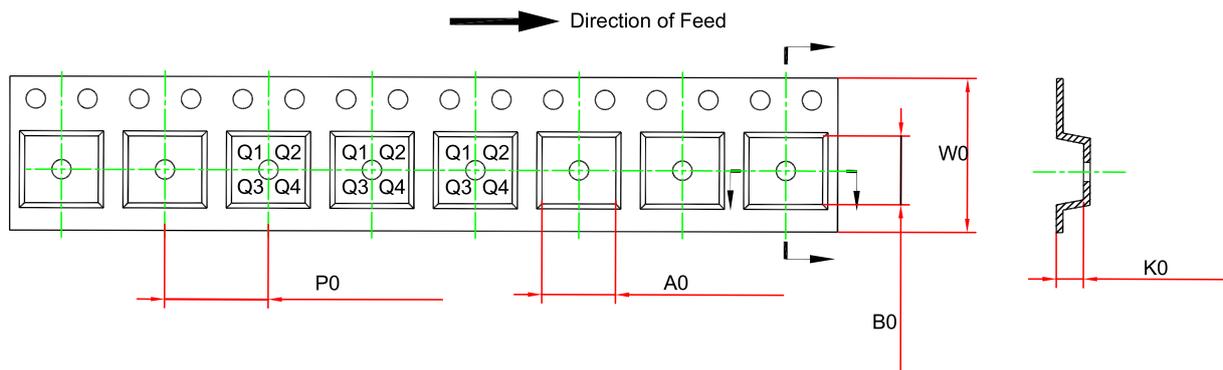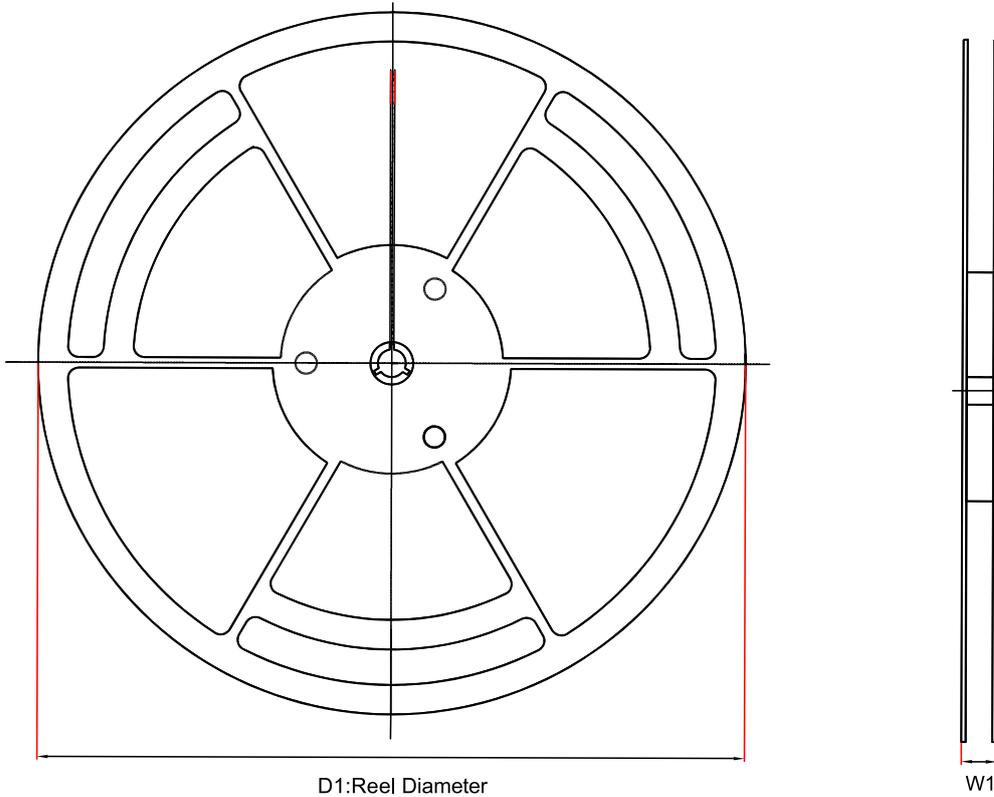

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPR31xx-SO1R (1)	SOT23-5	180	13.1	3.2	3.2	1.4	4	8	Q3

(1) Output voltage value, xx = 12 to 50. For example, 25 means output voltage of 2.5 V.

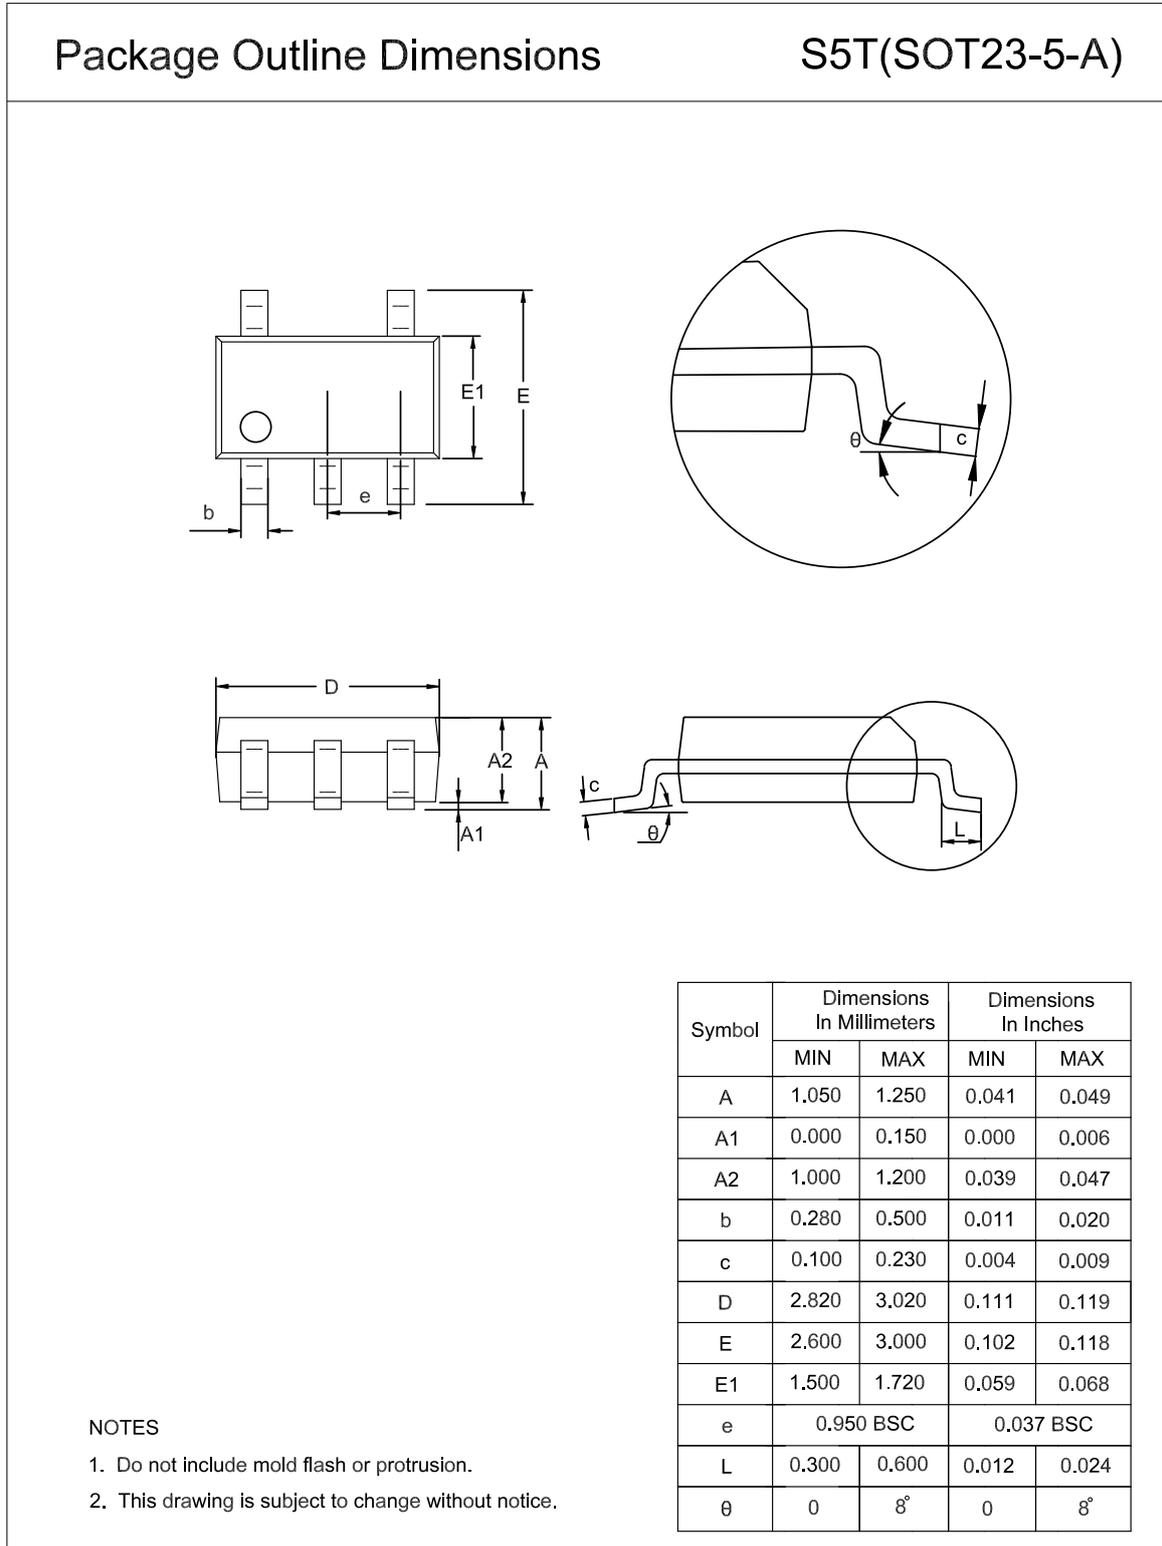**Package Outline Dimensions**
**SOT23-5**


**Order Information**

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPR3112-S5TR-S <sup>(1)</sup>	-40°C to +125°C	SOT23-5	R5A	MSL3	Tape and Reel, 3,000	Green
TPR3120-S5TR-S <sup>(1)</sup>	-40°C to +125°C	SOT23-5	R5B	MSL3	Tape and Reel, 3,000	Green
TPR3125-S5TR-S	-40°C to +125°C	SOT23-5	R5C	MSL3	Tape and Reel, 3,000	Green
TPR3130-S5TR-S	-40°C to +125°C	SOT23-5	R5D	MSL3	Tape and Reel, 3,000	Green
TPR3133-S5TR-S	-40°C to +125°C	SOT23-5	R5E	MSL3	Tape and Reel, 3,000	Green
TPR3140-S5TR-S <sup>(1)</sup>	-40°C to +125°C	SOT23-5	R5F	MSL3	Tape and Reel, 3,000	Green
TPR3145-S5TR-S <sup>(1)</sup>	-40°C to +125°C	SOT23-5	R5H	MSL3	Tape and Reel, 3,000	Green
TPR3150-S5TR-S <sup>(1)</sup>	-40°C to +125°C	SOT23-5	R5G	MSL3	Tape and Reel, 3,000	Green

(1) For future products, contact 3PEAK factory for more information and samples.

(2) **Green:** 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

## **IMPORTANT NOTICE AND DISCLAIMER**

**Copyright**© 3PEAK 2012-2024. All rights reserved.

**Trademarks.** Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

**Performance Information.** Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

**Disclaimer.** 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank