



World wide



Isolated



Safety Approvals




OCP



OVP

TUHS-series

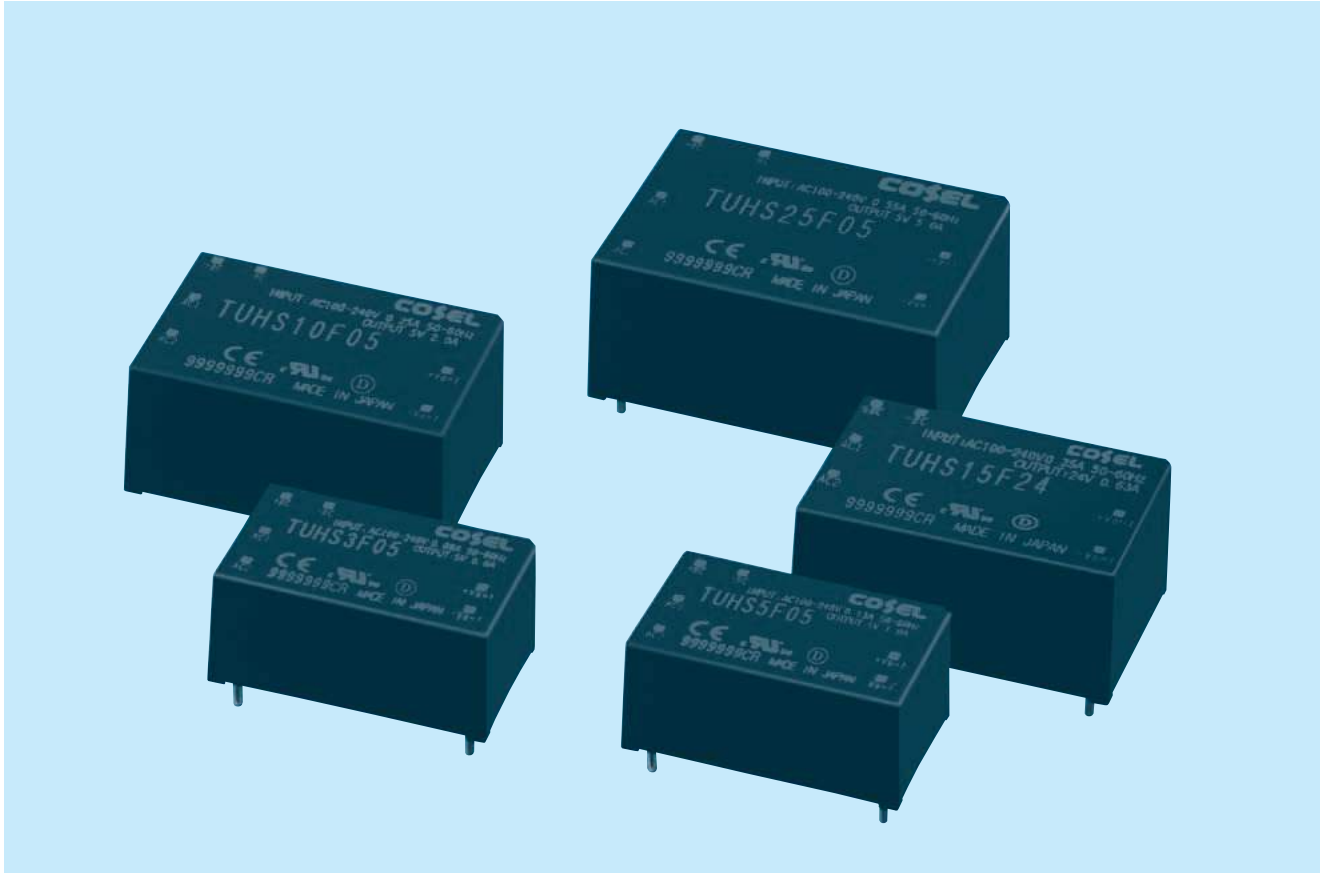

Feature

- P.C.board mount AC-DC Converter
- Design flexibility for Hold-Up time and expected life
- Small size
- Built-in overcurrent and overvoltage protection circuits
- High efficiency by synchronous rectification technology (TUHS25)
- Not built-in aluminum and tantalum electrolytic capacitor

CE marking

- Low voltage directive
- RoHS Directive

UKCA marking

- Electrical Equipment Safety Regulations
- RoHS Regulations

Safety Approval

- UL60950-1, C-UL, EN62368-1

5-year warranty


TUHS3

TUH S 3 F 05

① ② ③ ④ ⑤

RoHS

CE UK CA

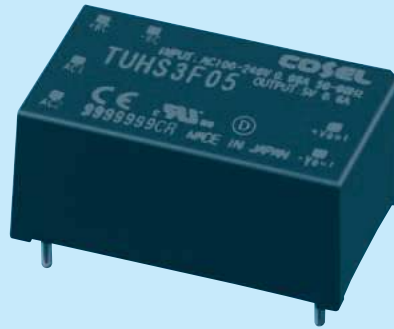

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal Input
- ⑤ Output voltage

□ Class II

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
 * To use TUHS, external components are required. Refer to the instruction manual for details.





| MODEL | TUHS3F05 | TUHS3F12 | TUHS3F15 | TUHS3F24 |
|-----------------------|----------|-----------|----------|-----------|
| MAX OUTPUT WATTAGE[W] | 3.00 | 3.00 | 3.00 | 3.12 |
| DC OUTPUT | 5V 0.6A | 12V 0.25A | 15V 0.2A | 24V 0.13A |

SPECIFICATIONS

| | MODEL | TUHS3F05 | TUHS3F12 | TUHS3F15 | TUHS3F24 | |
|-------------------------------|--------------------------------------|---|-------------------|---------------|---------------|--------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ DC120 - 370 | | | | |
| | CURRENT[A] | ACIN 100V | 0.08typ (Io=100%) | | | |
| | | ACIN 200V | 0.05typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50/60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 79typ | 81typ | 81typ | 81typ |
| ACIN 200V | | 78typ | 79typ | 79typ | 79typ | |
| INRUSH CURRENT | Limited by external components | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 0.6 | 0.25 | 0.2 | 0.13 | |
| | LINE REGULATION[mV] | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] | 30 to 100% Load *1 | 120max | 160max | 160max | 200max |
| | | 0 to 30% Load AC85V - 240V *1 | 400max | 480max | 480max | 580max |
| | RIPPLE NOISE[mVp-p] | 30 to 100% Load *1 | 160max | 200max | 200max | 240max |
| | | 0 to 30% Load AC85V - 240V *1 | 480max | 560max | 560max | 660max |
| | TEMPERATURE REGULATION[mV] | 0 to +85°C | 100max | 180max | 240max | 360max |
| | | -40 to +85°C | 150max | 270max | 360max | 480max |
| DRIFT[mV] | *2 | 20max | 48max | 60max | 96max | |
| OUTPUT VOLTAGE SETTING[V] | | 4.90 - 5.30 | 11.40 - 12.60 | 14.25 - 15.75 | 23.00 - 25.00 | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recover automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.50 - 8.00 | 13.20 - 19.20 | 16.50 - 24.00 | 26.40 - 38.40 | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -40 to +85°C, 20 - 95%RH (Non condensing) (Refer to "Derating"), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each along X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN62368-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR-B, EN55022-B *3 | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) (Not built-in to active filter) | | | | |
| OTHERS | CASE SIZE/WEIGHT | 28.7 X 12.7 X 17.5mm[1.13 X 0.50 X 0.69 inches] (W X H X D) / 15g max | | | | |
| | COOLING METHOD | Convection / Forced air | | | | |

*1 Refer to instruction manual for measuring method of electric characteristics.
 *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated value.
 *3 Do not ground secondly circuit, in case of a standard adapted.
 * Measured with 18μF capacitor as Cbc.

External view

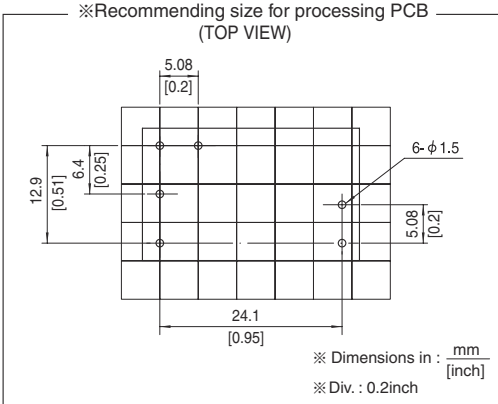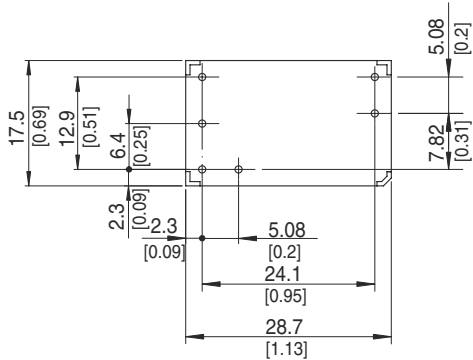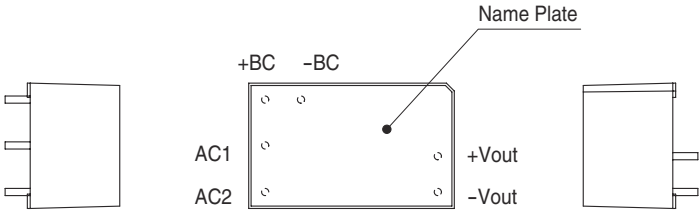

- ※ Tolerance : ± 0.5 [± 0.02]
- ※ Weight : 15g max
- ※ Case material : PBT
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating
- ※ Dimensions in mm, []=inches


TUHS5

TUH S 5 F 05

① ② ③ ④ ⑤

RoHS

CE UK CA

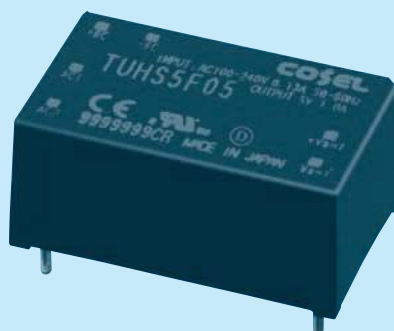

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal Input
- ⑤ Output voltage

□ Class II

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
 * To use TUHS, external components are required. Refer to the instruction manual for details.




| MODEL | TUHS5F05 | TUHS5F12 | TUHS5F15 | TUHS5F24 |
|-----------------------|----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 5.00 | 5.40 | 5.10 | 5.28 |
| DC OUTPUT | 5V 1A | 12V 0.45A | 15V 0.34A | 24V 0.22A |

SPECIFICATIONS

| | MODEL | TUHS5F05 | TUHS5F12 | TUHS5F15 | TUHS5F24 | |
|-------------------------------|--------------------------------------|---|-------------------|---------------|---------------|--------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ DC120 - 370 | | | | |
| | CURRENT[A] | ACIN 100V | 0.13typ (Io=100%) | | | |
| | | ACIN 200V | 0.08typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50/60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 78typ | 82typ | 82typ | 83typ |
| | | ACIN 200V | 79typ | 82typ | 82typ | 83typ |
| INRUSH CURRENT | Limited by external components | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 1 | 0.45 | 0.34 | 0.22 | |
| | LINE REGULATION[mV] | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] | 30 to 100% Load *1 | 120max | 160max | 160max | 200max |
| | | 0 to 30% Load AC85V - 240V *1 | 400max | 480max | 480max | 580max |
| | RIPPLE NOISE[mVp-p] | 30 to 100% Load *1 | 160max | 200max | 200max | 240max |
| | | 0 to 30% Load AC85V - 240V *1 | 480max | 560max | 560max | 660max |
| | TEMPERATURE REGULATION[mV] | 0 to +80°C | 100max | 180max | 240max | 360max |
| | | -40 to +80°C | 150max | 270max | 360max | 480max |
| DRIFT[mV] | *2 | 20max | 48max | 60max | 96max | |
| OUTPUT VOLTAGE SETTING[V] | 4.90 - 5.30 | 11.40 - 12.60 | 14.25 - 15.75 | 23.00 - 25.00 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recover automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.50 - 8.00 | 13.20 - 19.20 | 16.50 - 24.00 | 26.40 - 38.40 | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -40 to +85°C, 20 - 95%RH (Non condensing) (Refer to "Derating"), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each along X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN62368-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR-B, EN55022-B *3 | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) (Not built-in to active filter) | | | | |
| OTHERS | CASE SIZE/WEIGHT | 28.7 X 12.7 X 17.5mm[1.13 X 0.50 X 0.69 inches] (W X H X D) / 15g max | | | | |
| | COOLING METHOD | Convection / Forced air | | | | |

*1 Refer to instruction manual for measuring method of electric characteristics.
 *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated value.
 *3 Do not ground secondly circuit, in case of a standard adapted.
 * Measured with 22μF capacitor as Cbc.

External view

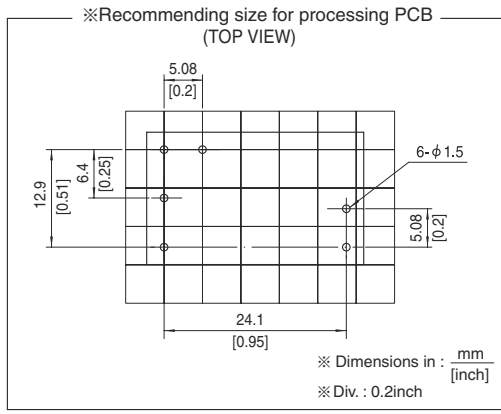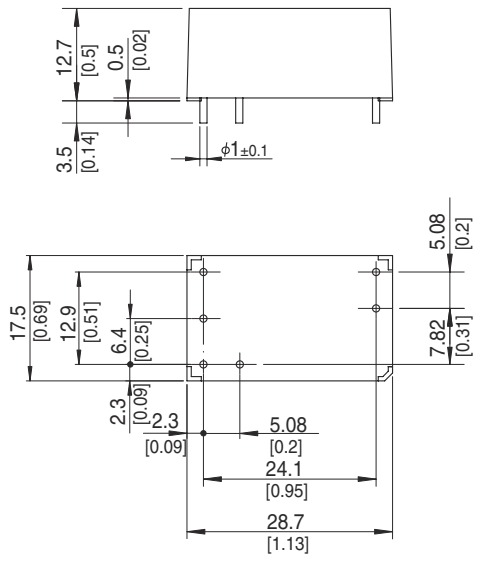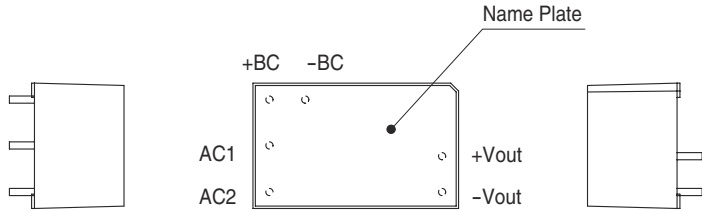

- ※ Tolerance : ± 0.5 [± 0.02]
- ※ Weight : 15g max
- ※ Case material : PBT
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating
- ※ Dimensions in mm, []=inches


TUHS10

TUH S 10 F 05

① ② ③ ④ ⑤

RoHS

CE UK CA

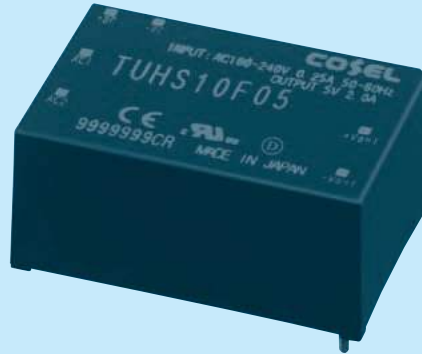

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal Input
- ⑤ Output voltage

□ Class II

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
 * To use TUHS, external components are required. Refer to the instruction manual for details.




| MODEL | TUHS10F05 | TUHS10F12 | TUHS10F15 | TUHS10F24 |
|-----------------------|-----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 10.00 | 10.80 | 10.10 | 10.80 |
| DC OUTPUT | 5V 2A | 12V 0.9A | 15V 0.67A | 24V 0.45A |

SPECIFICATIONS

| | MODEL | TUHS10F05 | TUHS10F12 | TUHS10F15 | TUHS10F24 | |
|-------------------------------|--------------------------------------|---|-------------------|---------------|---------------|--------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ DC120 - 370 | | | | |
| | CURRENT[A] | ACIN 100V | 0.25typ (Io=100%) | | | |
| | | ACIN 200V | 0.14typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50/60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 81typ | 85typ | 85typ | 86typ |
| | | ACIN 200V | 82typ | 85typ | 85typ | 87typ |
| INRUSH CURRENT | Limited by external components | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 2 | 0.9 | 0.67 | 0.45 | |
| | LINE REGULATION[mV] | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] | 30 to 100% Load *1 | 120max | 160max | 160max | 200max |
| | | 0 to 30% Load AC85V - 240V *1 | 400max | 480max | 480max | 580max |
| | RIPPLE NOISE[mVp-p] | 30 to 100% Load *1 | 160max | 200max | 200max | 240max |
| | | 0 to 30% Load AC85V - 240V *1 | 480max | 560max | 560max | 660max |
| | TEMPERATURE REGULATION[mV] | 0 to +70°C | 100max | 180max | 240max | 360max |
| | | -40 to +70°C | 150max | 270max | 360max | 480max |
| DRIFT[mV] | *2 | 20max | 48max | 60max | 96max | |
| OUTPUT VOLTAGE SETTING[V] | 4.90 - 5.30 | 11.40 - 12.60 | 14.25 - 15.75 | 23.00 - 25.00 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recover automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.50 - 8.00 | 13.20 - 19.20 | 16.50 - 24.00 | 26.40 - 38.40 | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -40 to +85°C, 20 - 95%RH (Non condensing) (Refer to "Derating"), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each along X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN62368-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR-B, EN55022-B *3 | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) (Not built-in to active filter) | | | | |
| OTHERS | CASE SIZE/WEIGHT | 33.0 X 15.0 X 22.0mm [1.3 X 0.59 X 0.86 inches] (W X H X D) / 25g max | | | | |
| | COOLING METHOD | Convection / Forced air | | | | |

*1 Refer to instruction manual for measuring method of electric characteristics.
 *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated value.
 *3 Do not ground secondly circuit, in case of a standard adapted.
 * Measured with 47μF capacitor as Cbc.

External view

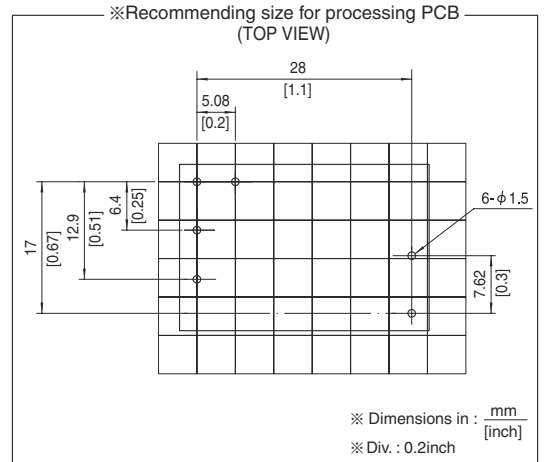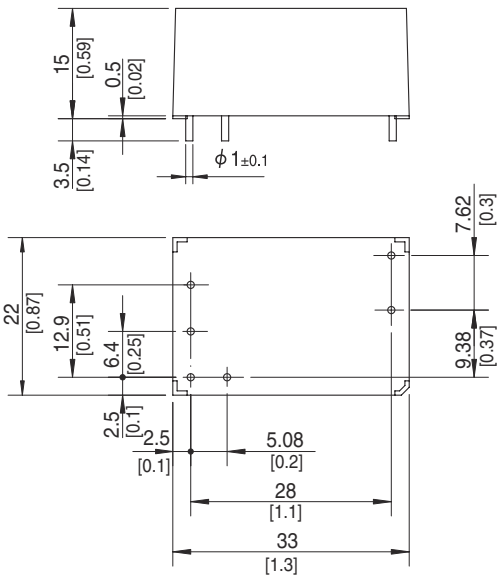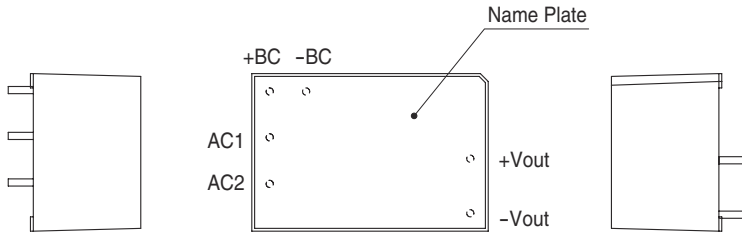

- ※ Tolerance : ± 0.5 [± 0.02]
- ※ Weight : 25g max
- ※ Case material : PBT
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating
- ※ Dimensions in mm, []=inches


TUHS15

TUH S 15 F 12

① ② ③ ④ ⑤

RoHS

CE UK CA

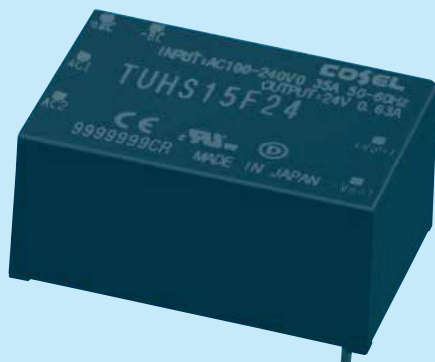

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal Input
- ⑤ Output voltage

□ Class II

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
 * To use TUHS, external components are required. Refer to the instruction manual for details.




| MODEL | TUHS15F12 | TUHS15F15 | TUHS15F24 |
|-----------------------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 15.00 | 15.00 | 15.12 |
| DC OUTPUT | 12V 1.25A | 15V 1A | 24V 0.63A |

SPECIFICATIONS

| | MODEL | TUHS15F12 | TUHS15F15 | TUHS15F24 | |
|-------------------------------|--------------------------------------|---|-------------------|---------------|--------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ DC120 - 370 | | | |
| | CURRENT[A] | ACIN 100V | 0.35typ (Io=100%) | | |
| | | ACIN 200V | 0.18typ (Io=100%) | | |
| | FREQUENCY[Hz] | 50/60 (47 - 63) | | | |
| | EFFICIENCY[%] | ACIN 100V | 85typ | 85typ | 86typ |
| | | ACIN 200V | 85typ | 85typ | 87typ |
| INRUSH CURRENT | Limited by external components | | | | |
| OUTPUT | VOLTAGE[V] | 12 | 15 | 24 | |
| | CURRENT[A] | 1.25 | 1 | 0.63 | |
| | LINE REGULATION[mV] | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] | 30 to 100% Load *1 | 160max | 160max | 200max |
| | | 0 to 30% Load AC85V - 240V *1 | 480max | 480max | 580max |
| | RIPPLE NOISE[mVp-p] | 30 to 100% Load *1 | 200max | 200max | 240max |
| | | 0 to 30% Load AC85V - 240V *1 | 560max | 560max | 660max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C | 180max | 240max | 360max |
| | | -40 to +50°C | 270max | 360max | 480max |
| DRIFT[mV] | *2 | 48max | 60max | 96max | |
| OUTPUT VOLTAGE SETTING[V] | 11.40 - 12.60 | 14.25 - 15.75 | 23.00 - 25.00 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recover automatically | | | |
| | OVERVOLTAGE PROTECTION[V] | 13.20 - 19.20 | 16.50 - 24.00 | 26.40 - 38.40 | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C) | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -40 to +85°C, 20 - 95%RH (Non condensing) (Refer to "Derating"), 3,000m (10,000 feet) max | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max | | | |
| | VIBRATION | 10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each along X, Y and Z axis | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN62368-1 | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR-B, EN55022-B *3 | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) (Not built-in to active filter) | | | |
| OTHERS | CASE SIZE/WEIGHT | 33.0 X 15.0 X 22.0mm [1.3 X 0.59 X 0.86 inches] (W X H X D) / 25g max | | | |
| | COOLING METHOD | Convection / Forced air | | | |

*1 Refer to instruction manual for measuring method of electric characteristics.
 *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated value.
 *3 Do not ground secondly circuit, in case of a standard adapted.
 * Measured with 68μF capacitor as Cbc.

External view

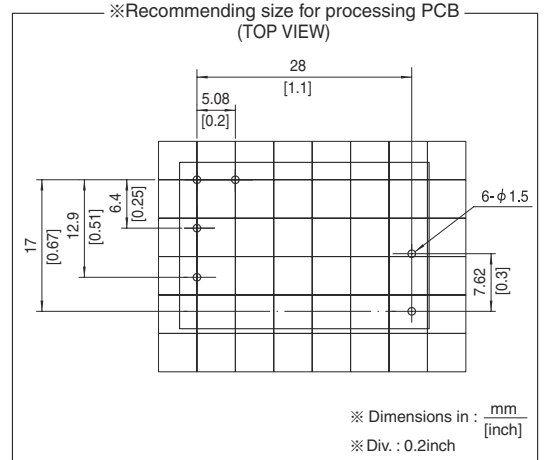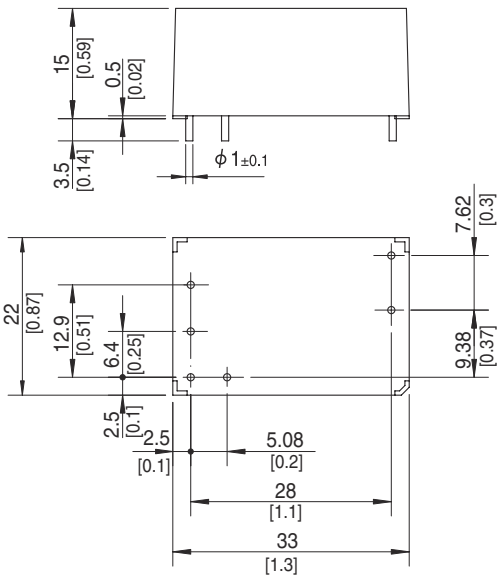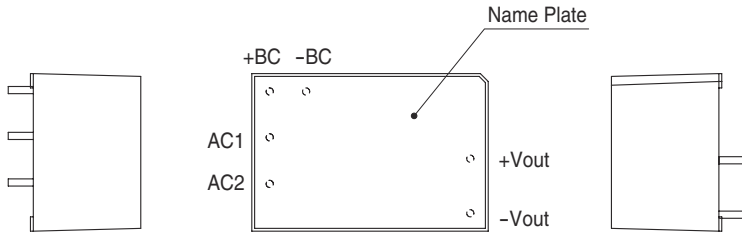


- ※ Tolerance : ± 0.5 [± 0.02]
- ※ Weight : 25g max
- ※ Case material : PBT
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating
- ※ Dimensions in mm, []=inches

TUHS25

TUH S 25 F 05

① ② ③ ④ ⑤

CE UK CA
RoHS

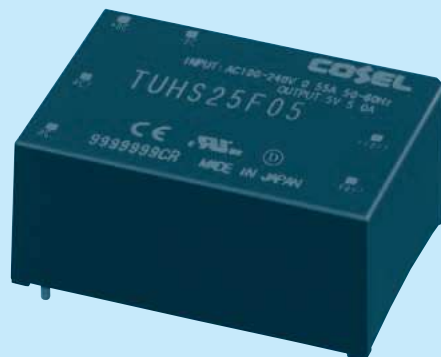

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal Input
- ⑤ Output voltage

□ Class II

* Avoid short circuit between +BC and -BC. It may cause the failure of inside components.
* To use TUHS, external components are required. Refer to the instruction manual for details.





| MODEL | TUHS25F05 | TUHS25F12 | TUHS25F15 | TUHS25F24 |
|-----------------------|-----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 25.00 | 25.20 | 25.50 | 26.40 |
| DC OUTPUT | 5V 5A | 12V 2.1A | 15V 1.7A | 24V 1.1A |

SPECIFICATIONS

| | MODEL | TUHS25F05 | TUHS25F12 | TUHS25F15 | TUHS25F24 | |
|-------------------------------|--------------------------------------|---|-------------------|---------------|---------------|--------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ DC120 - 370 | | | | |
| | CURRENT[A] | ACIN 100V | 0.55typ (Io=100%) | | | |
| | | ACIN 200V | 0.35typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50/60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 87typ | 88typ | 88typ | 89typ |
| | | ACIN 200V | 87typ | 88typ | 88typ | 90typ |
| INRUSH CURRENT | Limited by external components | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 5 | 2.1 | 1.7 | 1.1 | |
| | LINE REGULATION[mV] | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] | 30 to 100% Load *1 | 120max | 160max | 160max | 200max |
| | | 0 to 30% Load AC85V - 240V *1 | 400max | 480max | 480max | 580max |
| | RIPPLE NOISE[mVp-p] | 30 to 100% Load *1 | 160max | 200max | 200max | 240max |
| | | 0 to 30% Load AC85V - 240V *1 | 480max | 560max | 560max | 660max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C | 100max | 180max | 240max | 360max |
| | | -40 to +50°C | 150max | 270max | 360max | 480max |
| DRIFT[mV] | *2 | 20max | 48max | 60max | 96max | |
| OUTPUT VOLTAGE SETTING[V] | 4.90 - 5.30 | 11.40 - 12.60 | 14.25 - 15.75 | 23.00 - 25.00 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recover automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.50 - 8.00 | 13.20 - 19.20 | 16.50 - 24.00 | 26.40 - 38.40 | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -40 to +85°C, 20 - 95%RH (Non condensing) (Refer to "Derating"), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each along X, Y and Z axis | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN62368-1 | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR-B, EN55022-B *3 | | | | |
| | HARMONIC ATTENUATOR | Complies with IEC61000-3-2 (Class A) (Not built-in to active filter) | | | | |
| OTHERS | CASE SIZE/WEIGHT | 36.0 X 16.5 X 25.4mm [1.42 X 0.65 X 1.0 inches] (W X H X D) / 40g max | | | | |
| | COOLING METHOD | Convection / Forced air | | | | |

*1 Refer to instruction manual for measuring method of electric characteristics.
*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated value.
*3 Do not ground secondly circuit, in case of a standard adapted.
* Measured with 120μF capacitor as Cbc.


External view

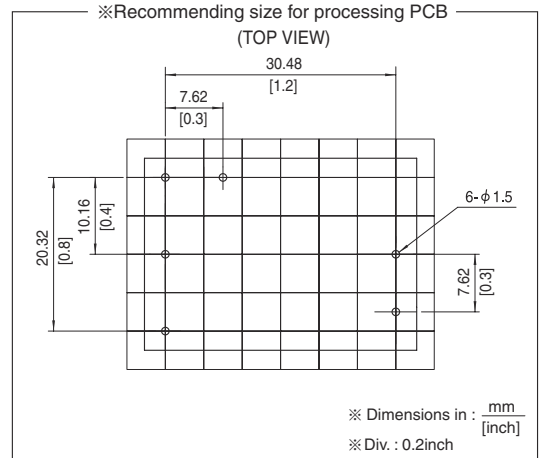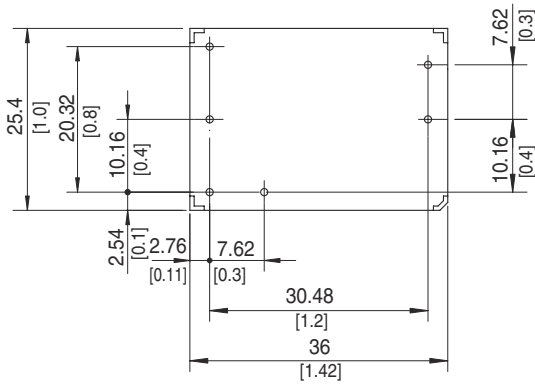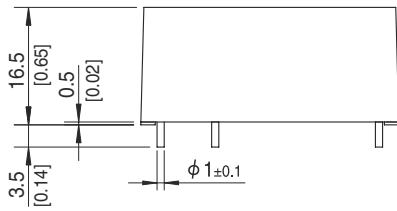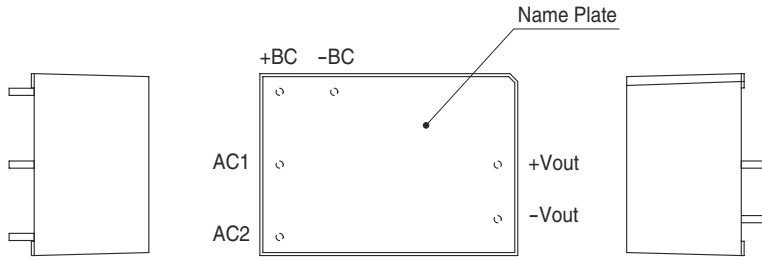

- ※ Tolerance : ±0.5 [±0.02]
- ※ Weight : 40g max
- ※ Case material : PBT
- ※ Pin material : Copper
- ※ Plating treatment of pin : Lead free plating
- ※ Dimensions in mm, []=inches


Pin Configuration

●TUHS3/TUHS5




| No. | Pin Connection | Function |
|-----|----------------|------------|
| ① | AC1 | AC input |
| ② | AC2 | |
| ③ | +BC | +BC output |
| ④ | -BC | -BC output |
| ⑤ | +VOUT | +DC output |
| ⑥ | -VOUT | -DC output |

●TUHS10/TUHS15

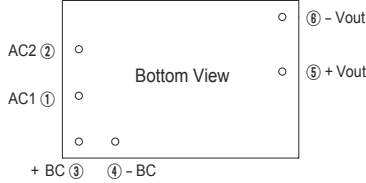

●TUHS25

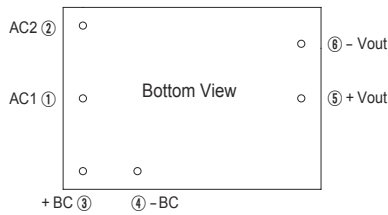


Implementation • Mounting Method

Mounting method

- The unit can be mounted in any direction. When two or more power supplies are used side by side, position them with proper intervals to allow enough air ventilation. The temperature around each power supply should not exceed the temperature range shown in derating curve.
- Avoid placing the AC input line pattern layout underneath the unit. It will increase the line conducted noise. Make sure to leave an ample distance between the line pattern layout and the unit. Also avoid placing the DC output line pattern underneath the unit because it may increase the output noise. Lay out the pattern away from the unit.
- Avoid placing the signal line pattern layout underneath the unit because the power supply might become unstable. Lay out the pattern away from the unit.

Stress to the pins

- Applying excessive stress to the input or output pins of the power module may damage internal connections. Avoid applying stress in excess of that shown in right figure.
- Input/output pin are soldered to the PCB internally. Do not pull or bend a lead powerfully.
- If it is expected that stress is applied to the input/output pin due to vibration or impact, reduce the stress to the pin by taking such measures as fixing the unit to the PCB by silicone rubber, etc.




Soldering


- Flow soldering: 260°C for up to 15 seconds.
- Soldering iron (26W): 450°C for up to 5 seconds.

Derating

●Derating curve for input voltage




(a)TUHS3




(b)TUHS5, TUHS10, TUHS15, TUHS25

Derating


- TUHS3F Ambient temperature derating curve (Reference value)

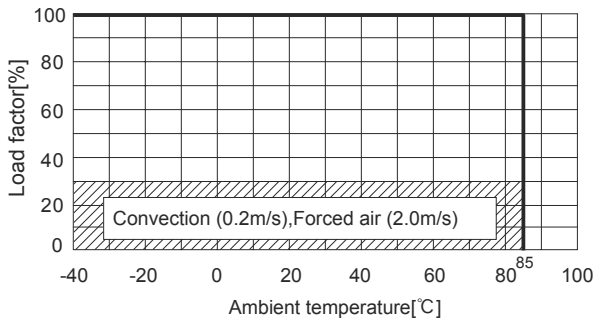


- TUHS5F Ambient temperature derating curve at convection cooling (Reference value)

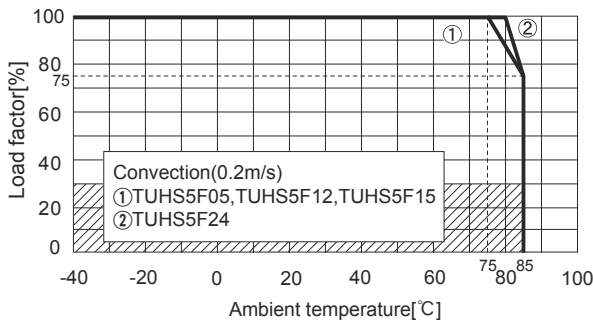


- TUHS5F Ambient temperature derating curve at forced air (Reference value)

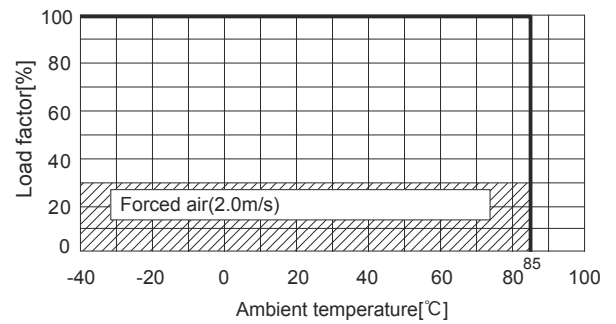


- TUHS10F Ambient temperature derating curve at convection cooling (Reference value)

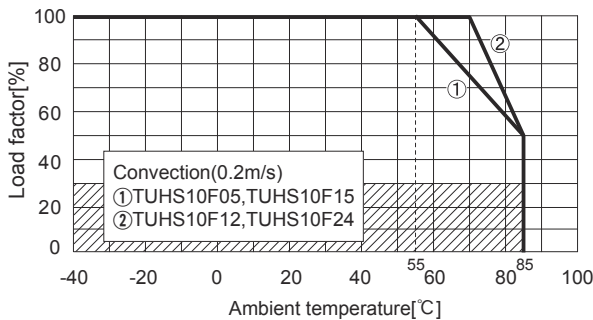


- TUHS10F Ambient temperature derating curve at forced air (Reference value)

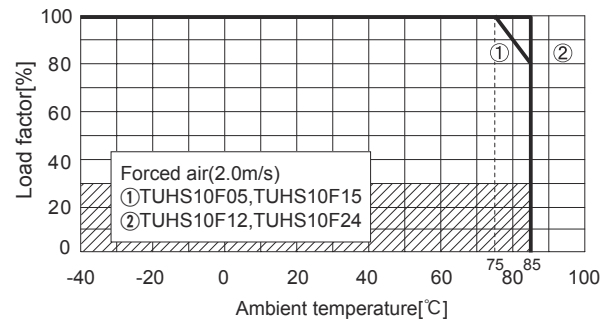

- TUHS15F Ambient temperature derating curve at convection cooling (Reference value)

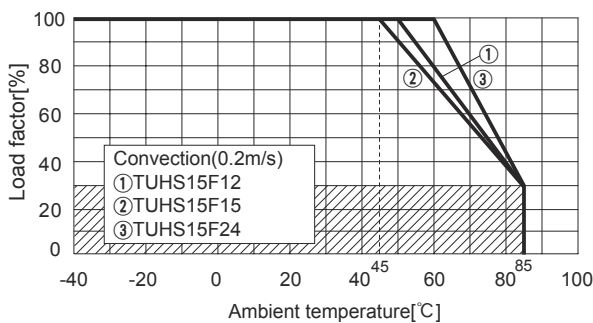


- TUHS15F Ambient temperature derating curve at forced air (Reference value)

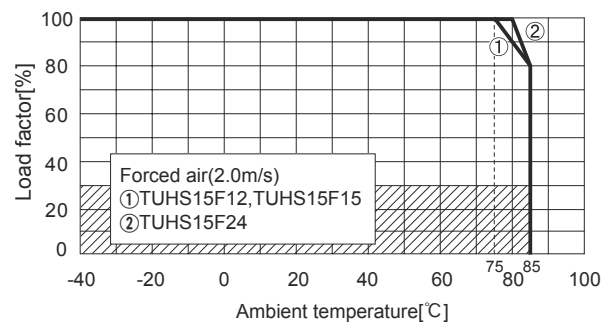


Derating

● TUHS25F Ambient temperature derating curve at convection cooling (Reference value)

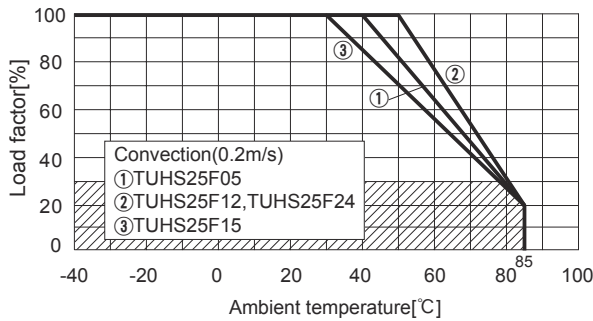

● TUHS25F Ambient temperature derating curve at forced air (Reference value)

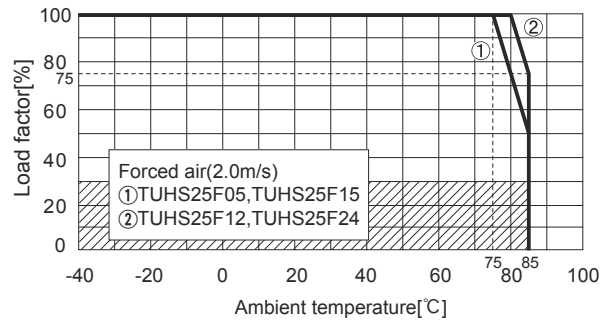

- Derating curve is shown below. Note: In the hatched area, the specification of Ripple, Ripple Noise is different from other area.
- Please have sufficient ventilation to keep the temperature of point A in Instruction Manual6. Please also make sure that the ambient temperature does not exceed 85C.

Instruction Manual

- ◆ It is necessary to read the "Instruction Manual" and "Before using our product" before you use our product.

Instruction Manual <https://www.cosel.co.jp/redirect/catalog/en/TUHS/>
 Before using our product <https://en.cosel.co.jp/technical/caution/index.html>

TUHS



NOTICE



Basic Characteristics Data

| Model | Circuit method | Switching frequency [kHz] | Input current [A] | Inrush current protection circuit | PCB/Pattern | | | Series/Parallel operation availability | |
|---------|-------------------|---------------------------|-------------------|-----------------------------------|-------------------------------|--------------|--------------|--|--------------------|
| | | | | | Material | Single sided | Double sided | Series operation | Parallel operation |
| TUHS3F | Flyback converter | 80-250 *3 | *1 | Resistor | glass fabric base,epoxy resin | | Yes | Yes | *2 |
| TUHS5F | Flyback converter | 80-250 *3 | *1 | Resistor | glass fabric base,epoxy resin | | Yes | Yes | *2 |
| TUHS10F | Flyback converter | 80-250 *3 | *1 | Resistor | glass fabric base,epoxy resin | | Yes | Yes | *2 |
| TUHS15F | Flyback converter | 80-250 *3 | *1 | Resistor | glass fabric base,epoxy resin | | Yes | Yes | *2 |
| TUHS25F | Flyback converter | 80-250 *3 | *1 | Thermistor | glass fabric base,epoxy resin | | Yes | Yes | *2 |

*1 Refer to Specification.

*2 Refer to instruction manual.

*3 The value changes depending on input and load.