

DA18W440C1040BF-0000

Constant Current Driver



Efficiency	85%
Power Factor	>0.95
Case TC	90°C Max.
Protection	Input / Output
Storage	-30°C / +90°C
Humidity	95% RH Max.
IP Rating	IP65
Class	Class 2 Power Supply
Dimming	ELV, TRIAC
Constant Current	440mA



RoHS



- Isolated output power per NEC and UL safety requirements
- UL and ETL recognized / Listed, UL8750, 1310
- Auto-reset; Short circuit, overload and thermal protection
- Dimmable with ELV and TRIAC type dimmers



FEATURES

- Aluminum casing for optimal heat dissipation
- Low profile, small form factor, junction box mountable
- Class 2 power supply and other than Class 2 options
- Efficient, high power factor, low THD, FCC compliant

MODEL SPECIFICATIONS

CONSTANT CURRENT					
Model Number	Input Voltage	Wattage	Output Voltage	Output Current	Available Form Factor
DA18W440C1040BF-0000	120V AC	18W	10V - 40V LED	440mA	BF

DIMMING CURVES

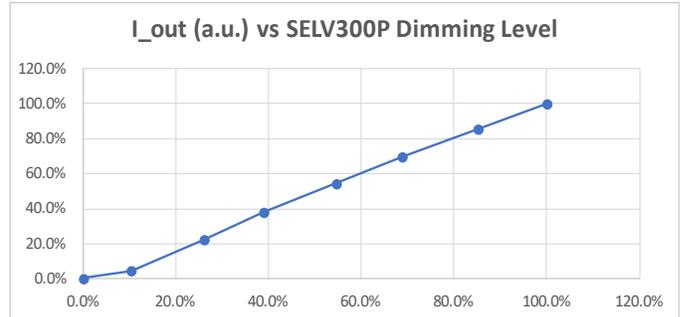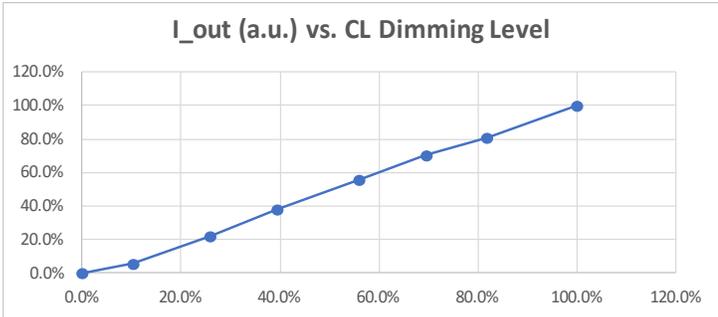

Model tested: DA18W440C2747BF-3001

MECHANICAL SPECS

FORM FACTOR	DIMENSIONS
BF (with studs)	3" (77mm) x 0.8" (21mm) x 0.8" (21mm)

BF

