

8-port 3-pin M8 Female to 12-pin M12 Male Junction Block



Features

8-port Junction Block




Banner's Junction Blocks are designed to reduce wiring and to simplify connecting multiple products.

- 3-pin M8 female termination with 12-pin M12 male connector
- 8 ports
- NPN, PNP, and discrete models available
- 8 Signals, Pin 4 each Port

Models


Model	Output	Indication
JB-8M8-M12-P4	PNP	LED
JB-8M8-M12-N4	NPN	
JB-8M8-M12-4	Discrete	Non-LED

Wiring

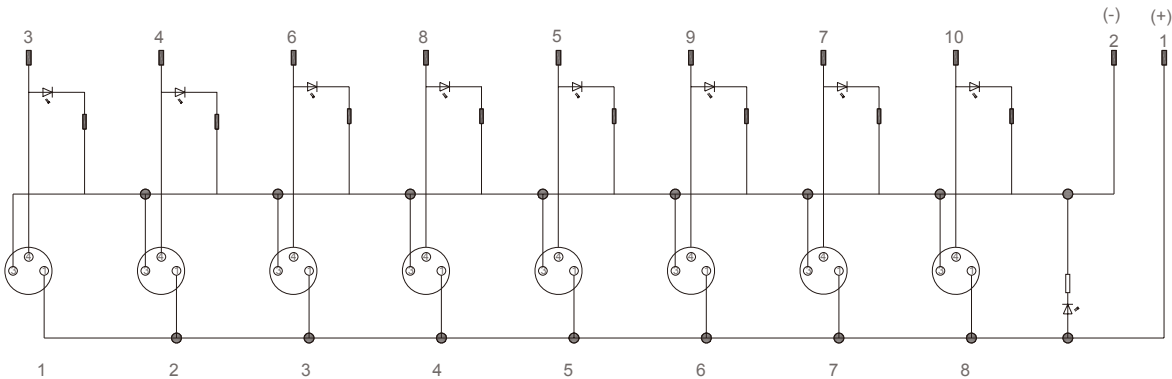


LED Indicating PNP
Other circuit diagram (NPN) can be customized

3-pin M8 Female Pinout



- 1 = Brown
- 3 = Blue
- 4 = Black

12-pin M12 Male Pinout



- 1 = White
 - 2 = Brown
 - 3 = Green
 - 4 = Yellow
 - 5 = Gray
 - 6 = Pink
- 7 = Blue
 - 8 = Red
 - 9 = Orange
 - 10 = Tyrian Purple
 - 11 = Black
 - 12 = Violet



Specifications

Voltage

LED models: 30 V DC
Non-LED models: 60 V DC

Rated Current

1A per port / 3A total

Indicators (LED models only)

Power LED: Red (0 or 8, depending on model)
Signal LED: Amber (0 or 1, depending on model)

Construction

Body: PBT
Coupling nut: Nickel-plated brass

Vibration

Method: EN 60068-2-6:2008
Frequency Range: 10-55 Hz (Sine)
Amplitude: 0.5 mm
Sweep Cycle Duration: 5 minutes (2.5 min per sweep)
Dwell Duration at resonant frequency: 30 Minutes

Mechanical Shock

Method: EN 60068-2-27:2009
Pulse Shape: Half-Sine
Peak Acceleration: 30 G
Duration of the pulse: 11 mS

Environmental Ratings

IP67

Operating Conditions


-25 °C to +80 °C (-13 °F to +176 °F)

Certifications



Dimensions




All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

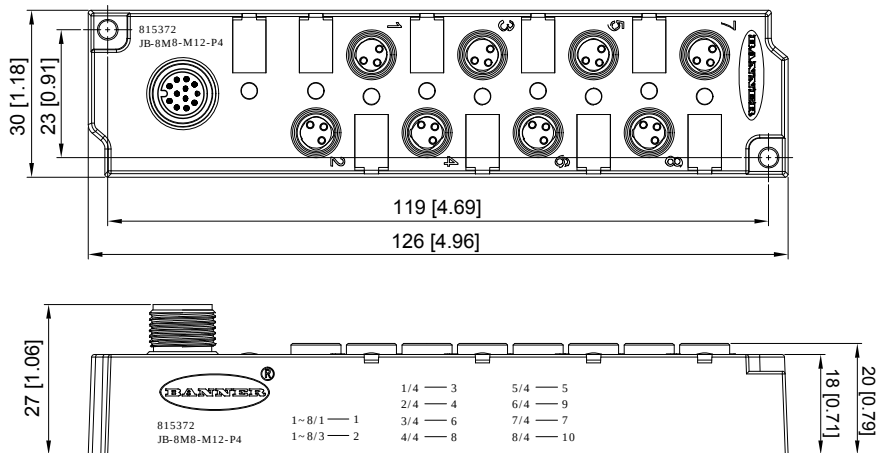

Accessories

Cordsets

Home Run Cordsets

12-pin A-Code Single-Ended M12 Female Cordsets				
Model	Length	Dimensions (mm)	Pinout (Female)	
BC-M12F12-24-2	2 m (6.56 ft)			1 = White 2 = Brown 3 = Green 4 = Yellow 5 = Gray 6 = Pink 7 = Blue 8 = Red 9 = Orange 10 = Tan 11 = Black 12 = Violet
BC-M12F12-24-5	5 m (16.4 ft)			
BC-M12F12-24-10	10 m (30.81 ft)			
BC-M12F12A-24-2	2 m (6.56 ft)			
BC-M12F12A-24-5	5 m (16.4 ft)			
BC-M12F12A-24-10	10 m (30.81 ft)			

12-pin A-Code Double-Ended M12 Female to M12 Male Cordsets				
Model	Length	Dimensions (mm)	Pinout	
BC-M12F12-M12M12-24-2	2 m (6.56 ft)		Female Male 	1 = White 2 = Brown 3 = Green 4 = Yellow 5 = Gray 6 = Pink 7 = Blue 8 = Red 9 = Orange 10 = Tan 11 = Black 12 = Violet
BC-M12F12-M12M12-24-5	5 m (16.4 ft)			
BC-M12F12-M12M12-24-10	10 m (30.81 ft)			

Signal Port Cordsets

3-pin Double-Ended M8 Female to M8 Male Cordsets (datasheet p/n 236620)				
Model	Length	Dimensions (mm)	Pinout	
BC-M8F3-M8M3-24-0.5	0.5 m (1.64 ft)		Female Male 	1 = Brown 3 = Blue 4 = Black
BC-M8F3-M8M3-24-1	1 m (3.28 ft)			
BC-M8F3-M8M3-24-2	2 m (6.56 ft)			
BC-M8F3-M8M3-24-5	5 m (16.4 ft)			
BC-M8F3-M8M3-24-8	8 m (26.25 ft)			
BC-M8F3-M8M3-24-10	10 m (30.81 ft)			

Product Support and Maintenance

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. | 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.