

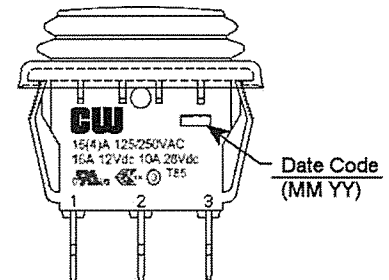
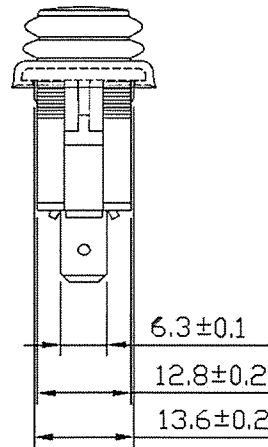


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 125V/250VAC 16A 12Vdc 10A 28Vdc		
	Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temp.	- 25 ° C ~ 85 ° C		
Switch Function	3P SPDT ON - OFF - ON		

Mounting Hole			Circuit Diagram
			
Thickness	X	Y	
0.75....2.5	27.6-0.1	13.8+0.1	
2.5....3.5	27.8-0.1	13.8+0.1	
3.5....4.5	28.0-0.1	13.8+0.1	

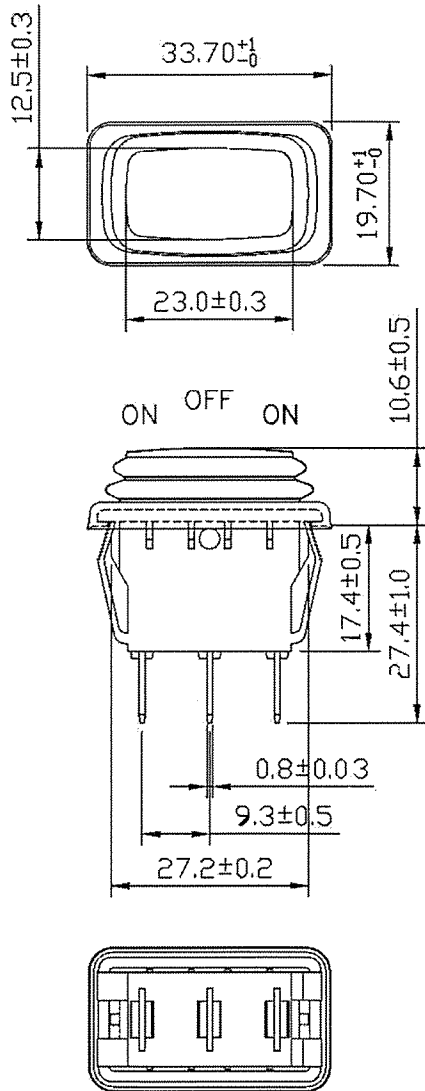

Order Chart						
Series	Frame Color					
GRB238	D8	01	B	B	Z	Rating
Function		Terminal Type		Actuator Color		
(Replacing GRB238D801BB)						

R13-238D8-01

CW INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Date Drawn: 1/22/18

Rev. 0

Unit: mm

Checked By: *G. GULD*

Title:
ROCKER SWITCH

CW P/N:
GRB238D801BBZ