

5.0Amp Super Fast Recovery Surface Mounted Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Idea for printed circuit board
- Glass passivated junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed
260°C/10 seconds at terminals

Mechanical Data


Case : Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750,Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.0035 ounce, 0.098 grams

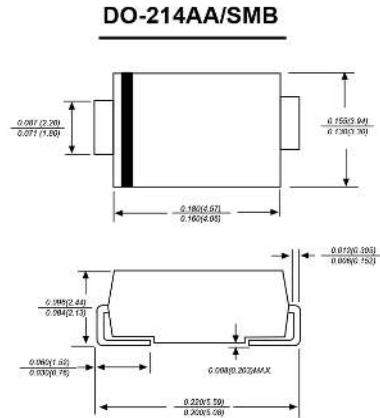

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

| Parameter | SYMBOLS | ES5AB | ES5BB | ES5CB | ES5DB | ES5FB | ES5GB | ES5JB | UNITS |
|---|-----------------|-------------|-------|-------|-------|-------|-------|-------|---------------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 105 | 140 | 210 | 280 | 420 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| Maximum average forward rectified current at $T_L=100^\circ\text{C}$ | $I_{(AV)}$ | 5.0 | | | | | | | A |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load | I_{FSM} | 150.0 | | | | | | | A |
| Maximum instantaneous forward voltage at 5.0A | V_F | 1.0 | | | 1.3 | | 1.7 | | V |
| Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$ | I_R | 2.0 | | | | 200 | | | μA |
| Maximum reverse recovery time(Note 1) | T_{rr} | 35 | | | | | | | ns |
| Typical junction capacitance (Note2) | C_j | 75.0 | | | | | | | pF |
| Typical thermal resistance | $R_{\theta JA}$ | 60.0 | | | | | | | $^\circ\text{C}/\text{W}$ |
| Operating junction and storage temperature range | T_J, T_{STG} | -55 to +150 | | | | | | | $^\circ\text{C}$ |

Note: 1.Reverse recovery time test condition: $I_F=0.5A$ $I_R=1.0A$ $I_{rr}=0.25A$

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

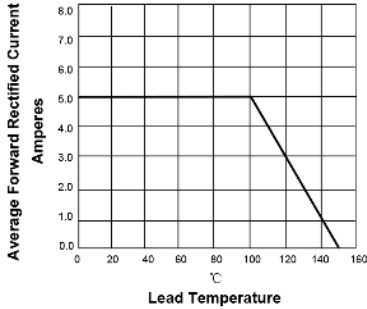


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG

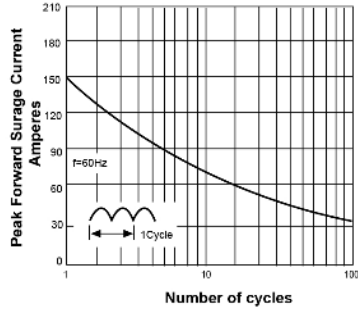


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS



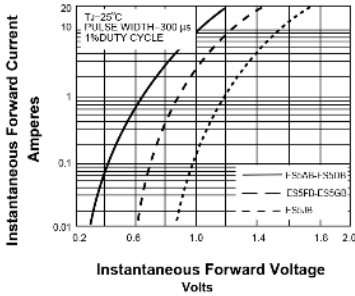


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

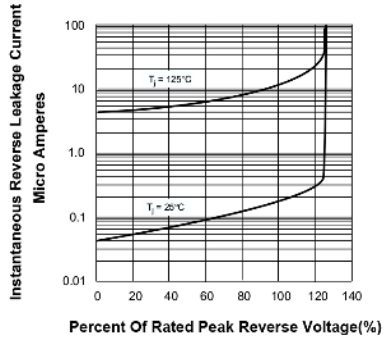

Suggested Pad Layout

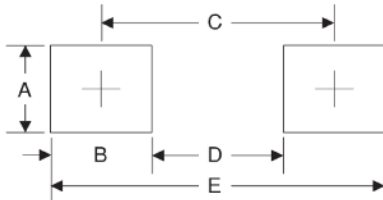

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 2.30 | 0.091 |
| B | 2.00 | 0.078 |
| C | 4.10 | 0.161 |
| D | 2.10 | 0.083 |
| E | 6.10 | 0.240 |